

PRACTICAL FLYING

COMPLETE COURSE OF
FLYING INSTRUCTION

By a
FLIGHT COMMANDER


TEMPLE PRESS LIMITED
745 ROSEBERY AVENUE.
LONDON E.C.1.



A MANUAL ON
FLYING DEALING
WITH THE MOST
RECENTLY ADOPTED
METHODS OF TUITION
IN THE COMPLETE
FLYING COURSE.
WRITTEN AND
ILLUSTRATED BY
EXPERIENCED
FLYING OFFICERS.



A NIGHT LANDING.

Aided by the light of a parachute flare, dropped from the machine, and wing tip flares.

See page 202.

PRACTICAL FLYING

COMPLETE COURSE OF FLYING INSTRUCTION

With an Introduction by
Major-General W. S. BRANCKER, C.M.G.,
Comptroller-General of Equipment
of the Royal Air Force.

By
Flight-Commander W. G. McMINNIES, R.N.

Illustrated by
Flight-Lieutenant E. L. FORD, R.N.

With a chapter on the medical
aspects of Aviation by
H. GRAEM ANDERSON,
M.B., Ch.B., F.R.C.S.

TEMPLE PRESS LIMITED

(Publishers of "The Motor," "The Commercial
Motor," "The Motor Ship and Motor Boat,"
"The Light Car and Cyclecar," "Motor Cycling," etc.)

7-15, ROSEBERY AVENUE, LONDON, E.C.1.

Wholesale:
E. J. LARBY, Ltd., 30, Paternoster Row, LONDON, E.C.4.

1918.

INTRODUCTION

By MAJOR-GENERAL BRANCKER

THIS book appears at a propitious moment; the Royal Air Force is in the throes of creation, and the strong individualities of the Royal Naval Air Service and the Royal Flying Corps are in the course of fusion.

It is the work of a Royal Naval Air Service officer, and besides being a valuable addition to existing official publications, it reveals to the pilots of the Royal Flying Corps the principles and methods of the Service with which they are to share a great and glorious future.

Aviation has shown the world some wonderful steps in progress during this War, not the least noteworthy of which has been the advance made in our methods of training. Experience, courage and patience have built up a system which has completely revolutionized old ideas, and pilots to-day are performing evolutions with the utmost confidence which eighteen months ago meant almost certain death.

The responsibilities of the flying instructor are great, and his work hard and unceasing. His is the dull round of duty day after day, without the glamour and excitement of service in the Field, and often without the appreciation which it deserves. It is, however, on his courage, patience and energy that we depend for the maintenance in the future of that individual superiority which our pilots have so clearly demonstrated in the past.

Every day confirms the growing importance of aviation in war; indeed, it seems that all other means of bringing the enemy to his knees have almost ceased to progress, whilst our aerial fleets go on expanding and improving until at last they will bring us victory.

20th March, 1918.

W M Brancker
Major General

PREFACE.

EVERY prospective pilot who is really interested in his work must have been struck with the dearth of literature dealing with practical flying. When the writer was learning to fly he searched everywhere for practical information on aviation, and studied all the available literature on the subject, but found most of it lacking in the very features he required. Even to-day, most books on flying are either far too advanced, dealing principally with the theoretical aspect of aviation, or else contain historical and personal, instead of practical, reminiscences. There seem to be few books written by experienced pilots in such simple language that a man who had never seen an aeroplane before might understand and appreciate the information, hints and advice given. It has been the writer's object to produce such a book, giving as much useful and practical information on elementary flying as space permitted. It is not pretended that it possesses any great literary merit, but it is hoped that it may be of use to those now learning to fly, as a good deal of the matter was originally given in lecture form to officers when undergoing their preliminary training at a flying school. It does not pretend to appeal to the expert pilot or the individual interested in the more technical or theoretical side of aviation. The idea has been rather to present to the prospective pilot, in terms that can be easily understood, a general impression of how flying is taught and learned. Forewarned is forearmed, and it is hoped that, by studying the advice and hints contained in the chapters on elementary flying, the beginner will be able to avoid many of the mistakes so commonly made while under instruction.

At the moment of going to press, the fusion of the Royal Naval Air Service and the Royal Flying Corps is taking place, and by the time the book is in the

PRACTICAL FLYING

hands of the reader it is anticipated that the flying services will be consolidated under the title of the Royal Air Force.

Owing to the rapid changes which take place in flying, training systems and machines may also vary from time to time as new and improved methods are introduced, and, therefore, due allowance must be made for them in reading the book. If any important corrections are necessary between the time the bulk of the pages go to press and publication, they will be found in an addendum at the end.

Both R.F.C. and R.N.A.S. officers who were instructing at the same flying school as the writer have rendered him valuable assistance in producing the book, and his thanks are due to them for their suggestions and advice.

The sections of the Ordnance Survey maps and Characteristic Sheet, facing pages 120, 121 and 137, are reproduced with the sanction of H.M. Stationery Office.

CONTENTS

INTRODUCTION BY MAJOR-GENERAL BRANCKER	III
PREFACE	IV
CONTENTS	VI

CHAPTER I

PRELIMINARY CONSIDERATIONS

Men that Make Good Pilots—Safety of Flying—Summary of Preliminary Studies	1
---	---

CHAPTER II

THEORY AND PRACTICE OF FLIGHT

Principles of Flight—Explanatory Description of the Controls—The Engine—Aeroplane Construction	7
--	---

CHAPTER III

ELEMENTARY PRINCIPLES OF AEROPLANE ENGINES AND CAUSES OF ENGINE TROUBLE

How a Four-cycle Engine Works—Valve Systems of Different Types—Stationary and Rotary Engines—Parts that Give Trouble—Diagnosing Engine Breakdowns—Common Engine Failures—General Hints on Running an Engine	21
---	----

CHAPTER IV

THE FIRST LESSON IN THE AIR

Flying Straight, Laterally and Horizontally Level—Bumps, Turning—Getting Off and Landing—When To Take the First Solo Flight	45
---	----

CHAPTER V

PAGE

THE FIRST SOLO FLIGHT AND AERODROME PRACTICE

Preliminary Attention to Engine and Machine—Starting Up—Signals to Mechanics—Getting Off—Turning—At 1000 ft. Up—The Rule of the Air—Landing—Taxying—Obtaining a Pilot's Certificate	63
---	----

CHAPTER VI

THE USE AND WORKING OF THE INSTRUMENTS

The Principal Instruments Used—Their Working—How One May be Substituted for Another	88
---	----

CHAPTER VII

MAP READING

Principal Terms Used—Reckoning the Scale—Contours—Features—Map Symbols—Ideal Map for Aviation	113
---	-----

CHAPTER VIII

PREPARING FOR A CROSS-COUNTRY FLIGHT

Marking up a Map—Working out Deviation—Swinging a Compass—The Wind Factor—Calculating Radius of Action—Finding One's Bearings—The Inter-relationship of Landmarks—How to Carry the Map—Position and Comfort—Clothing—Goggles	123
--	-----

CHAPTER IX

CROSS-COUNTRY FLYING

The Height to Fly—Storms, Fog and Clouds—Taking Bearings in Day-time and at Night—Landing on Strange Ground—Restarting from a Field—A Forced Landing—Making Use of the Wind when Landing—Selecting Suitable Landing Ground—Making an "S" Turn—Turning Near the Ground—Steps to Take After a Forced Landing—Starting Up Without Aid—Swinging a Propeller—Starting a Rotary Engine—Causes of Engine Failures—Examples of Good and Bad Airmanship	144
--	-----

CHAPTER X

MORE ADVANCED FLYING

An Ascent of 10,000 ft.—A Vertical Bank—Spiral Descents—"Zooming"—Nose Diving—Looping—Tail Sliding and Spinning—Horizontal Rolling—Rolling and Staggering—The Immelmann Turn—Exhibition Trick Flying	184
--	-----

CHAPTER XI

NIGHT FLYING

PAGE

Aerodrome Lighting—Daylight Practice—Getting Off at Night—Night Landing—Night-flying Equipment—Setting Out an Aerodrome	193
---	-----

CHAPTER XII

THE GROWTH OF CONFIDENCE—A WORD BOTH TO INSTRUCTORS AND PUPILS

Instilling Confidence—After a Crash—Advantages of Considerable Practice—Advanced Dual Control—When a Pupil Can Fly—The Time Taken in Learning	205
---	-----

CHAPTER XIII

THE MEDICAL ASPECTS OF AVIATION WITH SOME NOTES ON SUITABLE CLOTHING

By H. Graem Anderson, M.B., Ch.B., F.R.C.S.,
Temp. Surgeon R.N., Attached to St. Mark's
and the Belgrave Hospitals

Physical Fitness—Reflex Actions—The Visual Reflex—The Auditory Reflex—Tactile and Muscular Reflexes—The Balancing Reflex—Drinking and Smoking—Over Confidence—What to Wear—Frostbite—Air Sickness	212
---	-----

APPENDIX

Flying Instruction Notes in Brief—General and Condensed Hints in Definite Stages for the Guidance of Pupils	217
Glossary of Terms Commonly Used in Aviation	226

SPECIAL ILLUSTRATIONS

A Night Landing	FRONTISPIECE
Explanatory Chart of the Characteristic Features Used in Ordnance Survey Maps	to face page 120
A Reproduction from the One-inch Ordnance Survey	to face page 121
Section of the Ordnance Survey to Illustrate a Cross-Country Flight	to face page 137

PRACTICAL FLYING.

CHAPTER I.

Preliminary Considerations.

BEFORE deciding to take up aviation, either as a hobby or as a profession, it would be as well for the aspirant to a pilot's certificate to consider whether he is suitable for it, both mentally and physically. Generally speaking, anyone of average health and intelligence can be taught to fly, but at the present time there are comparatively few who will make really first-class pilots. In peace time the demand will be greater for the ordinary class of pilot, and a much lower level of skill will be required than in war time.

Which Men Make Good Pilots?

It is not an easy matter to determine beforehand which men are likely to make good pilots and which are not. Generally speaking, the average man will make a fair pilot. There are a few people who are born aviators, and there are some, either owing to natural nervousness or because flying does not appeal to them, who will never become pilots at all.

Sometimes, before undergoing any instruction whatever, a pupil is subjected to fancy flying with a view to testing his nerves; but such a trial is apt to be misleading in its results. It is far better to instil confidence in a pupil by showing him how safe and secure he is in ordinary flying than to attempt to scare him in his first flights by steep spirals, nose dives, or loops. The growing confidence of a pupil in himself and in his machine should be cultivated.

Many people imagine that motoring or motor cycling forms an excellent apprenticeship to flying; but beyond the fact that these pastimes provide the learner with

useful mechanical knowledge, they will not be found to be of particular value to the aviator. It is the man who has been accustomed to riding and outdoor games who proves quickest at picking up the feel of an aeroplane and whose eye more rapidly adapts itself to the speeds and angles encountered when flying.


During his first few flights the pupil will have to accustom himself to the feeling of being in the air. This is quite one-third of the battle, and it is for this reason that observers and balloonists, who have already overcome the strange sensation of being up aloft, learn the actual handling of the machine more quickly than the complete novice.

When Not Suited to the Work.

Under present conditions, it is a mere waste of time, both for the instructor and for the pupil, if the latter is not really keen on his work. If he decides, after five or six hours dual-control instruction in the air, that he is not suited to the work, or has not sufficient stamina to carry on with it and overcome any preliminary nervousness that may assert itself, he had far better have left it alone in the first place.

It must not be thought from these remarks that aviation is a difficult or dangerous pursuit. Although great prominence is given in the daily Press to accidents in the air, these occur very seldom when the total number of pupils under training and the number of hours flown daily are taken into consideration. Accidents are generally due to inexperience on the part of pupils in their early training, which is probably speeded up, increasing the risk in consequence, more than it would be if the call for pilots were not so urgent. Apart from these causes, air accidents are very few and far between.


An aeroplane is a very simple type of machine compared with a motorcar, for instance. There are far fewer parts to go wrong. There is practically no transmission to give trouble, no gearbox, clutch or differential to break or require daily attention. The tyre problem on the aeroplane hardly exists. A dozen

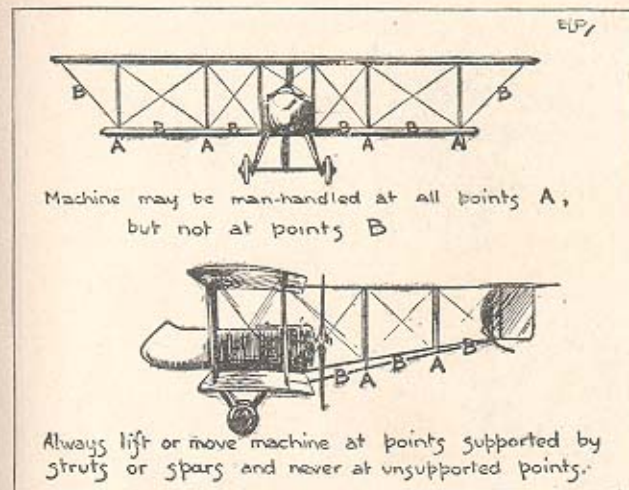

Ground training. Where and where not to man-handle an aeroplane. Always lift under struts and spars, and not under unsupported lengths. Never lift or push by holding on to the leading or trailing edge of a wing.

control wires, generally duplicated, are the only vital parts of the machine where failure might mean an accident. Compare them with the hundreds of parts in a motorcar which may go wrong, and some idea of the safety of the flying machine, from the mechanical point of view, can be obtained. Again, motorcar accidents are often due to the carelessness of the drivers themselves: collisions on blind corners or at cross-roads, sideslips and skids on tramlines may be quoted as familiar examples. In the air there is unlimited space for machines. They are not confined to certain narrow tracks, and hence accidents are scarce where trained pilots on standard designs of machines are concerned.

Where accidents do occur generally is in getting off or in landing; but the risks attaching thereto can be practically eliminated by care on the part of the pilot. Modern flying—except that under war conditions—has

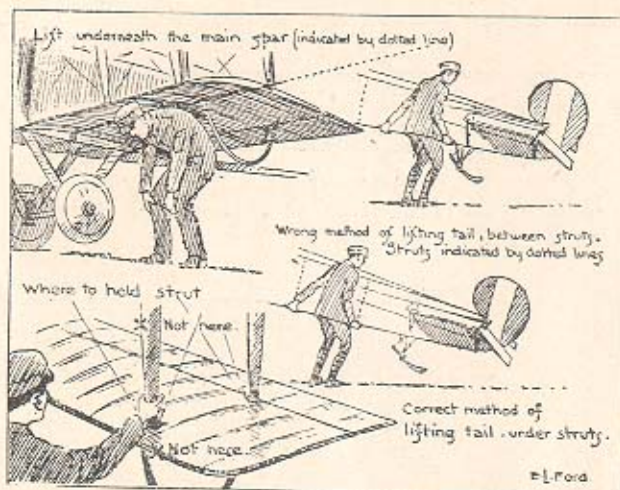

The proper way to lift the wings and tail of an aeroplane.

arrived at a point where it has already been considered as a rival to other methods of travel, and it is probable that, in the near future, it will compete successfully with the motorcar or mail train over long distances, hence the wonderful opportunity for the younger generation to take up this new science and to be ready to make use of the opportunities it will offer when the war comes to an end.

Physical Requirements.


To return to the case of the prospective pilot. It is generally admitted that he must be as physically fit as possible. His sight should be perfect, and although there are cases of pilots with half normal vision, necessitating the use of spectacles, there is the ever-present danger of the glasses breaking or becoming dimmed with oil or rain, and a consequent danger in landing.

Sound heart and lungs are the next most important points. A war pilot may be required to stay for several hours at heights varying from 15,000 ft. to 20,000 ft.,

and unless he is in the best possible health he will be unable to do this. Of course, under peace conditions the requirements would not be so strenuous, the average height for commercial flying probably being approximately 4000 ft. or 5000 ft.

A Preliminary Study of Aviation.

All Service pilots have to pass a fairly stiff medical examination, so that there is not much chance of the physically unfit becoming aviators. Once through the medical examination, the prospective pilot is drafted away to a flying school, where, probably, he will have his first close view of an aeroplane. He may spend several weeks on the ground before making his initial dual-controlled ascent. This time can be employed to great advantage by a close study of the machine and by learning from the mistakes committed by pupils in a more advanced stage of training. A keen pupil will spend as much time as possible in studying aviation

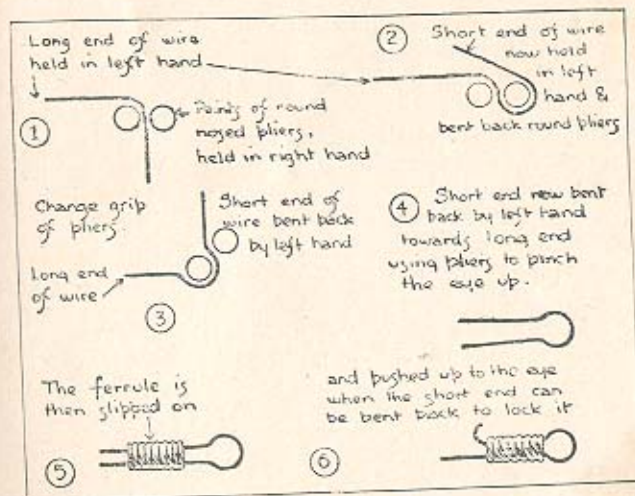

How to make loops in piano wire for attaching to the turn-buckles, etc. The top points of the round-nosed pliers used for this operation only are shown.

handbooks and such literature dealing with the subject which may come his way from time to time. He should also do as much practical work on the machines as he can. It is always better for him to do the work himself than to watch it being done by others. For instance, a pupil will learn more in an afternoon by helping to dismantle a machine after a crash than he would have done by watching for several weeks the mechanics effecting minor adjustments to a machine in the shed.

Preparatory Ground Training.

The following is a summary of the various points which should be studied in a preliminary ground training:—

- (1) The pupil should first of all make certain that he is physically fit enough to fly, and that he is sufficiently keen and interested in aviation to be able to overcome any preliminary nervousness or difficulties that may be experienced in the early stages, otherwise he will be simply wasting his own and his instructor's time.
- (2) During the pre-air work period of instruction the pupil should familiarize himself with the mechanical details of the machine on which he is going to be taught. He should then find out how the controls, levers, taps, switches and instruments work, and what is the proper speed to fly, glide and climb the machine and to run the engine.
- (3) He should be able to do a certain amount of practical work on the machine, i.e., change plugs, start up the propeller, splice wire, make loops and eyes, etc. He should learn how to man-handle an aeroplane, at what points he can lift and move it, and those where it is undesirable to exert force.
- (4) He should study as much aviation literature as he can obtain, and learn, at any rate, the rudiments of mechanical flight, the construction of aeroplanes, and the principles on which the petrol engine works. The last is most important.

CHAPTER II.

The Theory and Practice of Flight.

IT is necessary for the pupil to understand why an aeroplane flies, and thoroughly to master the objects and uses of the various controls.

Why an Aeroplane Flies.

At first glance, it is not easy to see why an aeroplane flies. The pupil may have watched a machine run along the field for some distance and then gradually leave the ground. He has seen no lever move. Indeed, if he had been in the machine, it is doubtful if he would have detected any movement of the controls, and yet the machine, which was running along the ground a second or two before, is now in the air and, apparently, climbing quickly. An aeroplane flies because the propeller, driven by the engine, forces the planes, which are set at a small angle to the air, through the air at high speed, and a lifting action is thereby set up. Naturally, if the lifting action, depending on the speed at which the machine is forced through the air, is not great enough to lift the weight of the machine, the aeroplane will continue to run along the ground. Once sufficient speed has been attained, however, it will rise in the air, if the elevator is in the correct position.

It must always be remembered that it is the relative speed between the aeroplane and the air that assists the machine in flight. Ground speed is only identical with air speed when there is no wind: thus, if a machine were flying against a wind of 20 m.p.h., and the necessary difference of speed between the machine and air, in order to maintain the aeroplane in flight, were 50 m.p.h., the speed of the machine over the ground would only be 30 m.p.h. If, however, the machine were to


turn down wind, its ground speed would increase to 70 m.p.h. to reach its flying speed of 50 m.p.h., which always remains constant within certain limits. Many pupils find it very difficult to realize that their speed through the air is independent of the speed of the wind, although their speed over the ground is very greatly influenced by the speed of the wind, which may be adverse or favouring. For this reason it is possible for a machine to remain stationary over the ground if it be flying against a very strong wind, in which case the speed of the wind and the flying speed of the machine would be identical.

An Explanation of the Controls.

The object now should be to discover how the machine is controlled. If the pupil inspects the pilot's seat, or, better still, sits in the machine on which he is shortly going to be taught to fly, he will find projecting from the floorboards between his knees a vertical control column, generally known as the "joy stick." His feet will be touching the rudder bar, and by working the stick and bar, and by observing the effect they have on the controlling surfaces of the machine, he can gain an excellent idea as to how the aeroplane can be made to climb or descend, turn, and fly in any desired direction.

The Rudder Bar.

Consider the rudder bar first. This probably is a metal-lined piece of wood pivoted about its centre, so that the pilot's feet can swing it backwards and forwards round that centre. It is set athwartships, and at each end are control wires, sometimes duplicated, which connect the rudder bar with the ruddering surfaces of the machine. The rudder is situated at the stern, and consists of one or more vertical surfaces set parallel with the fore-and-aft line of the machine. Controlling wires are adjusted to such a length that when the rudder bar is dead athwartships the controlling surfaces are perfectly parallel with the fore-and-

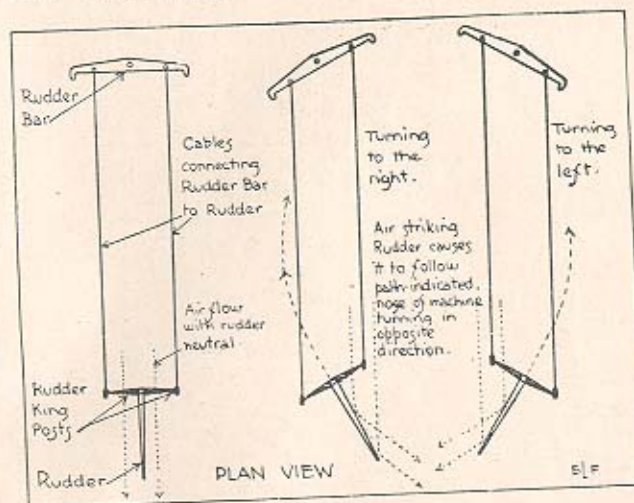

The effect of ruddering.

aft line. With the rudder bar square, the machine will fly straight; but when the right side is pushed forward it pulls the controlling surfaces to the right from its point of attachment (see sketch), and so opposes more surface to the wind on that side, which causes resistance and forces the tail of the machine round in the opposite direction, i.e., to the left. If the tail goes round to the left, the fore part of the machine will turn to the right, so that, to cause the machine to turn to the right, all that one does is to press the right foot forward on the rudder. The reverse is the case when it is desired to turn the machine to the left.


The "Joy Stick."

To make a correct turn, however, it is necessary to do more than press the rudder. The vertical control column, which has already been mentioned, is now called into operation, and must also be moved in the desired direction. This control column is pivoted about three-quarters of the way down and can be moved backwards, or forwards, or sideways from this point.

It is used to control the elevator and ailerons of the machine.

The Elevator.

The elevator, like the rudder, is situated at the back of the machine, except in certain old-fashioned types, where a front elevator is fitted. The elevator is

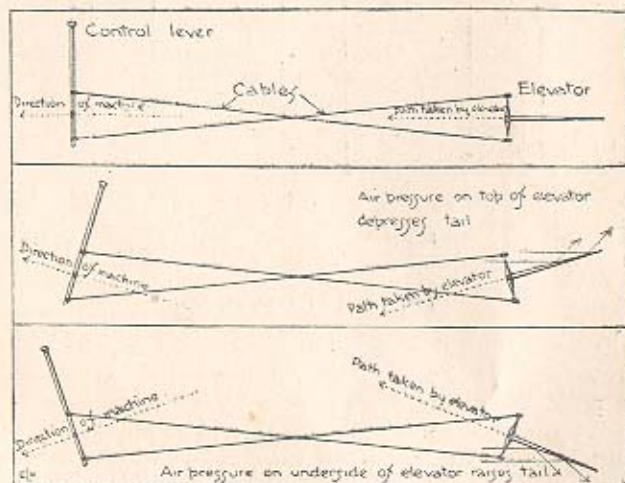

The elevator. The effect of the fore and aft movement of the control lever on the elevator and the machine as a whole. The control is pulled back to make the machine climb, and pushed forward to make it descend. The centre position the machine flies level when the engine is running.

a horizontal controlling surface, or flap, set parallel with the main planes, and capable of being worked upwards or downwards from its hinged or pivoting forward point. It is connected to the "joy stick" or control column by wires (generally duplicated for safety's sake), the wires being arranged above and below the pivoting point of the control lever, so that when the lever is pushed forward the elevator surface moves down from its forward hinged end, presenting more surface to the air, causing a resistance which

sends the tail of the machine up and the nose of the machine down. It will be seen from this that, to make the machine descend, the control lever must be pushed forward, and to make it climb it must be eased back. In the latter case the elevator surface will be raised above its neutral line, so that it presents its top surface to the air; the resistance encountered then sends the tail of the machine down and the nose up, and the machine is now ascending.

When the elevator is neutral, the control wires being connected to the joy stick, the latter must also be set in the neutral or vertical position. Where the control wires are connected directly between the control column and the elevator, it will be obvious that, to ensure the correct control, the wires must be crossed before being connected to the elevator, i.e., the wires from above the pivoting point of the control column lead to the underside of the elevator and vice versa. (See sketch.)

All the movements of the control lever are natural ones, i.e., to make the machine descend the lever is pushed forward; to climb, it is pulled backward; and to turn to the right or left, it is moved in those directions.

How "Stalling" is Caused.

The attitude of the machine in the air is controlled by the elevator, as already explained. When the machine is set to fly at an increased angle the resistance of the wings is greater, the angle of attack having been increased so that the speed decreases and the machine climbs. When the machine is set by the elevator to fly downwards slightly, the resistance set up by the wings attacking the air is decreased and the machine increases its speed; so that, if a pilot knows at what air speed his machine flies level at a given number of engine revolutions per minute, he knows that any increase in the air speed must mean that he is flying downwards, and that any decrease indicates that he is climbing. If he allows the air speed of the machine to drop below the point where

sufficient air is dealt with by the planes in a given time to maintain the machine in flight—i.e., if he allows the machine to stall—he will lose control, and only regain it when the air speed has again been increased by diving to a point when the air dealt with in a given time is sufficient to maintain the machine in flight. Before stalling, he will notice a general sloppiness in the controls, indicating the fact that an insufficient amount of air is passing the planes and their controlling surfaces in a given time to have the desired effect on the ailerons, elevator and rudder. He should then immediately put the nose of his machine down to increase the air speed and so regain control.


Banking and Turning.

It is now necessary to explain that the control lever as well as the rudder bar must be moved in the proper direction in order to make a turn. If the rudder only were operated the machine would be inclined to skid its corner, as it were and, later on, the nose would go down. It would slip outwards on its turn and would lose speed. To make a gentle turn in the air the rudder must be applied, together with the correct amount of bank, in the following way:—To make a gentle right-hand turn the right rudder is pressed forward and the control lever is moved to the right at the same time; to come off a gentle turn the control lever is moved across in the opposite direction, past the central position—that is, to the left—and as the machine approaches the horizontal again a slight amount of left rudder may be given. Both controls are then centred. What happens when an acute turn is made will be discussed later in the chapter dealing with dual-control instruction.

The Ailerons.

The pupil can now trace out the wires that connect the control column with the ailerons, or controlling flaps, fitted to each wing. In some machines there is an aileron, or controlling surface, to each of the four

wings. In others, only the top wings are so fitted. The principle on which the ailerons operate is just the same as in the case of the other controlling surfaces, i.e., the rudder or elevator. When the control lever is moved to the right in order to make the machine turn to the right—that is, the right-hand side of the machine will be down and the left up—the controlling surface fitted to the left wing or wings, as the case may be, is pulled down. The amount is very slight: the trailing edge of the aileron may be, perhaps, half an inch below the trailing edge of the wing, but the additional resistance set up by the extra surface exposed to the air causes that wing to rise, while the reverse is the case with the right-hand wing, the aileron of which is connected by a balancing wire to the other aileron,

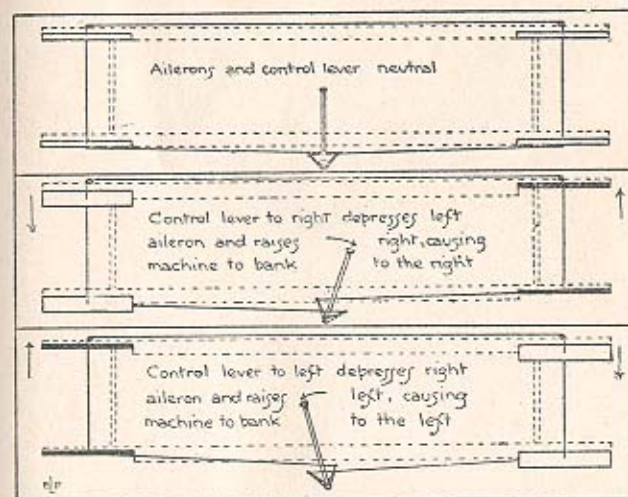

The ailerons. The sideways movement of the control lever when it is pressed to the right makes the left aileron go down and the right aileron come up, which causes the machine to fly right wing down. To make the machine fly left wing down the control lever is moved to the left. The sideways movement of the control lever is used in banking the machine for turns and in correcting air bumps, which cause a wing to rise or drop.

and is arranged so that, when the latter is drawn down, it is slightly raised, thus helping the right-hand wing to become depressed owing to the added resistance on the top surface of its aileron, which is now raised slightly beyond its neutral position. On some machines the wings themselves are made to move or warp. The control is just the same as on the more modern type fitted with ailerons.


The Engine Control.

Having mastered the details of the control of the machine, the pupil can next proceed to discover how the engine is controlled. If the engine is a stationary type, as opposed to the rotary, he will find his throttle lever and petrol tap not much different from those used on motorcars. He will also find the ignition switch, which should have its "off" and "on" positions clearly marked. In addition, there may be various pumps, the purpose of one of which will be to maintain air pressure in the petrol tank, where the fuel is not gravity fed. The pupil should find out which way all the taps and levers open and shut, and what are their functions and use. He should study the array of strange-looking clock-faced instruments and gauges which he will find on the instrument board in front of him as he sits in the pilot's seat. He will notice the air speed indicator, which gives him his speed through the air and not over the ground, except in cases where there is no wind; and also his height indicator, which may be graduated in hundreds and thousands of feet. The engine revolution counter may be driven direct off the engine shaft, in which case it will give him the number of revolutions per minute of the engine itself, or off the camshaft, in which case it gives only half the number of revolutions per minute performed by the engine. Petrol and oil gauges present no novelty to the man who has some motoring experience; but a compass and sideslip indicator may puzzle the pupil to begin with. When the instruments have been inspected and their operation explained and understood,

the pupil should find out at what speeds, by instruments, the machine flies level, glides, and climbs; at what number of revolutions per minute it is safe to run the engine; how many gallons of petrol and oil the tanks hold; how much petrol and oil the machine consumes per hour, and, consequently, how long it can remain in the air without replenishment.

Study the Engine.

Next he should turn his attention to the study of the engine. If it is one of the stationary type, it may follow motorcar practice. The cylinders may be set

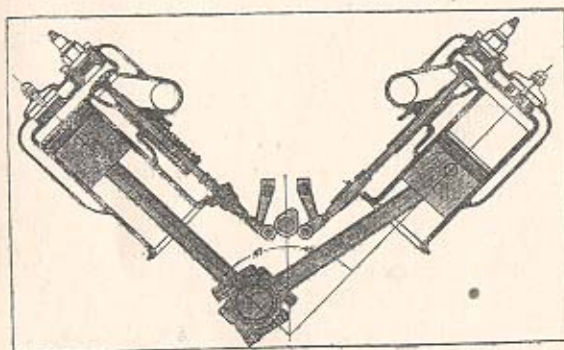


General arrangement of an eight-cylindered engine, showing two cylinders at 90 degrees, with central camshaft.

V fashion, with four pairs of Vs in line, as on the Maurice Farman elementary training machine, or it may be a fixed engine, with the cylinders set radially round the crankshaft, as on the Anzani-Caudron. If a pupil is being taught to fly on a more highly-developed and complicated engine, such as the Gnome, Clerget, or Le Rhone, he must study it with the greatest care, and make certain that he understands how to operate the throttle and fine adjustment levers without choking the engine. The stationary type of engine possesses ignition, carburetter and valve gear very similar to those employed in motorcar practice.


If he does not possess any knowledge of the principle on which the petrol engine works, he had better at once obtain a reliable handbook on the subject, such as the "Motor Manual," and commence a study of it without delay, for the more he knows about his engine the more valuable will he be to himself and his comrades in after days.

Principles of Aeroplane Construction.

A preliminary study of the machine should include a comprehension of the principles on which it is built and rigged. The pupil will find that the wings, which carry the weight of the machine, consist of main spars and ribs braced together by piano wire. Over the whole is stretched fabric, which is held in place on the ribs by stitching and copper rivets. The fabric is then doped by a special process to preserve it from the weather and to tighten it up. Between the wings, in the case of a biplane, are the inter-plane struts, set vertically. The whole is then braced together in cellule form by wires tautened by turnbuckles. The weight of the engine, passengers and body of the machine in the air is taken by what are called the flying wires, which run diagonally from the top plane inwards and downwards to the fuselage. The wires leading from the top plane outwards and downwards to the fuselage are called landing wires, because they take the weight of the machine when it is on the ground. In some machines, the upper and lower planes are assembled in one length, in which case the fuselage, or nacelle, is bolted to the centre section struts and rests on the centre of the lower plane. On others, the wings are divided into right and left-hand pairs—upper and lower—always taking "right" and "left" as referring to the machine when seen from the pilot's seat, and are bolted up to the fuselage and centre section. The fuselage of the machine is a long, thinly tapered and generally more or less rectangular box. At its forward end it accommodates the engine, whilst the lower wings are secured to it at each side by bolts pass-

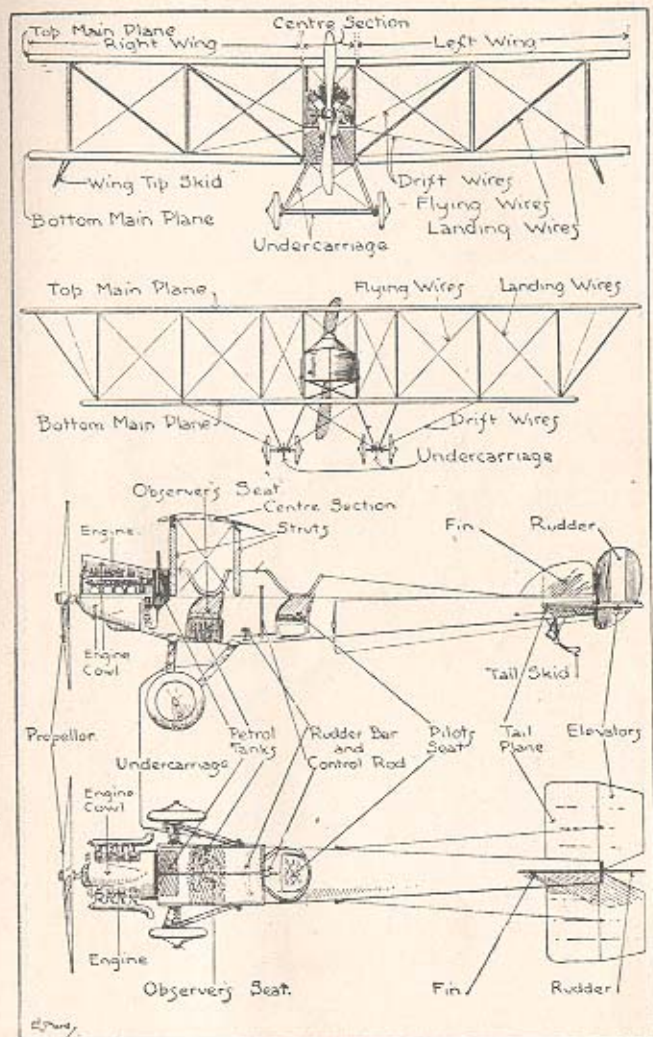

Top: Machine, front view, composed of right and left-hand planes bolted to the centre section. Bottom: Top and bottom planes as one unit. A typical fuselage in elevation and plan view.

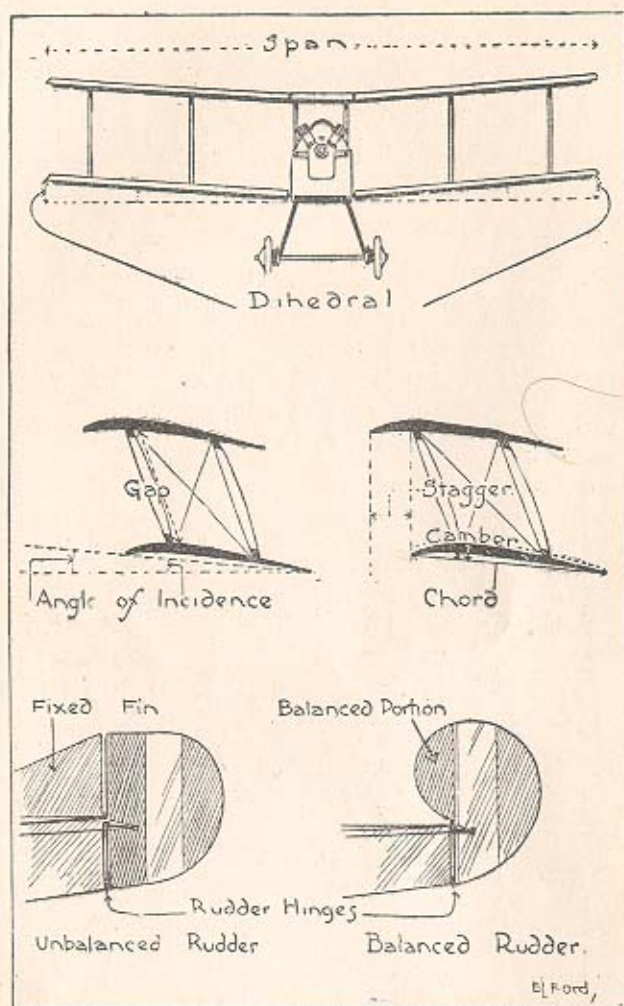


The three top sketches illustrate common aeroplane dimensions, and the lower two the difference between a balanced and unbalanced rudder. The pupil should familiarize himself with common aeroplane terms and their meaning as early as possible.

ing through their front and rear spars. The passenger's seat is generally found immediately behind the engine, and behind it in turn comes the pilot's seat.

Arrangement of Tanks and Seats.

The passenger's seat has four vertical struts rising from the fuselage round it, and above it is the centre section plane roughly corresponding with the width of the fuselage. To it are attached the upper planes, right and left. From this it will be seen that the engine is carried in front of the planes, the passenger's seat directly under the centre section of the top plane, and the pilot's seat slightly to the rear. The fuselage is tapered off to the rear, where the fixed tail plane, elevator flap, vertical stabilizing fin (if fitted) and rudder are accommodated. The petrol and oil tanks are found in the forward end of the fuselage, generally just behind and slightly above the engine, although, in some cases, a pressure-fed tank is fitted under the passenger's or pilot's seat. Generally speaking, however, the aim of the designer is to centre all the weight as much as possible, so as to secure ease of manœuvring. The whole of the weight of the machine on the ground is supported by the under chassis, or undercarriage, fitted under the fuselage and mid-way between the main planes. The undercarriage is attached to the wheels and axle of the machine, through the medium of some form of shock absorber, such as the Sandow elastic, so as to decrease the shock of landing, or "taxying" over rough ground, as much as possible. A tail skid fitted at the rear of the machine serves the same purpose in relation to the tail, which would otherwise drag along the ground until flying speed was obtained and might seriously strain both itself and the rear part of the fuselage.

Further practical knowledge may be gained by the pupil if he is able to spend some time in the erecting and engine shops. He will learn how to cover a plane with fabric, how to dope it, how to true up a machine that is nose or tail heavy, or flying with one wing down. Simple work, such as wire splicing, making loops and

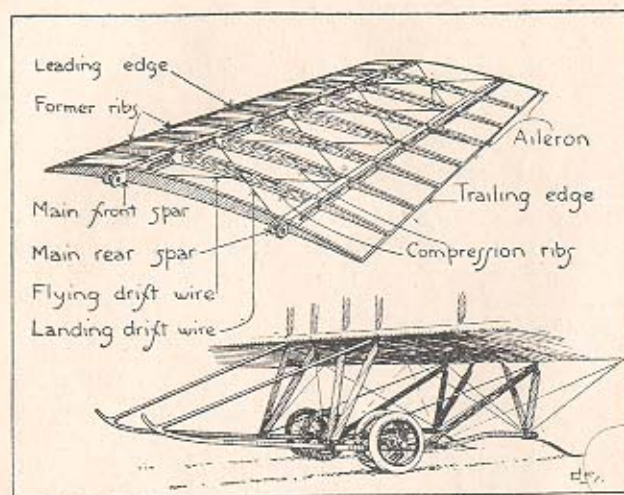

Principles of aeroplane construction. Constructional details of an aeroplane. Top: What a wing looks like when the fabric is removed. Bottom: A typical undercarriage with double pairs of landing wheels and arrangement of skids.

eyes in piano wires, and the correct method of fitting Sandow shock absorbers to the landing wheels, is all easily learnt, and will certainly be of great value to the potential aviator at some period of his career. At the same time it is quite possible to become a first-rate pilot without a great deal of technical knowledge, just as many people can drive cars or motorcycles well without knowing much about their working. Other things being equal, however, the man who knows most about the practical and mechanical side of his machine and engine will be more valuable than the man who knows little or nothing.

CHAPTER III.

Elementary Principles of Aeroplane Engines.

IN school flying, one of the principal troubles to be guarded against is engine failure. Not that this is so frequent as it was in the early days, for aeroplane engines are very much more reliable now and are very much better understood, but the necessity for studying the engine and its peculiarities and of obtaining a good working knowledge of it cannot be too strongly impressed upon the pupil. It may save quite a lot of trouble and very possibly some forced landings.

While learning to fly, the pupil should take a personal interest in the engines and machines he has to handle, and if at any time any trouble is experienced with an engine similar to his he should endeavour to find out the reason and the remedy. He should acquire such practical knowledge as whether it is safe or advisable to continue flying with one or two cylinders misfiring; what black smoke belching out of the exhaust pipe signifies; why certain machines are difficult to start up in cold weather, and how this failing can be remedied; how much petrol and oil the tanks hold, and how much fuel the machine uses per hour; and the causes and cures for the hundred and one little troubles that will crop up from time to time during his course at the flying school.

The Four-stroke Principle.

Practically all aeroplane engines, as in motorear practice, work on what is known as the four-stroke principle. Any handbook on the petrol engine, such as the "Motor Manual," explains this detail, but a rough outline of the working of a four-cycle engine may be given. Imagine a cast-iron jar turned upside down with a close fitting, but shorter, iron jar, also inverted


free to slide inside it. Fixed to the inside of the inner jar is a rod, which is enlarged and hollowed out at its lower end so as to fit over a crank. Carrying the simile still farther, at the top of the larger jar are two doors which can be opened and closed by a suitable mechanism at the desired moment, from which lead two pipes, one to the carburetter or device in which the petrol and air are mixed in the desired proportions so as to form an explosive mixture, and the other to the silencer, or exhaust expansion chamber, from which the burnt gases can issue into the air. The door, or valve, to which the carburetter pipe leads, is called the inlet valve, and the door, or valve, opening into the exhaust pipe, is called the exhaust valve.

Engine Parts.

There is also a machine called the magneto, capable of supplying an electric spark at the correct moment in the space between the top of the shorter jar and the under side of the top of the largest jar. This space is generally known as the combustion chamber, while the larger jar represents the cylinder and the inner and smaller one the piston. The rod from the piston to the driving shaft is called the connecting rod, and the shaft is, of course, the crankshaft, to one end of which the propeller itself can be fitted. Both the valves are opened at the correct moment by a system of gear wheels, driven off the crankshaft and cams, which lift the tappet rods and rocker arms in contact with the valve stems, but they are closed by springs, called the exhaust valve spring, in the case of the exhaust valve, and the inlet valve spring, in the case of the inlet valve. The magneto is also driven by the engine, and sends an electric current along a rubber insulated wire to the sparking plug, which is screwed into the combustion chamber with its sparking points inside, and its insulated terminal, to which is attached the cable from the magneto, on the outside of the cylinder.

The cycle of operations is divided into four strokes of the piston. The first is the suction stroke, with a down-

ward movement of the piston; the second is the compression stroke, with an upward movement of the piston; the third is the explosion or power stroke, with a downward movement; and the fourth is the exhaust stroke, with an upward movement of the piston again. After the four strokes have taken place, the series starts again, and as each up and down stroke of the piston represents one revolution of the crankshaft,

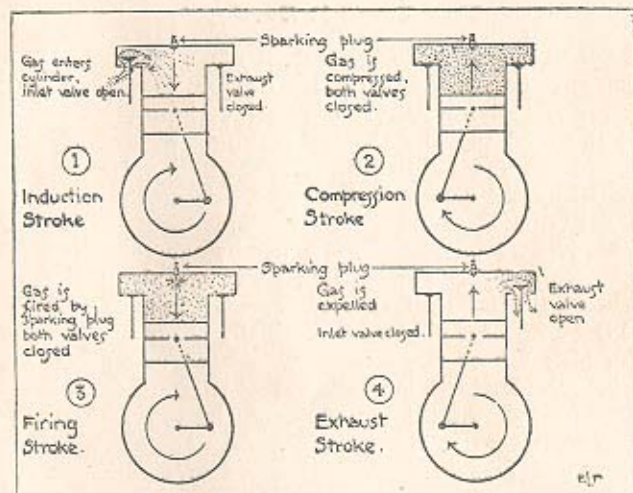

Diagrammatical illustration of the principle of the four-stroke engine, showing the cycle of operation.

which may be doing from 1200 to 2000 revolutions per minute, it can easily be understood that the strokes follow each other with extraordinary rapidity. It will also be noted that only one stroke in four is a power stroke, and therefore the engine has only one power stroke to every two revolutions of the crankshaft. Thus, if the engine were running at 1200 revs. per minute (usually expressed as r.p.m.), it would mean that only 600 power strokes, or explosions, were taking place every minute.

Having grasped the cycle of operations, the pupil must next familiarize himself with the working of an engine in greater detail. The piston in the course of its movements up and down inside the cylinder never reaches the closed top of the cylinder; there is always a small space, called the combustion space, left between the top of the piston at the upward limit of its travel and the under side of the top of the cylinder.

How Power is Developed.

When the piston descends on the first stroke the inlet valve opens and the explosive mixture is sucked into the combustion chamber from the carburetter by way of the inlet pipe by the displacement caused by the downward travel of the piston. The inlet valve is then closed by the action of its spring, and as the exhaust valve remains closed during the first three strokes of the cycle of operations, the combustion chamber is sealed gas tight. The piston then ascends and compresses the mixture already received into one-fourth or one-fifth of the space it originally occupied. When the piston is at the top of the second (compression) stroke the magneto is so timed that it sends an electric current along the rubber insulated wire to the sparking plug points inside the cylinder, when the spark takes place and fires or explodes the compressed mixture. This explosion drives the piston down on its third, or power, stroke and imparts energy via the connecting rod to the crankshaft of the engine. On the last stroke of the cycle of four the exhaust valve opens and the piston in its upward course drives the burnt and used gases before it, past the exhaust valve into the expansion chamber and exhaust pipe. When the piston has reached the top of its travel it has driven out most of the used gases. The exhaust valve closes and the cycle of operations commences again, with a downward travel of the piston and the opening of the inlet valve. In passing it may be noted that a gas-tight joint is made between the piston and the inner walls of the cylinder by means of piston rings, which fit in grooves in the


piston and tend to spring out against the walls of the cylinder.

Valve Systems of Aviation Engines.

This cycle of operations is common to the great majority of aviation school engines, among them being the Renault eight-cylinder air-cooled, the Curtiss, and the R.A.F. A slightly different system is employed in some rotary engines, notably the Gnome and the Monosoupape.

In the Gnome engine the mixture is taken into the crankcase, and enters the combustion chamber by means of a valve in the head of the piston. This valve is worked automatically, and so does not need a system of timing gears, cams, tappets and rocker arms to operate it. The valve is caused to open by the suction in the combustion chamber on the intake stroke, and a spring returns it to its seating when the piston ascends again to compress the mixture. The exhaust valve is operated in the ordinary manner and is carried in the head of the cylinder. See sketch of this valve arrangement on page 28.

The Monosoupape, or single valve, engine works on the four-stroke principle, but only employs one valve, which is carried in the cylinder head as in the Gnome. This valve is open to the air, and on the inlet stroke allows air only to enter the cylinder. It closes, however, some time before the piston reaches the bottom of its travel, or stroke, so that suction is set up inside the cylinder while the piston is still descending. There are passages connecting the crankcase and the combustion chamber, and as a very rich mixture has already been prepared in the crankcase it rushes into the combustion chamber, owing to the suction already present there, as soon as the piston uncovers the passage ports on its downward path. The upward stroke of the piston compresses the mixture of pure air from outside the engine and very rich mixture from the crankcase in the ordinary manner, and, as in the previous example, the third stroke, i.e., a downward

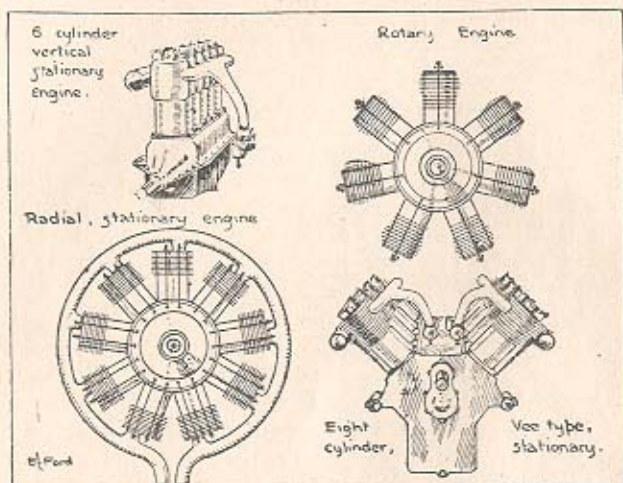

Four types of aeroplane engines.

movement of the piston, provides the power as the mixture is fired at the top of the stroke. On the fourth stroke, the valve opens again and allows burnt and used gases to pass out into the air; then the cycle commences once more, the valve remaining open, as already explained, to allow pure air to enter the engine during the first half of the downward inlet stroke.

One Principle, Many Types.

From this very elementary description of the principles on which the petrol engine works the pupil may have some difficulty in recognizing the various parts when confronted with a modern aeroplane engine. He will find, however, that if he has a sound idea of the fundamental principles of the working of a single-cylinder motorcycle engine, and if he can take it to bits and put it together again he will soon pick up the peculiarities of the more complicated aviation engine. Perhaps the arrangement of the cylinders on the crankcase may strike him as unusual, or it may be that the position of the valves or methods of driving the cam-

shaft puzzle him. But familiarity with the first principles will soon show how they work.

Aeroplane engines may be classified as follow:—


Stationary Engines.

- | | |
|--|--|
| Cylinders arranged in line vertically as in motor-car. | Example:—160 h.p. Beardmore, six-cylinder, vertical. |
| Cylinders arranged in V formation. | Example:—80 h.p. Renault or 90 h.p. R.A.F., eight cylinders in two sets of four, set in the form of a V. |
| Cylinders arranged radially. | Example:—100 h.p. Anzani, cylinders set radially round the crankshaft. |

Rotary Engines.

- | | |
|--|---|
| The cylinders rotate round a fixed crankshaft. | Example:—80 h.p. Gnome; 80 h.p. Le Rhone; 100 h.p. Monosoupape, 110 h.p. Clerget. |
|--|---|

The arrangement of the valves in these engines varies. The commonest practice is to fit the overhead type; on the 80 h.p. Renault and the 90 h.p. R.A.F. the exhaust valves are of the overhead type and the inlet valves are placed under them. The camshaft is carried between the cylinders at the bottom of the V and lifts the valves by tappets. On the Curtiss, both valves are overhead; on the Gnome, the inlet valve is, as already described, situated in the piston, and is of the automatic, or atmospheric, type. The exhaust valve is carried in the cylinder head, and is driven by cams and tappet rods. On the Monosoupape, the overhead valve serves both as exhaust and air intake valve. On the Le Rhone and Clerget engines, both inlet and exhaust valves are carried in the cylinder head, and

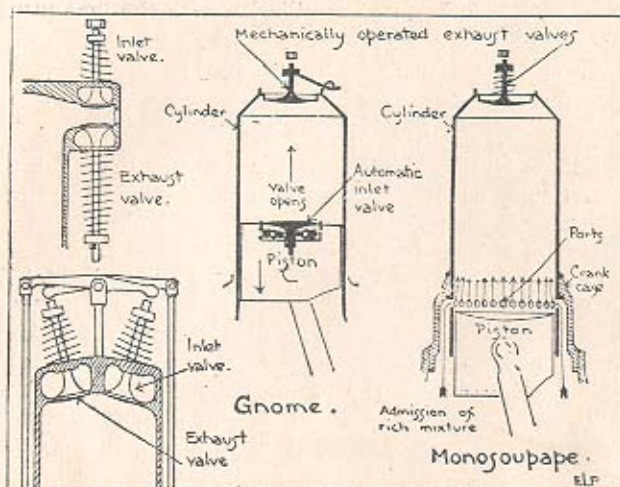

Arrangement of inlet and exhaust valves on aeroengine. Top left: The super-imposed arrangement. Bottom left: Overhead inlet and exhaust. Centre: Gnome pattern inlet in piston, and overhead exhaust. Right: Monosoupape or single-valve engine.

are operated by means of tappets. Some different valve arrangements are illustrated.


Generally speaking, the rotary engine is lighter per pound per horse-power than the stationary type. Rotary engines are all air cooled, whilst only the smaller stationary engines follow this practice. On the other hand, the rotary engine is often more extravagant in petrol and oil consumption than the stationary type, and this has to be considered in weighing up the relative advantages and failings of each type. Generally speaking, rotary engines are used on most small and light machines, such as scouts, which are single-seaters. On passenger-carrying machines, used for long-distance work, a stationary engine, generally water cooled, is used on account of its reliability and economy.

It can now be assumed that the pupil has at any rate an elementary knowledge of the principles on which the engine works, and he desires to pick up as

much practical knowledge about it as he can in the few weeks he has at his disposal.

Parts that Give Trouble.


Whenever an engine fails or is being taken down for repair the pupil should find out what has happened to it and what is being done to remedy it. The parts of an engine most liable to give trouble (excluding serious mechanical breakdown) are the sparking plugs, the ignition wiring, valves and valve springs, the magneto, the carburetter, the petrol pipe, the inlet pipe, piston rings, obturator rings (where fitted), and the lubrication system. By taking these parts one by one and discussing the symptoms, causes and cures of the troubles, the pupil may learn the kind of breakdown to expect, and will see how, by a little care on his part, with an occasional inspection of the machine, he can prevent many of these failures.

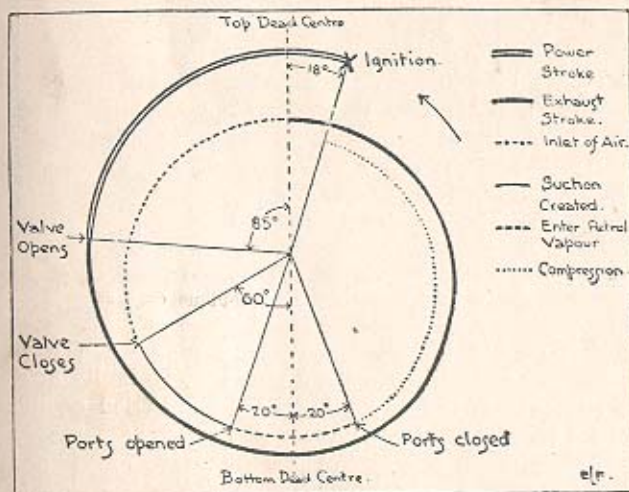

Monosoupape engine timing. Timing diagram of the Monosoupape engine, showing how the single valve acts as air inlet and exhaust. The rich mixture is admitted from the crankcase by means of transfer ports in the cylinder walls.

Engine Troubles, Symptoms, Causes and Cures. The Plugs.

Spark plug points are somewhat apt to become sooted up with burnt carbon between the plug points, or with oil getting up into the body of the plug. In the latter case, the plug points may appear clean and yet the plug may be faulty. When in doubt, change the plug, and if the cylinder then commences to fire the plug has obviously been the cause of the trouble. A new

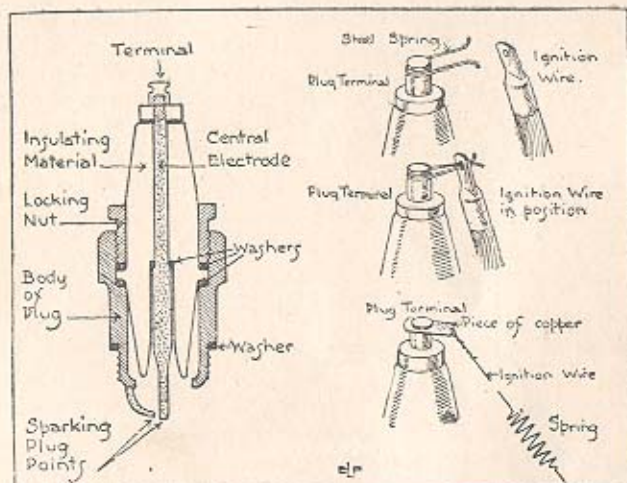

A sparking plug in section and two types of spring on plug terminals in common use on aeroplane engines.


washer should be fitted with each plug when it is changed. Sometimes a clean plug may be faulty also, so that unless the two plugs have been tried do not take it for granted that the trouble is elsewhere. Plugs are sometimes capable of being taken apart and cleaned with a stiff brush and petrol. The points should be cleaned and set the correct distance apart, which is approximately 1-50th of an inch. Sometimes, owing to quick changes of temperature, water will form on the plug points and cause misfiring. Sometimes

PLUG TERMINALS

the insulation of the plug will be found to have cracked owing to excessive heat, in which case cleaning is useless and the plug must be scrapped. Misfiring may occur owing to the plug terminal dropping off through being badly secured. Spring terminals, if reliable, are the best, as otherwise a great deal of time is wasted in changing plugs. Mechanics should carry spare plugs and a plug spanner in their pockets for the same reason.

Quick-release Terminals.

Two types of spring terminal are illustrated (page 30). The first consists of a piece of bent wire fitted round the neck of the plug, with its two ends cranked and sprung slightly apart. The insulated wire from the magneto is fitted with a copper terminal with a hole in it through which the ends of the plug spring terminal are inserted by being pressed together. They then spring apart, and there is no chance of the insulated wire dropping off the plug, although it is only the work of a moment to pinch the terminal ends together and release them when desired. The second type of spring terminal incorporates the high-tension lead wire as well, and is used on engines such as the Gnome, Clerget and Monosoupape, where there is no need to employ a rubber insulated high-tension wire. A steel wire is used to convey the current from the distributor to the plugs, and incorporates a spring in its design. The sketch will explain the idea. To detach the wire it is only necessary to take hold of the loop at the end and strain the wire against the spring, thus relieving the pressure of the upper loop round the groove in the plug. If a plug constantly oils up at its points it may be found expedient to increase the gap between the points considerably. This, however, may make it difficult or impossible to start the engine on this cylinder, but it will be possible to start it on one of the others, and the cylinder in question will chip in when the engine is running. Moisture on the external insulation of a plug will also cause misfiring, which will cease if the plug is dried.

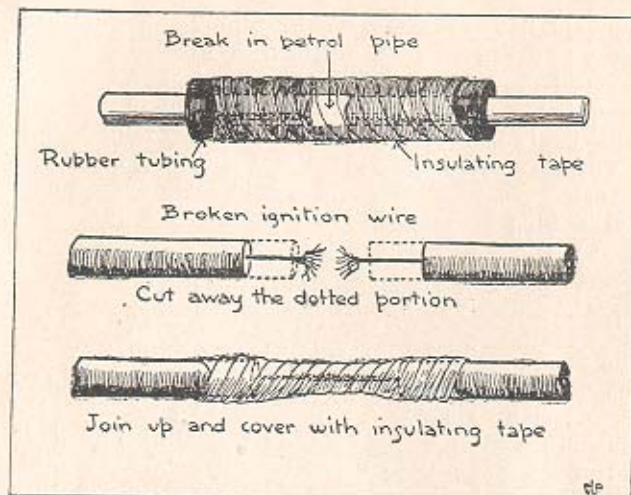

Repairs on the field. Top: How to repair a broken petrol pipe. Bottom: A repair to a broken or chafed high-tension wire effected by means of insulating tape.

High and Low Tension Wirings.


The ignition wiring does not give so much trouble as do the plugs, but it should be examined from time to time to see that it is not chafing against any rough parts of metal or wood. The insulation material is rubber, and this may easily perish if it is constantly subjected to oil or friction with some part of the machine. Wiring should be neatly clipped up in position by fibre clips, and should not lie in long unsupported lengths, as this strains it and may lead to breakage owing to vibration. The wiring is divided into two systems, the low tension, which requires a thinner insulation than the other, which is the high tension. The low-tension wiring runs from the low-tension terminal on the contact-breaker cover on the magneto to the switch, whilst the high-tension wiring runs from the magneto to the distributor, and from the high-tension terminals on the distributor of the magneto to the sparking plugs. The

TYPES OF SWITCHES

high-tension wiring is generally thicker than the low-tension. To repair a chafe in ignition wiring, black insulating tape, or ordinary medical tape, can be bound round the weak part. If the wiring breaks the insulation can be cut off so as to expose the wire core for a short distance. The two ends can then be twisted together and the whole joint bound with insulating tape. The reason that in some engines, notably the Gnome, the high-tension wiring is left free is because it is led direct from the magneto to the sparking plugs, and so touches nothing en route that would cause a short circuit. In this case the air acts as an insulator.

Switches.

The switches require to be continually looked after to see that they are working efficiently. The tumbler type, such as is used in electric lighting installations, is the most reliable. The spring button type fitted on the top of some control levers is liable to stick at times,

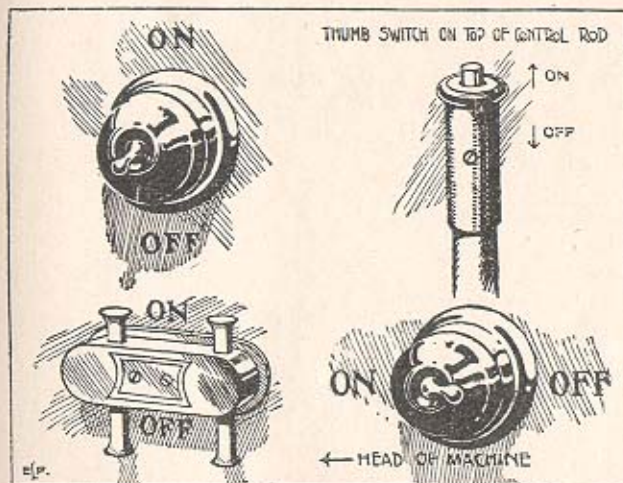

Types of switches. When the switch is "on" the pilot or mechanic calls out "contact"; in the "off" position the phrase used is "switch off."

and should not be depended upon, as the spring is often uncertain in action. In this type the switch has to be held down for "switch off," and springs on to "contact" when released. All switches are supposed to work in the same direction and to be marked for "contact" or "switch off," but this is not always the case, and the pupil should make certain that he clearly understands how the switch works. In the tumbler type the switch springs on to contact easily but requires rather more force to put it into the "off" position.


Valve Troubles.

Valves are subject to many different forms of trouble. Generally, it is the exhaust valve which fails and requires more attention, because it is subjected to much greater heat and strain than the inlet. When a valve breaks off at the head the pilot should switch off and land, as otherwise there is every chance of the valve head entering the combustion chamber and breaking up the engine. The symptoms in a broken valve are the sudden misfiring of one cylinder, probably accompanied by a sharp metallic knocking noise in the exhaust. The cure is to remove the broken parts and to fit a new valve. Valves should be changed periodically, and an examination made systematically will often ensure the removal of a valve that would break after a few more hours running. If the valve is burnt and cracked under the head it should be changed at once. Valves also warp, owing to the heat, which means that they do not bed down evenly on their seating. This makes it impossible to secure a gastight joint. The cure is to re-cut or re-grind the valve. Valve grinding is an art in itself, and the pupil should familiarize himself with the methods employed. The object of valve grinding is to make the valve rest evenly on its seat. When the valve has been properly ground-in and cleaned up there should be no black spots or rings on it or on its seating. Valve grinding is done by means of a screwdriver engaged with a groove in the head of the valve and a valve-grinding compound. A

spring is placed under the valve head so as to raise the valve from the seating from time to time, and it is bad practice to grind the valve without taking this precaution. As little of the grinding compound as possible should be used, as otherwise the seating will grind into the rings. Valves may also stretch, which fault can be watched for by noting the clearance between the stem and the rocker arm or tappet rod. Stretching is often a forerunner of the complete breakage of the valve, and is due to great heat or to the valve spring being too strong. Any squeaking that manifests itself in the valve guide or rocker arms shows that they are dry and that friction is taking place. The cure is generally to lubricate them or treat with graphite. If the valve stem is bent or distorted it will also bind in the guide. The cure is to fit a new valve, as straightening the old one is difficult and unsatisfactory. It is often difficult to fit new valve springs, which have to be compressed before they can be got into place, but if they are first of all compressed in a vice and tied up in position they can then be fitted quite easily.

Ignition Troubles.

The magneto is perhaps too complicated a piece of mechanism for the pupil to take to pieces and repair on the field, but a few simple breakdowns which can easily be remedied may be described. Some engines employ two magnetos, each firing half of the number of cylinders. If one magneto fails, the pilot can soon find out which it is by feeling which cylinders are cold and then tracing the high-tension wiring from the cold cylinders to the faulty magneto. To test for a faulty magneto, leave the switch on, put one cylinder in the firing position and rock the propeller gently to and fro. Feel the high-tension terminal of the plug, and if no shock is experienced it proves that the magneto is at fault. The greatest enemy to the efficient working of a magneto is oil and dirt. Therefore, very often, merely cleaning up the magneto will cure the trouble. The distributor should be free from oil (which it very seldom

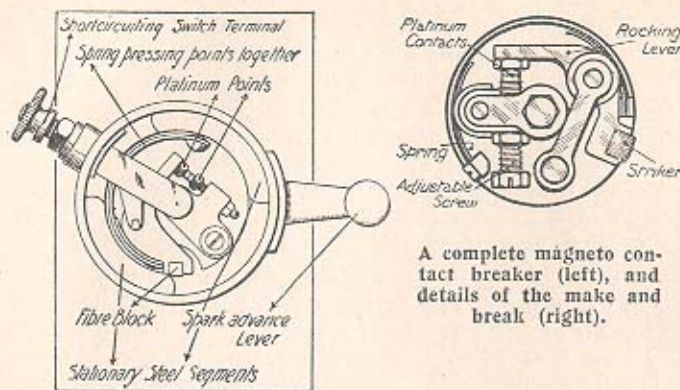


A complete magneto contact breaker (left), and details of the make and break (right).

is on rotary engines), the contact breaker should be clean, and the high-tension terminals and brushes should be cleansed carefully to get rid of any lubricant which has crept in. The brushes should work freely in their guides or holders, and their springs should be strong enough to ensure efficient working. Frequently, trouble is encountered in connection with the contact breaker. The platinum points may require cleaning, trimming and adjusting to their correct clearance or else, especially in damp weather, it may be found that the rocker arm, which operates against a cam and opens the points, has seized. The cure is to ease it in its bush and vaseline the metal pivot. This trouble may either cause total or partial misfiring, the latter being by far the more difficult to detect. Broken brushes cause total misfiring, while dirty distributors or contact breakers are frequently indicated by partial or intermittent misfiring or difficulty in starting. Sometimes, in damp weather, moisture condenses inside the magneto and causes partial and erratic firing. To cure this trouble, the magneto should be taken to pieces and the armature and magnets dried in a warm room. See that a bar of iron connects the two ends of the magneto, as they may lose their magnetism. Moisture on the high-tension terminals will also cause misfiring, which will disappear if the terminal is dried.

Failure in Petrol Supply.

Carburettor troubles are mostly experienced in connection with the jet, which every pupil should be able to remove. A jet key should be part of every pilot's tool kit, as it is often impossible to remove the jet with the ordinary type of spanner. Popping and uneven firing indicate partial restriction in the supply of petrol. This may take place at the jet, where the flow of petrol from tank to engine is naturally most restricted, in any of the small petrol passages of the carburettor, or in the petrol pipe, filter, or petrol tap itself. All kinds of dirt seem to find their way into the carburettor from time to time, and it is a mystery where they all come from. Cotton wool, grit, bits of rubber from petrol

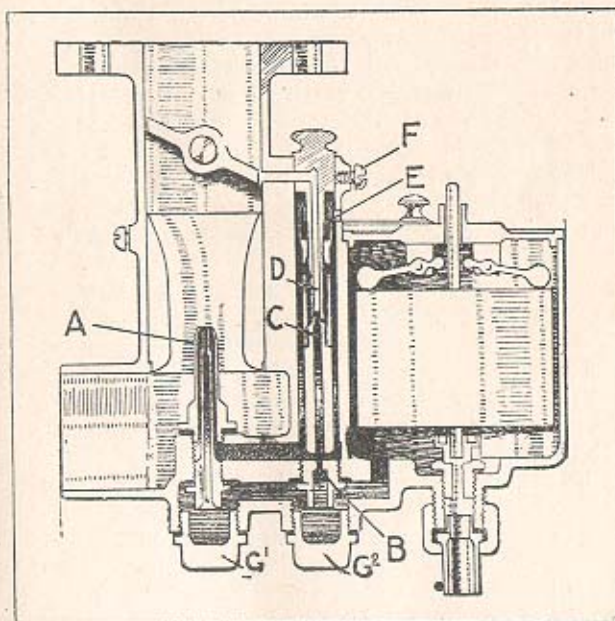

To illustrate carburettor design. (A) Main jet. (B) Compensating jet. (C and D) Slow-running jet and choke tube. (E) Air inlet. (F) Set screw holding compensator. (G¹ and G²) Screw caps below the two jets.

joints or composition piping, would all cause stoppage. If a failure of the petrol supply is suspected and the tanks are full, the first thing to do is to turn on the petrol and flood the carburetter. The petrol should then pour out; if it does not, the petrol union should be disconnected at the carburetter and the flow tested again. If it is good the fault is in the carburetter. If bad, the trouble lies in the pipe, filter or tap. Should the carburetter be assumed to be at fault, remove the jet, see that it is clean and blow down it. Clean out the float chamber with a cloth and petrol, re-assemble the parts, and test the carburetter again. In cases where the pipe supply is restricted, take the pipe off from the tank and blow down it until it is free. If the pipe is not blocked, turn on the petrol tap at the tank and watch the flow. If it is poor, clean out the tap and tank, for the root of the trouble lies there. In the same way the filter should be tested and the gauze thoroughly cleaned. Specially made petrol pipes of composition often perish after a time, and should therefore be renewed before they disintegrate and cause choking. Petrol pipes should never be unsupported for more than short lengths as the vibration of the engine will cause fracture. A rubber joint is often inserted in a long length of piping to overcome this risk.

Repairing a Broken Petrol Pipe.

To repair a broken pipe rubber tubing can be slipped over the adjacent broken ends, which are then bound up with copper wire and insulating tape. A punctured float will also cause trouble in the carburetter. This can be detected by removing the float and shaking it. If there is petrol inside, fit a new float and return the other to the mechanics, who will heat it, thus vaporizing the petrol, which will emerge in bubble form if the float is immersed in water, and thus indicate the position of the puncture. The float can then be soldered up and made air-tight again, if care is taken that the addition of the solder does not weight it and so upset the level of the petrol in the jet. The correct mixture

is indicated by a perfectly-running engine, and if misfiring occurs when the ignition is correct it will indicate too rich or too weak a mixture. Black smoke from the exhaust indicates too much petrol, as does a long yellow flame. Too rich a mixture may be due to flooding of the carburetter at the jet, or shows that the air valve is stuck and remains closed. A restricted supply of petrol, or air leaks in the carburetter or induction pipes, will result in too weak a mixture being formed. In winter, larger jets are often used than would be necessary in the summer. In cold weather it is possible to facilitate starting by heating the carburetter and inlet pipes with a hot rag to assist vaporization.

Difficulty in Starting.

The main air ports to the carburetter may also have to be closed during induction in order to prepare a very rich mixture for starting up. If the engine and carburetter are water jacketed, hot water can be poured into the radiator, and this will materially assist in starting the engine. Sometimes, although the petrol may have been filtered through gauze or chamois leather, water will be found in the jet and float chamber. Unless it is removed misfiring will occur. Petrol or oil funnels and filler caps should never be left on the ground, as they pick up dirt, which will probably enter the petrol and oil tanks and cause trouble. On an engine such as the Gnome, where no float chamber is fitted, these remarks apropos float chamber troubles obviously do not apply. In this latter type of engine the only thing that can go wrong is a petrol jet situated in an inlet pipe through which air is taken into the crankcase. The regulation of the petrol supply, which is by hand instead of by float, is, however, a much more difficult matter. Sometimes the air control lever or throttle wire may break and cause the engine to stop. If the return springs of these levers are set to keep the throttle and air valves open in case of failure of the engine controls, this trouble will be overcome.

Inlet pipes can only cause trouble by cracking at

their joints or breaking away at the unions. In either case the effect is the same. Air enters the pipe, dilutes the mixture to a greater or less extent and causes misfiring or weak mixture. Binding up the faulty joint with medical, or insulating, tape will cure this temporarily. If the rubber joints and clips employed on some engines become slack they will cause misfiring and loss of power through weak mixture. Sometimes frost or snow may reach an inlet pipe and remain there undetected until it freezes. To prevent this all such pipes should be shielded from the rush of cold air by some means, or wrapped up in felt.

Signs of Seizing.

Piston and obturator rings. Piston rings, when once they are properly fitted, should give no trouble whatever. On new engines, or when the lubrication system is faulty, they may seize in their grooves or break. When rings are inspected they should be clean and bright all round. Brown marks are signs of excessive heat or friction, or show that they do not fit. They should work freely in their grooves in the piston laterally, and also should have the necessary clearance up and down. If the ring is too tall it may be eased down by rubbing on a sheet of emery on a surface plate, after having been brought down with a smooth file. Only one side of the ring should be filed and that placed uppermost in the piston groove. The gap can be measured by placing the ring in the cylinder and moving it up and down to verify it at various positions, as it may be more worn at some points than others. If the piston and obturator rings are tight they will make this failing obvious by blueing up the steel radiating fins and the top part of the cylinder, so that the trouble can be traced quite easily. A gradual falling off in engine revolutions indicates that blueing up is taking place, and the pupil should therefore land before the faulty piston seizes. Great care should be taken in removing piston rings; small bent pieces often can be inserted between them and the piston to ease them out of their groove. If the

ring is sprung too wide while being slipped over the piston it will break, as it is made of cast-iron and is very brittle. Just in the same way that all carbon must be scraped off the cylinder head and piston when the engine is taken down for overhaul, so must the grooves for the rings be cleaned in order that the rings shall work freely in them. It is a good plan to boil the whole engine in a solution of caustic soda, so as to soften the carbon and thus facilitate its removal. In dismantling an engine great care should be taken with every part. Each should be methodically cleansed in petrol and put away in a clean box. Units can be taken apart and stripped separately. When taking down an engine it is a good plan to do it bit by bit, inserting nuts and bolts in their respective holes, partly to prevent them being lost and also to make sure that the right bolts and nuts are used for their respective parts when the engine is put together again.

Importance of Cleanliness.

Lubrication systems will require cleaning out with paraffin from time to time. All the gauze filters and screens soon become more or less blocked with dirt, and this must be removed occasionally. It will be found advisable to drain the oil out of the engine when it is hot and fill up with half-a-gallon of paraffin. Rotate the propeller 10 or 20 times to allow the paraffin to reach the various oil ducts, and then drain out the paraffin and fill with clean oil. Paraffin is a much better cleansing medium for this purpose than petrol, as it possesses a certain lubricating quality. The engine should always be run on the oil recommended for it. If the consumption is excessive there must be some reason for it, and the fault should be found and remedied. In cold weather the oil may congeal, when it must be warmed over a stove before being used, or alternatively it may be diluted with 5 per cent. of petrol. This will mix with the oil quite easily and will thin it out to the correct consistency. Oil seen emerging from the crankcase should be examined. If it is

poor or dirty it should be emptied away and new lubricant poured in. On some engines it takes the oil a long time to reach the bearings, especially in cold weather. This is the case particularly in machines where the oil tends to accumulate in the lower end of the sump, should the machine be standing on the ground with the tail down. Sometimes, in order to warm up this type of engine more effectively, the tail is jacked up to a height of several feet while the machine is in the flying position. The oil will then be distributed evenly throughout the crankcase and will reach the pistons and bearings more quickly. In any case it is advisable to warm up the engine gradually and slowly from cold, and never to run it at maximum revolutions for longer than is absolutely necessary. This applies not only when testing the engine on the ground, but also when flying. Very seldom, except in climbing, is full engine power desired or needed. Level flying can be carried out on most machines with the engine running at several hundred revolutions below its maximum.

Common Engine Failures.

Should the engine stop suddenly the cause will be failure of ignition or of the fuel supply. To cure it, test the magneto and switch, and then the petrol supply.

The misfiring of one cylinder will probably be due to a faulty plug. If the misfiring is accompanied by a loud banging, or rattling, the cause is probably a broken valve.

If one set of cylinders misfires the reason may be put down to magneto failure.

If irregular or infrequent misfiring occurs it will be because the rocker arm on the magneto contact breaker sticks occasionally, or because there is oil or dirt on the distributor, or the platinum points require trimming.

Misfiring, accompanied by spluttering, is brought about by an insufficient supply of petrol or the air valve sticking.

Difficulty in starting the engine may be due to the

cold weather, or the fact that the plug points are set too far apart. The magneto contact breaker or distributor may require cleaning, or there may be an air leak in the induction pipe. If the engine runs well when it has once been started the last cause may be suspected, as the mixture might be too weak for starting but correct for general speed.

Black smoke from the exhaust may be the result of too rich a mixture, or show that the carburetter is flooded, or an air valve stuck in the closed position.

Run a New Engine Gently.

Should the number of engine revolutions drop after it has been run for some time, without misfiring, partial seizing up of bearings or pistons has probably occurred, as the result of either faulty lubrication or lack of play in the parts concerned. This is likely to occur on a new or recently overhauled engine. Great care should therefore be taken during the first few hours flight of a new engine in order to allow the bearings and other parts to run in. If the steel cylinders are blued, or discoloured, the obturator ring may be suspected, if one is fitted. In passing, it may be mentioned that an obturator ring is a special form of piston ring used on rotary engines in conjunction with the ordinary type of ring. It is made of brass, and is L shaped, with the ordinary piston ring between the piston and the downward stroke of the L. It is necessary owing to the uneven cooling of the rotary engine, the front of the cylinders receiving all the cooling draughts.

If the engine runs well for a few seconds, then splutters and continues to run, the cause may be a partially choked jet or water in the petrol.

Bad vibration of the engine is generally due to the misfiring of one cylinder, but it may also be caused by a loose propeller, or the engine being loose in the engine bearers. Sometimes the propeller is faulty, and this causes the engine to vibrate, in which case it should be changed at once. A small chip out of a propeller will upset its balance and will affect the smooth running of the engine.

General Hints on Running an Engine.

Always warm it up slowly and gradually.

Never run it at full power, in the air or on the ground, for longer than is absolutely necessary.

Use as little petrol and throttle opening as is possible in accordance with flying conditions.

Remember that in case of engine failure it is always safer to make a landing with some cylinders firing than to continue until the whole engine gives up.

Listen to the sound of the engine and try and detect faults before they become serious.

Never open the throttle suddenly, as it strains the engine.

Run the engine on the chocks as little as possible, and on rotary engines do not use the "blip" switch more often than is necessary, as the life of an engine is greatly curtailed by non-observance of these rules.

Have the engine thoroughly overhauled at the regular intervals arranged for it.

On long cross-country flights ease the engine from time to time by throttling down or gliding.

Never go up without testing the engine and never go up with a misfiring or unsatisfactory engine. Have any trouble put right on the ground.


CHAPTER IV.**The First Lesson in the Air.**

PRIOR to receiving the first practical instructions in flying the pupil should realize that he cannot learn too much about the theory of flying and the means of controlling an aeroplane before he actually finds himself in the pilot's seat ready for his first lesson. He will learn very much more quickly if he has had already a preliminary grounding in the rudiments of mechanical flight than if he starts without a notion as to how or why a machine flies. Both instructor and pupil, therefore, will save themselves a good deal of time and trouble if the former explains to the latter the elementary principles of flight before attempting to instruct him upon handling a machine in the air. Emphasis should be laid on the particular importance of the method of controlling the machine and the mistakes to be guarded against in the air.

Dual-control Instruction.

The method now almost universal of teaching pupils to fly is by means of dual-control machines. In the early days, after having acquired a theoretical knowledge of an aeroplane and the method of controlling it, the pupil was sent off for rolling practice, or "taxying," on an under-powered machine which could not possibly leave the ground. The next stage was to give him a machine with a wing surface sufficiently large just to allow him to get off the ground for short hops. From this he would advance to a machine which would just fly, upon which he would make "straights" until he was proficient, later on attempting turns on a more powerful machine.

This method has been superseded at all Service schools in favour of dual-control instruction. This

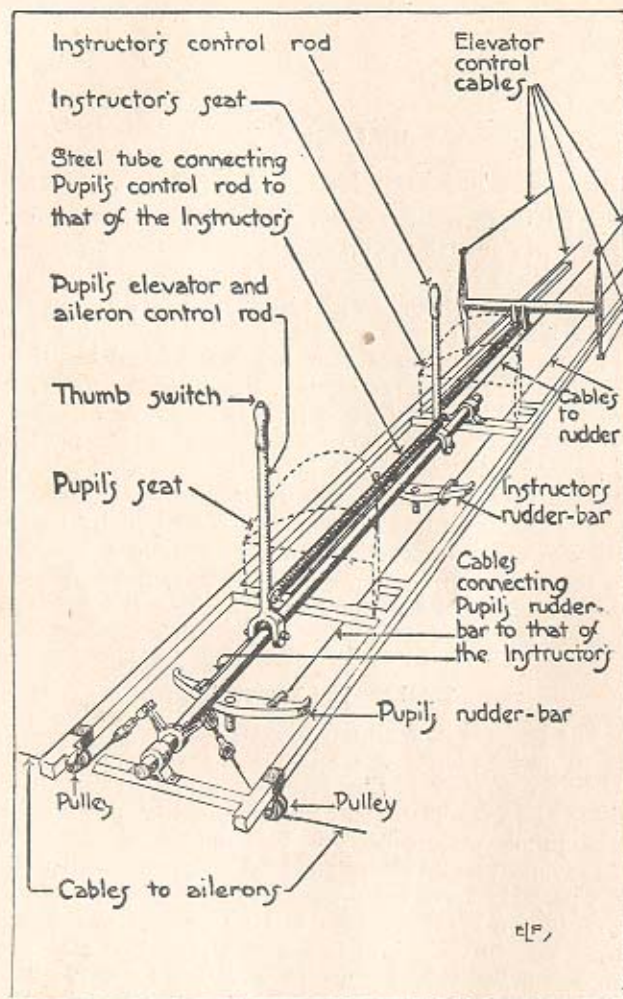

The duplicate controls of a dual-control machine. On different types of machines the seating accommodation is arranged in different ways. Sometimes the pilot sits in front and the pupil behind, and vice versa.

means that the machine is provided with two sets of rudder and control levers, one to be worked by the pupil, who generally sits behind, and the other by the instructor. On some machines one set of control levers is used, but they are placed in such a way that the instructor can work them by reaching over the pupil's shoulders. It is probably best for the pupil to be put in the pilot's seat from the beginning and for a telephone or speaking tube to be arranged between him and the instructor.


Communication in the Air.

It is a great advantage if some means of communication be installed between the pupil and his instructor. A system of speaking tubes may be fitted or signs may be arranged. By this method a great deal of verbal instruction can be given in the air and the effect of the control movements demonstrated. This method obviously saves a great deal of time. If the instructor's position permits—as, for instance, if he were reaching over the pupil's shoulders in order to handle the controls—he may be able to speak to the pupil in the air without the need of a speaking tube.


Opinions are divided as to what is the best method and machine for teaching pupils. Some instructors prefer a "pusher" type, whilst others think that time is saved by taking a pupil on a "tractor" type from the beginning. In any case, the school machine should not be too fast or too sensitive on the control.

Working the Controls.

There are many different methods of instructing, and it will generally be found advisable for the first lesson in the air for the instructor to take the pupil up to a calm and safe height, say 1000 ft. or 2000 ft., and then allow him to feel the controls. It is here that the importance will be appreciated of the pupil knowing what he ought to do before he has actually the chance of doing it. He should not be frightened of working the controls and noticing the effect they have on the

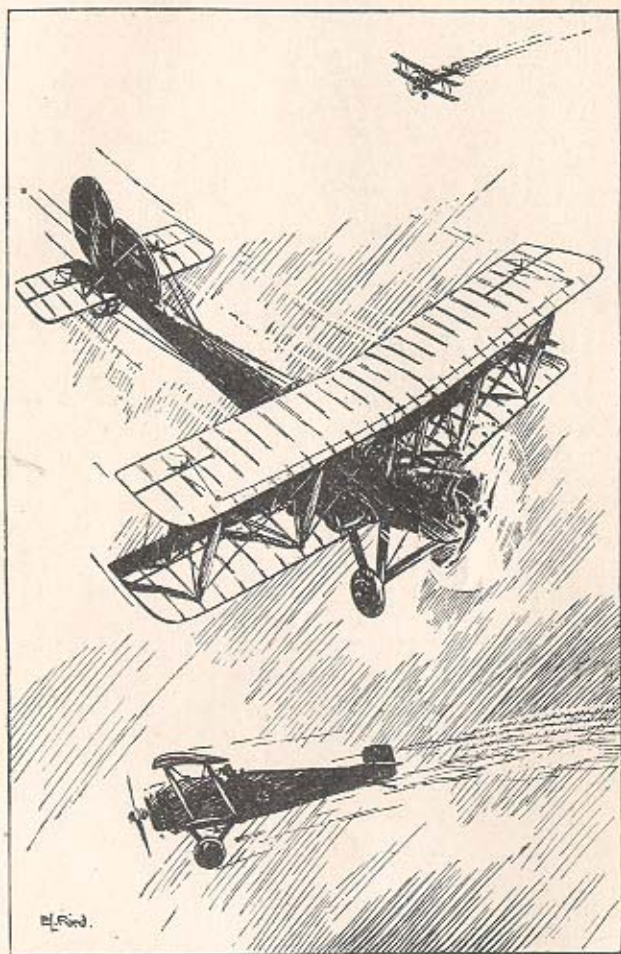

The tractor type of aeroplane with the propeller and engine in front of the machine. Note the long, tapering body or fuselage terminating in the tail. The tractor type of aeroplane is now employed practically universally, the old type pusher machine having been superseded even in school work.

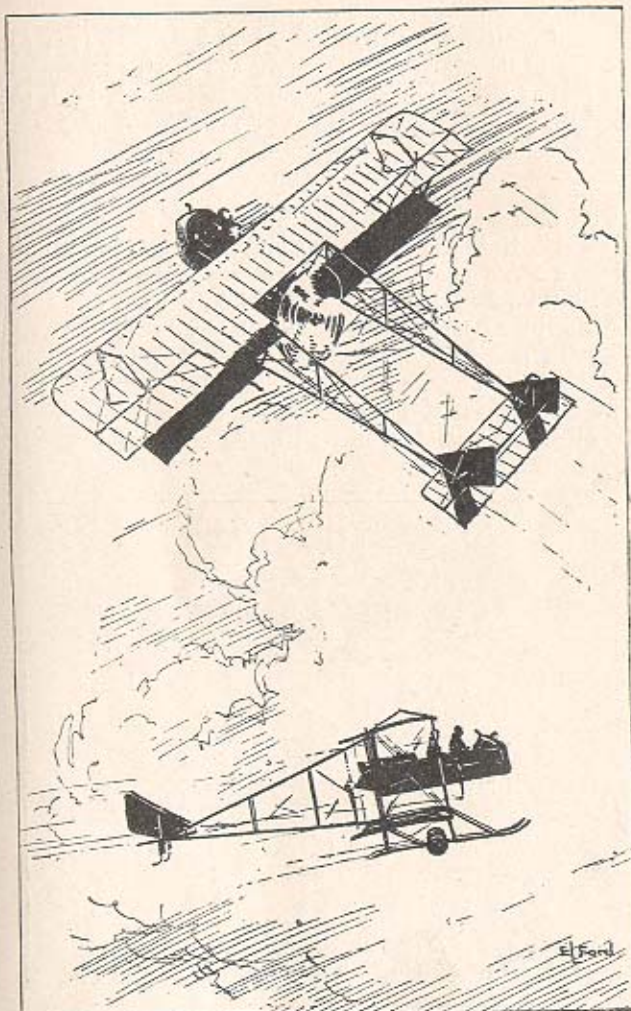


The pusher type of aeroplane with the propeller behind the pilot. Note the pilot's seat in the nacelle in front of the planes and the tail booms and open framework in place of the fuselage on the tractor type.

machine. The instructor may allow him to get into an unusual position and then show him how easy it is to get out of it. It is far better for the pupil to acquire the feel of the machine as quickly as possible than to sit still and watch the instructor do the work.

Flying Straight.

The first lesson is to learn how to fly the machine straight. Not only must the pupil fly in a straight line towards some point which he selects in front of him, but he must fly the machine level, i.e., neither upwards nor downwards. He must fly laterally level, and not with one wing up and the other down. He will find that, to begin with, he is unable to control the machine in these three directions at once. He can get the directional straightness with the aid of the rudder

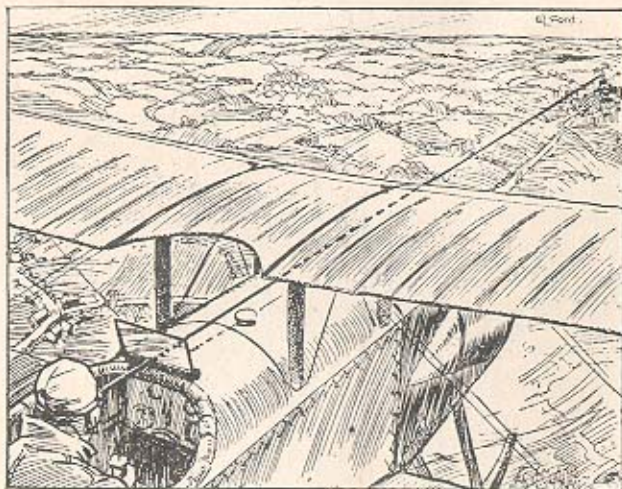

Flying straight. How to fly straight by selecting some prominent object on the horizon, such as a church, and steering the machine to it with the rudder. Another good method of flying straight is to steer the machine along a straight stretch of road or railway, or to fly it parallel with these landmarks.

The machine is kept straight by means of the rudder.


bar, but he may allow the machine to roll sideways, or see-saw. On some machines it is necessary to keep on a certain amount of rudder in order to make them fly straight, and the pupil should realize that if he finds the machine drifting away to one side from the point he has chosen he should rudder in the opposite direction, and, if necessary, keep the rudder on.

Flying Level.


In learning to fly level, i.e., neither climbing nor descending, the horizon should be watched and also the trim of the machine generally when it is set by the instructor in the correct position. The pupil can then attempt to keep the machine in that position by moving his control lever forward to prevent the machine climbing, or backward to prevent it descending. If he knows the correct flying level speed of the machine, he can also watch his air speed indicator. He must remember that any increase in its speed (with the engine running at its normal number of revolutions) means that the machine is descending, and that any decrease in speed indicates that the machine is climbing. It is also necessary to bear in mind the fact that the air speed indicator is sluggish in action and only registers a change in speed after the machine has made that change. It should be borne in mind also that, if he is high, he will never come to any harm by allowing the machine to go too fast; whereas, on the other hand, he can easily allow the machine to get into an awkward position through permitting the speed to drop below flying speed, for it is the relative speed between the planes and the air that preserves the machine in equilibrium.

Horizontal Level.

To keep the machine horizontally level it is necessary to watch the horizon and to attempt to maintain the front elevator (if there is one—or if the machine is a tractor, the wings) parallel with the horizon. This will only be attained by practice, and the pupil should not be disheartened if he does not pick it up at once.

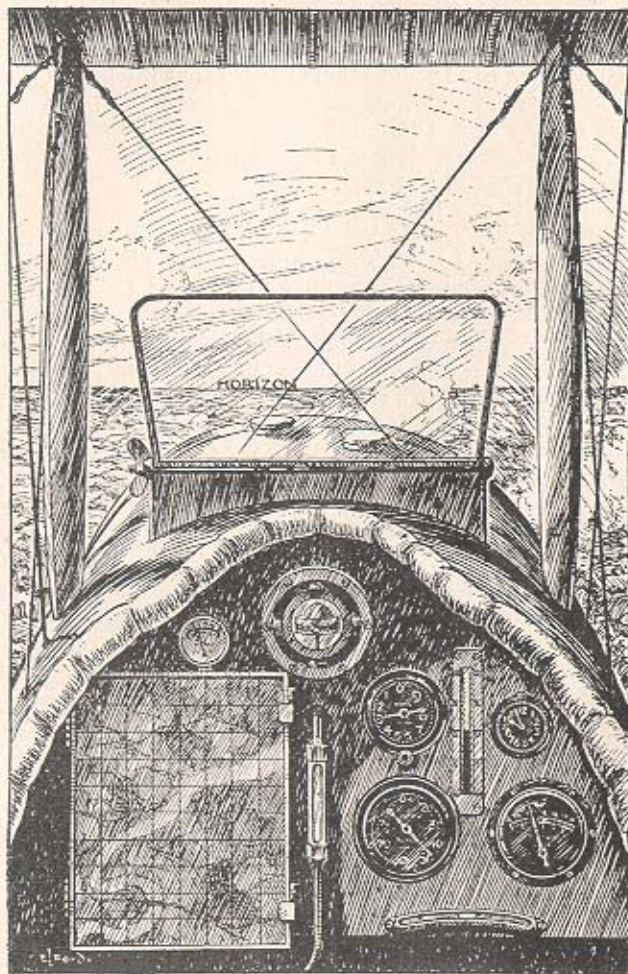

Trimming the machine to fly level (tractor type of machine) by keeping the underside of the top plane parallel with the horizon. If the pupil notices that one wing is down, he must move the control lever sideways in the opposite direction to pull it up, and then centre the lever.

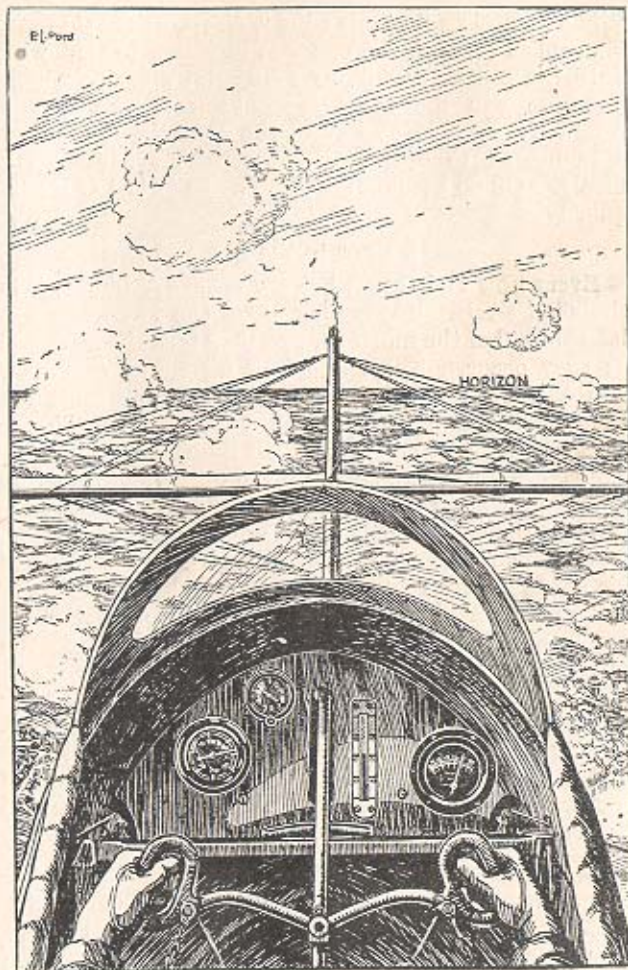

In flying level on the Maurice Farman school machine, the front elevator is trimmed parallel with the horizon. This type of machine, which at one time was largely used for school work, has now been superseded by the tractor type. It is commonly known as the Long Horn, as opposed to the Short Horn, Maurice, which had no front elevator.

When he notices that one wing is down, he should move his control lever in the opposite direction to that wing until the machine is flying horizontally again, whereupon he can move his lever back to the neutral position. In working any of the controls, it must be remembered to operate them gently, gradually and firmly. On no account should they be jerked or moved quickly.

Bumps in the Air.

Every now and then what are termed "bumps" in the air are felt. These may affect the fore-and-aft or lateral level of the machine, and they must be corrected as they occur. The amount of correction necessary will only be found by practice. If a bump puts the front of the machine up, the pupil must move the control lever forward, and when flying level again he can centre his control. If, on the other hand, a bump sends one wing up, the lever must be moved sideways towards the wing that is up, in order to allow the other wing to rise; then, when he is level, he again centres his control. On some machines lateral bumps can be corrected by working the rudder in conjunction with the control lever. To do this he must rudder into the bump and work his control lever in the same direction. Thus, if a bump sends the right-hand wing up or the left-hand wing down, whichever way he likes to take it, the pupil must warp to the right with his control lever and rudder to the right also. When he is level again he moves his control and rudder into the central position as before.

Turning.

The next stage, probably, will be to make a turn. This is quite simple. It is wise to begin a turn with a slight increase of speed, if the machine has a small range of speed. Both the rudder and warp, or the control lever, are then moved gently and simultaneously in the direction in which it is desired to turn, the right foot being pressed on the rudder to turn right, and the control lever moved to the right to pull up the left wing. The machine will bank gently and come round


quite easily. Once the correct amount of bank is on, the lever can be centred. When the turn is completed the rudder and bank are taken off again, by moving the lever in the opposite direction, following up with opposite rudder and then moving the control and rudder to their neutral positions. If the rudder is moved in the opposite direction too soon, the nose will go up and the machine will slip inwards. The controls must not be centred again until the machine is laterally level. This method applies in general to gentle turns.

Before going on to describe how to do steep turns, the pupil must grasp the action that the elevator and rudder have on the machine. When the machine is flying level and straight, a backward movement of the control lever will always cause the nose of the machine to attempt to reach the tail, and in doing this the nose will go up above the horizon. The application of right or left rudder will, in the same way, always tend to make the nose of the machine try to turn to the right or left wing tip, so that, when the machine is flying level, the rudder causes the machine to turn, while the backward or forward movement of the control lever causes the machine to climb or descend, or fly level, as compared with the horizon.

Inversion of Controls.

Now consider what happens when the machine is made to execute a vertical banked turn and is on its side relative to the horizon. Take the case of a left turn. If left rudder is held on when the machine is on its side in the turn, it will cause the nose to approach the left wing, as in the previous case, but, judging the position of the machine from the point of view of the horizon, it will cause the nose to drop below the horizon. Right rudder will have the opposite effect, i.e., it will make the nose of the machine try to approach the right wing, which is uppermost; in other words, comparing the nose again with the horizon, right rudder will make the nose go up.

Next, take the action of the elevator when the machine is on its side in a steep turn. If the control

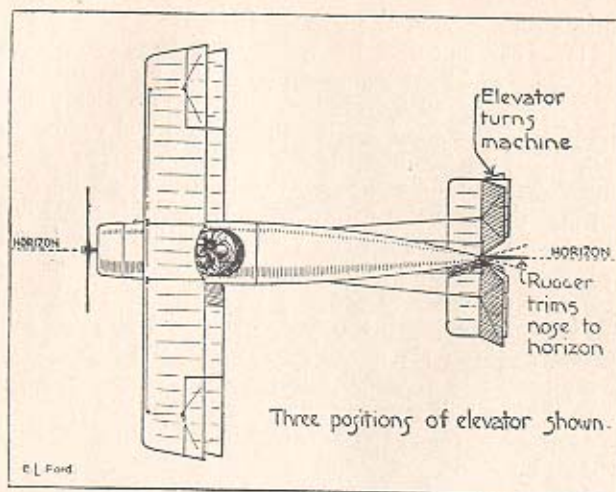


Illustrating the inversion of the controls on a vertical turn.

lever be pulled back, it will cause the nose of the machine to try to approach the tail, but as the machine is on its side, in relationship to the horizon, this backward movement of the stick will simply speed up the turn and make the machine turn more quickly. So that if the nose of the machine is still compared with the horizon, it is found that on a vertical bank the nose is trimmed above or below the horizon by the use of the rudder and the machine made to turn by the use of the control lever which operates the elevator. At turns of 45 degrees, the rudder acts half as rudder and half as elevator, and the elevator acts half as rudder and half as elevator. At lesser angles the elevator is more elevator than rudder, and the rudder more rudder than elevator, when the nose of the machine is compared with the horizon, whilst at steeper angles of turn the elevator becomes more and more the rudder, and the rudder more and more the elevator.

Now to describe the method of making a steep turn, the control movements for which the pupil, having mastered the idea outlined in the preceding paragraph,

will not find at all difficult to understand. To make a steep turn to the right (or left), bank and rudder are applied in the desired directions; in this case to the right, until the machine is more or less on its side. Then the nose of the machine is trimmed to the horizon by means of the rudder, right rudder bringing the nose down and left rudder bringing it up. It will be found necessary to ease off the right rudder while the stick is then pulled back so as to make the machine turn. While the stick is pulled back, it will be found that the bank of the machine is inclined to get steeper and steeper owing to the increased speed and consequent

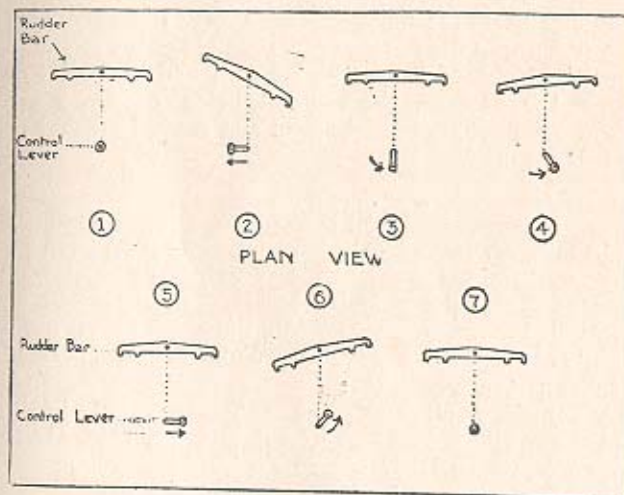

Movements of the rudder and control lever on a steep left-hand turn (plan view). (1) Control lever and rudder in neutral or central position. (2) Left rudder and left control lever—machine takes up bank. (3) Rudder eased off to trim the nose of the machine to the horizon, and control lever brought back to make the machine turn. (4) Rudder eased off still more if necessary, and the control lever brought to opposite side and fully back to prevent overbanking. (5) Coming out of the turn—control lever moved over to the right first. (6) Then, as the machine approaches the horizon, the control lever can be moved forward and right rudder applied. (7) When the machine is approaching the horizontal both levers are moved centrally.

lift imparted to the left wing by its controlling aileron which is down, so that it is then necessary to ease off the bank slightly; that is, the stick, besides being pulled back to speed up and make the machine turn, must be moved towards the opposite side, viz., to the left. Once the correct position of the levers has been found the machine will continue to turn round and round without losing height or increasing its bank or radius of turn. To get out of the turn, opposite bank is used; that is, the stick is moved to the left, and, when the machine is approaching its horizontal and lateral level again, left rudder must be applied and the stick can then be moved forward again to its central position. Gliding and climbing turns are made in exactly the same manner, except that, in the former case, the nose of the machine must be trimmed below the horizon, and in the latter above the horizon, the amount below or above the horizon depending on the speed and rate of descent or ascent required.

Learning to Land.

In passing, it may be noted that there is no need for the pupil to hold the controls as tightly as he can, or to jam the rudder with his feet. A machine can be controlled with one hand holding the control lever quite lightly; in the same way, the rudder can be operated by a mere touch of the toe.

When the pupil can fly the machine correctly in the air, he will be taught to land and get off. Many instructors give landing practice by flying round and round in circles and landing once in each circuit. This method is all right if the machine is brought to a standstill after each landing, and a few words of advice are given to the pupil as to the mistakes he made in his previous get off and landing. An instructor can teach a pupil as much, if not more, by talking to him and taking him into his confidence than by going on flying for hours without verbal instructions. The personality of a pupil should be studied if the best results are to be obtained from him. In giving landing and getting-off instructions, the faults made on the previous circuit

should be explained. If a pupil does not understand why the machine behaved in such-and-such a manner when he last landed or got off, he should ask the instructor the reason. The instructor would also be well advised to ask the pupil at the end of each flight if he has any questions. Even if he has not, a few words may be given in explanation of any point that has arisen whilst in the air. All this shows the advantage of some means of communication being arranged between pupil and pilot if the flying lessons are to be concluded with the greatest expediency.

It may be pointed out that, to begin with, short flights of 10 to 15 minutes duration are of more value to the pupil, who easily becomes tired until he gains experience, than longer flights of from 30 to 60 minutes.

Getting Off and Landing.

In getting off, a pupil must accelerate the machine gradually, keeping it straight towards some point by means of the rudder, and when it has attained its flying speed pull back the control lever or elevator very gently. Generally, when the machine is just in the air, he should ease the lever forward momentarily to allow the machine to gather more speed. He can then continue his climb with a margin of safety in hand for emergencies.

In landing, the pupil first cuts off the engine, puts the machine at the correct gliding angle by moving the control lever forward, then, on approaching the ground, which he must watch intently 20 or 30 yards ahead of him, he pulls the lever back slowly until he has flattened out a foot or two above the ground. If he holds the lever still, the machine will slowly sink as it loses its flying speed and touch the ground quite slowly and without any jar. In landing, it may be necessary, owing to bumps or misjudgment, to ease the control lever forward or to hold it for a moment, but the general tendency will be a backward one.

Some further notes on getting off and landing will be found in the chapter which deals with the pupil's first solo flight.

When to Make a Solo Flight.

The moment when a pupil is ready to go solo is a point of importance both to him and to the instructor. The latter has the responsibility of a possible accident if the pupil is sent up too soon; while the pupil has his own neck to consider and the damage he may do to an expensive machine by making a bad landing, or committing some other error, which ends in an accident, through being over-confident or too keen to go solo. The time a pupil takes to learn depends on the type of machine upon which he is taught, his capabilities, and also the instructor. Some men learn to fly in 2 hours; some take as long as 10 or 12 hours.

An instructor should also ask the pupil if he feels confident and would like to go up solo. If the reply is in the negative, then, generally, more instruction must be given. The pupil must have confidence in his ability to handle the machine before he goes up alone, which will be increased if he has already gained a certain amount of faith in his instructor as a judge of his own capabilities.

Before a pupil is allowed to go up alone he should be able to land, take a machine off the ground and fly it in the air for six short circuits without the instructor touching the controls.

If the pupil feels confident, and the instructor is satisfied as to his capabilities, he should go up solo, preferably on the identical machine on which he has been instructed. To put the pupil in another machine, where, perhaps, the instruments are placed differently, and where the adjustment of the machine may be different, even though it is of the same make, is to handicap him. Again, to teach a pupil in the front seat of a two-seater and then to send him up solo in the back seat, or vice versa, is to take a risk which is quite unnecessary, for the positions of the pupil and instructor can easily be changed on most dual-control machines. A pupil is thus given every chance of making a good first flight. He should be sent off, if possible, with little or no warning, in order that he may be

caught with his blood up, as, for instance, immediately after an instructional flight. Some pupils are most imaginative, and if they have no time to ponder over the possibilities of their first solo flight, they take the air much more readily and confidently.

The first flight should be on a calm day, preferably when there are no other machines in the air. Exact instructions as to where to fly and the length of the flight should have been received beforehand. Generally, four circuits and landings are enough for the first solo. The pupil should have been taught at what height, and over what landmark, he should switch off in order to land at the desired spot in the aerodrome. Having satisfied himself that the machine is in proper condition, the instructor will do well to withdraw so as to let the pupil get into the air without any nervousness that may be caused by the thought that the instructor is watching him.

Instruction on Advanced Types.

When a pupil can fly one type of machine really well there is little need for a great deal of further instruction on the more advanced types. For this reason it is better to keep a pupil on one type of machine for several hours until he can fly it really well than to send him up on other kinds of machines, none of which he has had time to fly properly. Given sufficient room on the aerodrome for fast landings, a man who can fly one type of machine well should be able to fly most others with tolerable success. He will only master special peculiarities of different types of machines by experience. Probably he will notice that the speed and sensitiveness of the controls are the chief points of difference.

A great advance has been made recently in dual-control machines, some fast machines having dual control nowadays. There is, therefore, no need to take unnecessary risks by sending pupils up solo straight away on these machines. It is better to work up from slow and sluggish machines to fast and sensitive ones, with a little preliminary dual control on each. It is

only the landing and getting off that require attention, and half-an-hour's instruction on these points should be sufficient. The pupil should remember, however, that he is not entitled to as much instruction on the more-advanced types of machines as when he was learning to fly. In the early days, when there were only one or two types of dual-control machines available, as soon as pupils could fly them they had to go on to the more-advanced types without any instruction whatever.

CHAPTER V.

The First Solo Flight and Aerodrome Practice.

BEFORE starting on a flight, whether the first solo or a 200 miles cross-country journey, it is a wise plan for a pilot to look over his engine and machine methodically. He should not take it for granted that the machine is ready to fly because the mechanic reports it so, but must look over it himself. Some pilots have the mechanical instinct born in them; others have not, and will never attain it. The latter are the people who are in the habit of using pliers to undo nuts, or who employ wood chisels in the place of a screwdriver.

Attention to the Engine.

First glance over the engine, which is the more important part; and here a thorough knowledge of aero engines will be of great value. The following are some of the details that should be examined:—The terminals on the sparking plugs and the magnetos should be tight; both the high and low-tension wiring should be neatly clipped up and not lying about the machine in festoons, which might tend eventually to chafe through and cause a short circuit (at any points where wiring touches the metal portions of the machine, some form of additional insulator, such as insulating rubber tape or a fibre ring, should be inserted); the petrol unions should be tight; rubber connections, if fitted, must not be perished; and if the petrol pipe is made of some woven material it should be examined for signs of disintegration. Tappets and rocker arms should be inspected, and both should be properly lubricated. It should be noticed if any split pins are missing, and that those that are fitted are not loose. If automatic inlet valves are used, the pupil should see that they are working properly. Finally, the pilot should be satisfied

that there are no petrol or oil leaks, and that the switch is working properly.

Overlooking the Machine.

Next, the machine itself must have some attention. After some hours flying experience on one type of machine, the pilot will know which parts are most liable to give trouble. These may be the wires slacking off in the tail, or the tail itself may be liable to work loose. Wear should be looked for in the Sandow shock absorbers in the under-carriage, or perhaps on an aileron which is inclined to bind. Loose or missing nuts and bolts should be looked for. The turnbuckles should be correctly locked and the control wire pulleys or guides greased properly. They should work easily without too much slack in the wires. Of course, the controls are most important, the most vital being the elevator control. They must be tested by sitting in the machine, working the control lever and rudder bar, and, at the same time, observing if their operation has the desired effect on the ailerons and tail. If the wires show signs of chafing where they pass over the pulleys, they should be changed. In some machines it is possible for the mechanics after an overhaul to connect the elevator control wires in the wrong way, i.e., they may forget to cross them. It is thus necessary to pay particular attention to the machine after it has been in the shops or when the controls have been overhauled. The nuts and bolts and the locking arrangements for securing the landing chassis wheels should be inspected occasionally.

Preliminary Engine Tests.

Whilst sitting in the machine the pilot should test the engine and see if it is developing its proper number of revolutions; if not it requires attention. This is an important detail, because a slight falling-off in engine revolutions means a very great reduction of the power developed. At the same time, it should be remembered that an engine will often give 50 or 100 more revolutions per minute in the air than it does on

the ground, and this must be allowed for. A skilled pilot can tell, of course, by the sound of his engine whether it is missing fire or running unevenly or weakly. He should then switch off and tell the mechanics to feel the cylinders, the cold one being that causing the trouble. A partial misfire is always more difficult to locate than a total misfire. The latter must be due to one of two things—either a choked or broken pipe, or faulty ignition at the magneto or switch.

Knowledge of the Engine.

Too much importance cannot be attached to the need for the pilot to understand his engine and machine perfectly. When he knows his engine well, and has the feel of the machine, he can tell exactly how it is flying, and, what is more, he can often discern faults in the machine or the engine before they become really serious. If his engine fails, he should be able, after some hours flying, to diagnose the trouble before he comes to earth, just in the same way as a good motorcar driver can tell what has caused his engine to stop before the road wheels of his car have come to rest.


In warming-up an engine it is wise, when cold, to open it up slowly, in order to allow the metal to expand evenly and to permit the oil to thin and circulate properly through the bearings before full power is applied. In cold weather a longer period must be given for warming-up than in summer time, when the oil is not congealed. In very cold weather the castor oil used on many machines will solidify almost to the condition of candle grease. To thin it, methylated spirit may be mixed with it in the proportion of one pint to a gallon of oil; petrol can also be mixed with the oil in the proportion of 1 in 20.

The pilot should remember that the oil supply must be turned on before starting the engine, otherwise it will seize up very soon. On a rotary engine he must note the rise and fall of the oil contained in the pulsator glass domes. If these pulsations show up, he can take it that the oil pump is working and the oil supply turned on.


Starting Up.

The engine and machine having been tested, the pupil is now ready to start. It should be noted that the onus of accidents occurring when starting up the engine by swinging the propeller rests with the pilot. Incidentally, the mechanic should always treat the propeller as if the engine were "on contact," and, for this reason, it is a good plan for the switch to be fitted on the outside of the machine where the mechanic can see it.

When ready to suck the mixture into the cylinders, the mechanic shouts "Switch off!" or "Suck in!" whereupon the pilot, first looking to see that the switch is off (it should have the "On" and "Off" positions clearly marked), replies, "Switch off." The mechanic then sucks in until immediately ready to start the

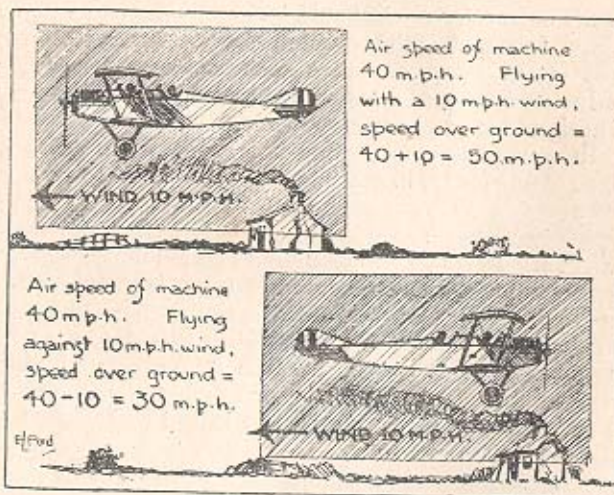

The importance of wind. The air speed of the machine is relative to the air, and not to the ground. If the whole atmosphere is moving at 10 m.p.h., and the machine air speed through the air is 40 m.p.h., the speed of the machine over the ground will be 50 m.p.h. Against the wind the ground speed will be 30 m.p.h. Hence the importance of getting off and landing against the wind.

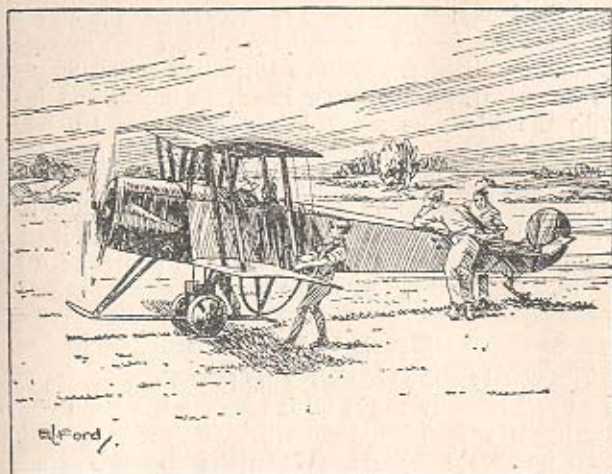

Starting up without chocks. Men holding back the machine and keeping the tail down while the engine is tested.

engine, when he shouts, "Contact!" The pilot switches on and shouts, "Contact!" The mechanic then bumps the propeller over compression and the engine should start. The words "contact" and "switch off" are chosen so that there shall be no doubt as to what is meant, as there might be if the words "switch off" and "switch on" were used instead. Both mechanic and pilot should see that they speak distinctly and loudly. The switch must always be left off except when it is desired to start the engine. The importance of this can be realized when it is mentioned that a man's arm or wrist can be broken easily by the premature firing of the engine.

Importance of Wind.


When starting, the pupil must remember to face the wind, and the same remark applies to landing. In both cases this is done in order to reduce the speed at which the machine leaves or lands on the ground. For instance, if there be a 10-mile-an-hour wind blowing,

and the lowest flying speed of the machine is 40 miles an hour, by facing the wind the pupil can leave the ground and land at 40 minus 10, which equals 30 miles an hour. If, on the other hand, he starts and lands with the wind, he must do so at 40 plus 10, which equals 50 m.p.h., so that, in this case, it is seen there is a difference in the ground speed of getting off and landing of 20 miles an hour—a very considerable item when it is remembered it may be necessary to land in a small field where a limited space is allowed for the "run," or "carry," after the landing.


Signals to Mechanics.

The usual method of signifying to the mechanics that the pupil is ready to get off is to wave the hand above the head, whereupon they will withdraw the chocks from under the wheels. When the chocks are withdrawn, the pupil will do well to see that all the mechanics are standing clear. It happens sometimes that one of them, possibly holding down the tail, has not seen the signal, and he or his clothing may easily become entangled in the machine if the pupil went off unexpectedly. There is another point which the pupil must guard against, and that is the possibility of the chocks being withdrawn in mistake before he is ready, or, alternatively, in a mechanic starting up the engine without first seeing that the chocks are in position. If the pupil were not already warned against these possibilities, he might easily run over the mechanic, owing to the forward rush of the machine, through the throttle being too wide open, or, in the case of a rotary type of engine, which cannot be throttled down so well as a stationary one, through keeping the switch on too long.

Having satisfied himself on these points, the pupil should make certain that he has a clear run in front of him and that there are no other machines in the neighbourhood, either getting off or landing, which can possibly baulk him. This applies especially to machines which might be landing over his head. If he has to taxi out some distance in order to get into the wind, he

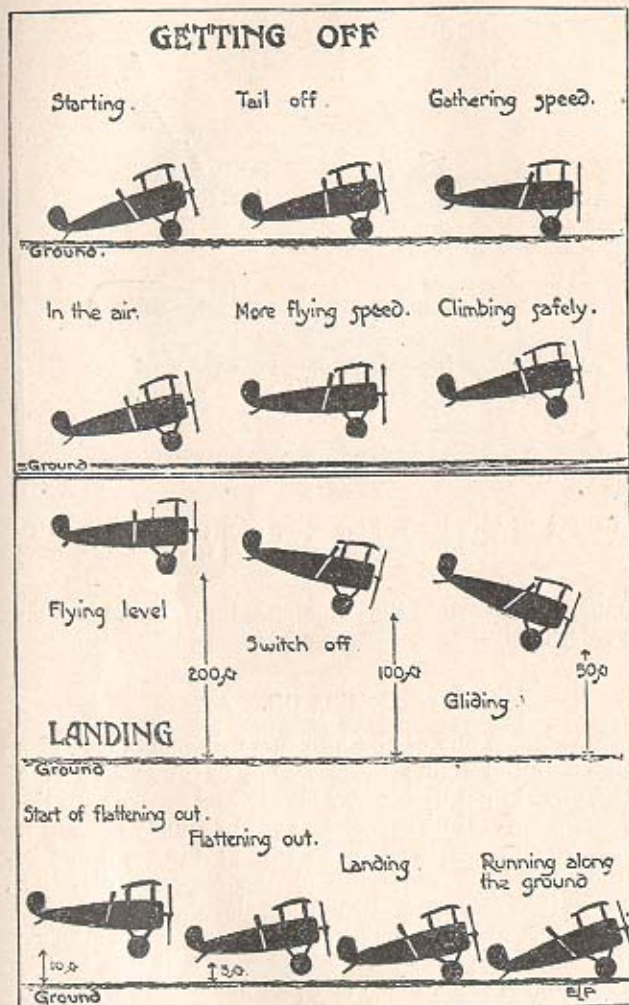

Getting off and landing. The movements of the control lever are indicated by the white line on the fuselage (exaggerated). It is of the greatest importance, both in getting off and landing, for the pupil to look ahead, so as to have some mark in view by which he can keep the machine straight.

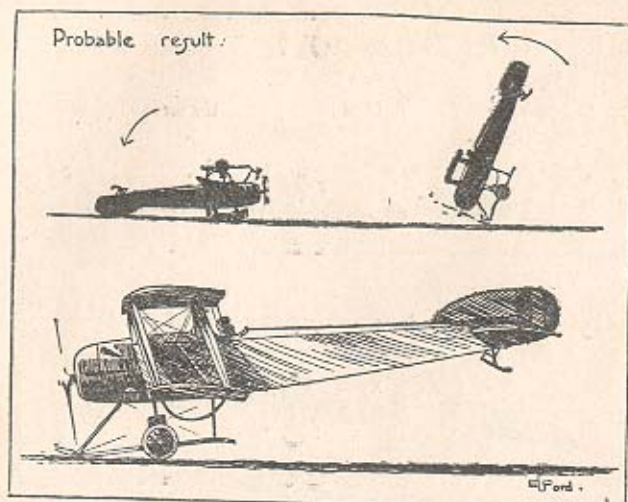


Getting off with the tail too high, with the possible result that the machine might turn turtle.

should make certain that he allows himself ample room in order to clear such obstacles as woods, trees, or sheds.

Getting Off.

Now comes one of the two more difficult parts of a pupil's initial flying experience—the start. It is a good plan to get under way slowly and to open up the engine gently, thus gathering speed gradually. Then, if the machine should tend to swing sideways it can be counteracted by ruddering in the opposite direction before the sideways swing develops into anything serious. A machine may swing sideways when starting for a variety of reasons. Sometimes it is due to the pupil, who is often liable to over-rudder on the ground until the machine is edging in the desired direction. This causes it to swing sideways further than intended. The rudder should be eased off as soon as the machine starts to swing in the required direction. This applies more particularly to fast machines. Another possible

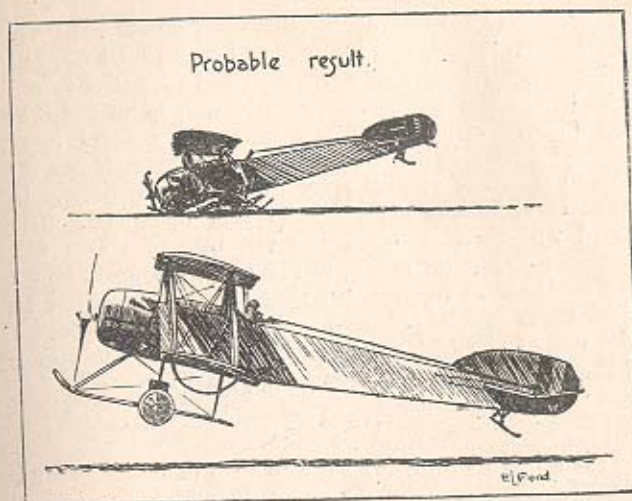

Getting off with the tail too low and without sufficient flying speed. Unless the control lever is immediately put forward, the machine will stall and crash.

reason for a machine swinging is that the pupil, in opening the throttle, which is placed on one side, may allow his foot to act automatically in conjunction with his hand, i.e., if he opens the throttle with the left hand he may push his left foot forward at the same time. When in doubt, it is a good plan to switch off altogether and to make a fresh start, unless the machine is already in the air.

Engine Economy.

It is desirable to get under way gradually. This saves the machine, which should at all times be treated as a fragile and very sensitive piece of mechanism. It is well, also, to throttle down the engine a little in the air, for it is never a good plan to run it "all out" at any time.

On a long flight it pays to throttle down the engine every now and then and to glide down a thousand feet or so.


The pupil starts by moving his stick forward slightly as he gains speed, and by getting his tail well up, but not too high, for, if on a tractor, the propeller might hit the ground, gathering speed gradually and slowly and almost imperceptibly pulling the control lever towards him. When he feels the machine in the air he can ease the control lever forward momentarily in order to allow the aeroplane to pick up speed. The speed will then increase, but the rate of climb will decrease. Generally, it is wise for a pupil not to climb the machine at its lowest flying speed, but rather to allow three or four miles an hour for possible mistakes. The use of the instruments which indicate the speed of the machine is described in Chapter VI.

Turning.

It is a bad plan at any time to turn near the ground because there is little air space in which to correct bumps, sideslips, or any other unexpected occurrences. It is wise, therefore, for the novice to keep straight on his course against the wind until he has attained a height of 500 to 1000 ft.; then he can make his turn.


When turning on school machines, where there is generally not a very wide range of flying speed or reserve of engine power, the nose of the machine should generally be put down slightly and the turn should be made at or slightly over flying level speed. Some instructors consider that the stronger the wind the more must the speed be kept up in turning. The reason for this, they say, is that in all turns a machine is inclined to lose height, and especially is this the case when turning down wind. Many pilots imagine that in turning down wind they experience a curious sloppy feeling in the controls, whereas they seem to detect a much firmer grip of the air when turning up wind. Much discussion and argument have taken place on this subject, but theoretically, at any rate, it should make no difference to the control of a machine whether it be turning up wind or down wind. How many pilots, for instance, could detect an up wind or down wind turn, if they could not see the ground, as would

be the case if they were flying above the clouds? It is wise not to rely too implicitly at any time on the air speed indicator. This is specially true when turning, the danger lying in the possibility of the pupil holding off the bank when turning down wind near the ground, more particularly with stable machines. Assuming that the air speed indicator is fitted in the vicinity of one, say, the left-hand, wing

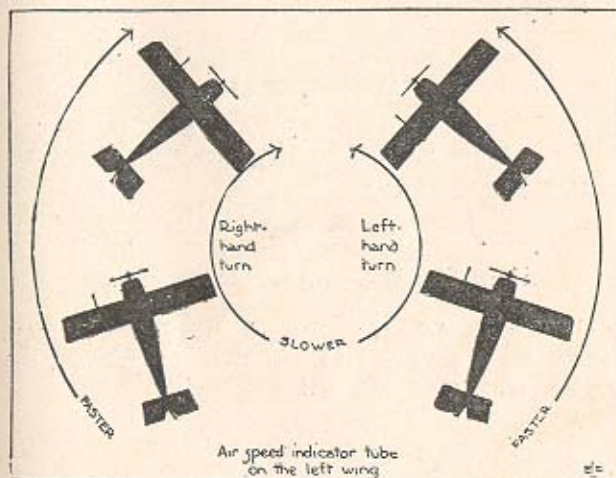

If the air-speed indicator is fitted to the left wing, on a right-hand turn it will register more than the mean speed of the machine. On a left-hand turn it will register less than the mean speed of the machine.

tip, as is the case on most tractors, then, in making a turn to the right, the left-hand wing is obviously travelling much faster than the right-hand one. Therefore the air speed indicator tube attached to the left wing is over-registering the mean speed of the machine. On the other hand, if a left-hand turn is to be made, the indicator is under-registering the mean speed. On tractor machines the air speed indicator is fixed to one side of the fore-and-aft centre line of the machine in order that it may not be interfered with by

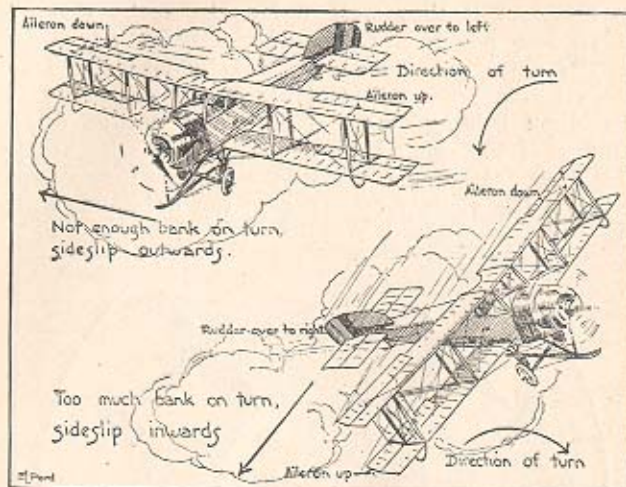

Incorrect turns, showing how sideslips occur.


the slip stream of the propeller, which is driven out past the fuselage of the machine. In pusher machines, the air speed indicator tube is fitted centrally.

Straightening Up.

In turning, a pupil should put his nose down slightly by moving the control lever forward. He should then push the rudder and control lever over together in the direction he desires to turn. When he wishes to fly straight again, he brings the rudder and the control lever back to the central position, or, in some machines, slightly over in the opposite direction, the opposite bank being applied first and the opposite rudder applied as the machine approaches a horizontal position: the quicker the turn the more rudder and bank are required. The controls are centred when the machine is level. He should never turn slowly, as this manoeuvre may result in a sideslip and stall, which means that the machine loses its flying speed and gets into a tail-down or cabré position.

The First Flight Solo.

The pupil has now attained the height of 1000 ft. or so and is flying down wind. He is comparatively happy, as, once in the air at a fair height, the control of the machine is a simple matter. There are, however, several pitfalls into which he may tumble if he is not careful. He must always have in the back of his mind the possibility of an engine failure necessitating what is known as a forced landing. With this in view, he should always, so far as is possible, be able to turn into the wind and land in the aerodrome. Consequently, pupils who fly low over woods, houses, or other obstacles are taking unnecessary and foolish risks. If any useful purpose were to be served by running such risks, then by all means let him take them; but otherwise such flying is unjustifiable and extremely foolish. A pupil should remember that it is only given to the average pilot to make two or three such mistakes in the air before meeting with a really serious crash, attended by broken limbs, or perhaps worse.

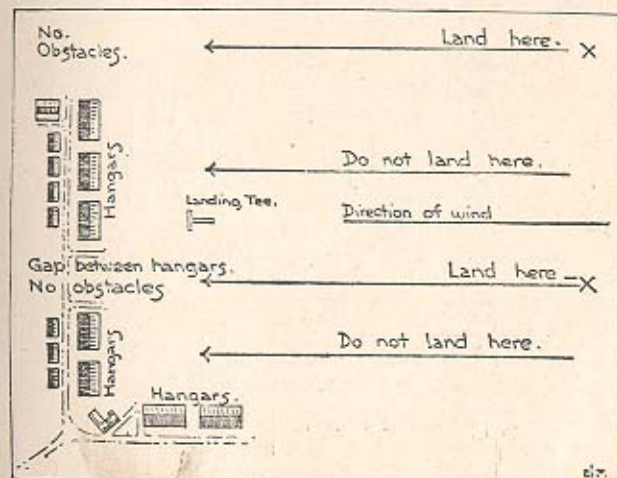


The landing ground of an aerodrome, showing where and where not to land. The same thing applies equally in getting off.


For the same reason it is a bad plan to point the machine towards woods, trees, hedges or buildings unless the pupil is absolutely certain that there is sufficient space to prevent him running into them in the case of an engine failure when starting, or to attain sufficient height first to enable him to turn round and land on suitable ground. In landing, too, he should allow himself as much room as possible for the run of the machine and should not head it towards obstacles, as he is likely to overshoot the mark considerably.

Flying Over Bad Ground.

In certain circumstances, as, for instance, in the case of a cross-country flight in misty weather, when it is impossible to fly high, it may be necessary to fly low in the vicinity of woods or other unfavourable landing ground. Where possible, these grounds should be flown round, if they are of great extent, instead of over them, as an engine failure, with the ensuing forced landing in a forest, is not an undertaking that a pilot relishes.

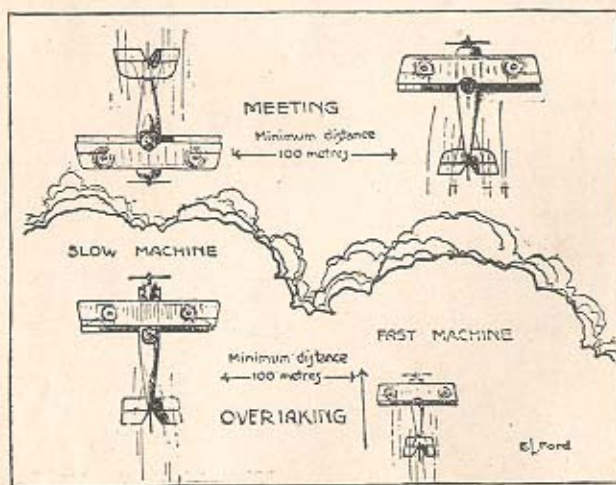

The rule of the air when overtaking or meeting another aeroplane.

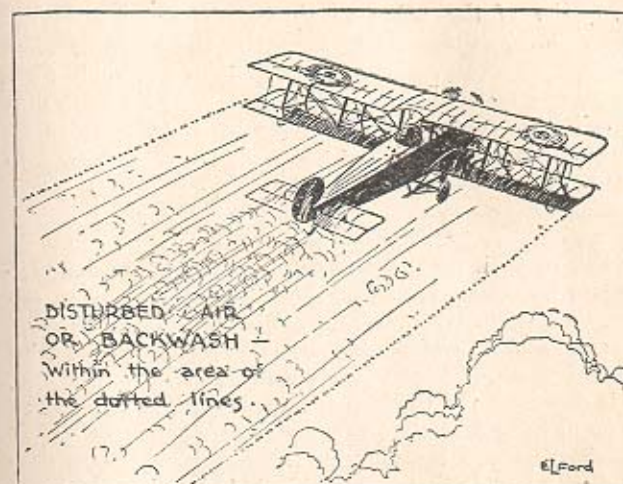

Points to notice when encountering another machine in the air, i.e., avoid flying or landing in the backwash of another machine, as the air in the wake of the machine is very bumpy.

although such landings have been made in exceptional circumstances without the pilot suffering so much as a scratch.

The Rule of the Air.

Whilst in the air a sharp look-out should be kept for other machines. This applies to all kinds of flying, but is particularly true at flying schools, where there is generally a large number of machines in a comparatively restricted air space. Usually, some set course is laid down, i.e., right or left-hand circuits, and pupils should familiarize themselves with the course to be adopted before going up. In the air, the "rule of the road," as laid down by the Royal Aero Club, is that one keeps to the right when meeting machines and steers clear when overtaking. When machines meet at an angle the pilot that finds the other machine on his right must steer clear. In flying near other machines, a pupil may encounter bumps set up by the

propeller of the other machine, but these need not alarm him, as it is a simple matter to correct or avoid them. For the same reason it is not advisable for a pupil to land behind another machine, as its wash may upset him considerably. In flying near airships he should beware of trailing wires. In fact it is well to avoid flying in the vicinity of these craft.

Discomfort of Bumps.

During their early flying experiences many pupils are apt to become alarmed at the bumps they find in the air. To begin with, these bumps may certainly seem strange and uncomfortable, but, in reality, a pilot with a good machine is absolutely safe in them. In flying, it is a question of the higher the fewer, and quite often a pupil may find that the first 500 ft. or 1000 ft. of atmosphere are bumpy, but at anything above that height the air is quite calm. Bumps have been known to occur at heights of 10,000 ft. or more, but this is very exceptional. It should be remembered that a bump under a wing will only put a machine into such a position as it frequently assumes when turning even at quite moderate banks. Bumps will often be found in the region of clouds, and sometimes, too, they may herald the approach of a thunderstorm.


Sometimes it happens that a pupil, on his first or second solo flight, may lose himself, in which case he has only himself to blame for not studying the lie of the land whilst under dual-control instruction. He should remember, however, that a machine flown solo will rise much more quickly than when two persons are carried, as in dual-control work, and, therefore, it behoves him to keep an eye on the height indicator or aneroid, and see that he does not get higher than he has previously been accustomed to. Again, it is inadvisable for him on his first solo flight to venture into the clouds, where he may easily get lost. He should also remember that, when flying down wind, he will cover the ground very much more quickly than when flying against the wind, which is another fact that may cause him to lose his bearings on his initial flight.

Landing.

There is now only the landing to be considered. The pupil knows already that he has to land against the wind, and not facing obstacles, such as woods or hangars. Moreover, he must not land over such obstacles, as they may easily put him off his straight glide to earth, which is the best kind of landing for him to attempt at present. He should know approximately at what height and at what position over the ground he should switch off or throttle down his engine in order to hit off the point on which he intends to land, and on reaching this position he should throttle down his engine fully. On most machines the throttle is set when closed so as to allow the engine to tick over at 200 or 300 revolutions per minute. He must put the nose of the machine down firmly and gradually until the desired gliding angle and speed are attained (this is generally about the average flying speed), and then watch the ground carefully. If there be other machines on the ground which baulk him, it is a wise plan to switch on and to make another circuit while the ground clears. If he overshoots his mark, owing to faulty judgment, or if he sees that he is going to under-shoot, it is a good plan to make another circuit, so as to give himself the best possible chance of effecting a good landing. In the latter case he could, of course, switch on his engine, and having gained the necessary distance by flying level in place of gliding, throttle down again, but this may put him off his glide and upset his calculations.

Assuming that he sees that he will hit off the landing ground correctly, he must watch the earth most intently, keeping up his correct glide, angle and speed all the while. When he gets within 20 ft. or 30 ft. of the earth he can begin almost imperceptibly to flatten out by manipulating the control lever in just the same way as that in which he took the machine off the ground a few minutes before. Still watching the ground intently about 20 yds, or 30 yds., or even more, in front of the machine, he continues to pull back the lever ever so

gently until he gradually decreases his flying angle, and, finally, as the machine loses its flying speed, its angle of descent is blended in the horizontal of the ground without the slightest jerk, and the machine comes to earth. In easing back the control lever, it may be necessary at times to pause momentarily, or even to move the stick forward slightly, if the backward movement has been made too suddenly, or too much, and has resulted in the machine being unduly held up, or even made to "balloon." The whole art of landing consists in

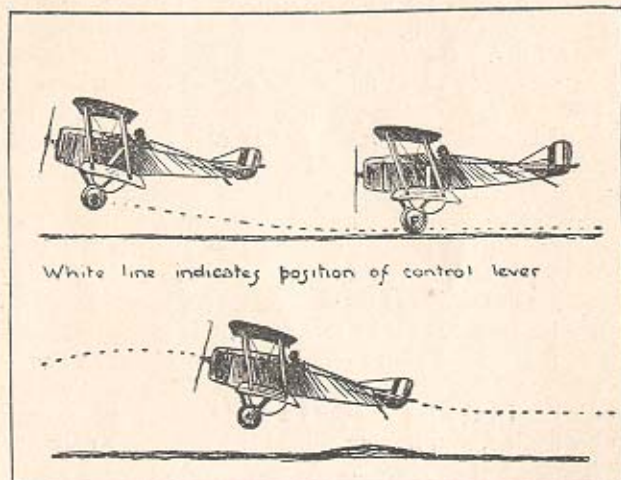

If the pilot makes a fast landing and pulls the stick back too quickly in order to get his tail on the ground, he will balloon, as shown in the upper illustration. If he makes a slow landing, he will be far more likely to land safely, even on bad ground. The lower illustration shows what happens when a machine, landing fast, strikes a ridge or uneven part of ground.

accurately timing the relative position of the ground and the machine by the eye working in perfect unison with the hand. The reason why the pilot must look ahead to land, and not directly beneath him, can be explained by reference to the fact that in a fast travelling railway train single sleepers on the track can

be seen if the observer looks ahead out of the window, whereas if he looks down beneath him the sleepers pass him in a continuous blur. So in landing; the further one looks ahead the slower the ground appears to be travelling, and vice versa.


A pupil must remember from his earliest flying experience that he must put the nose of the machine down if for any reason the engine stops or slows. Generally speaking, he will come to no harm through going too fast in the air, which simply means that he is going downwards; but he will easily get into difficulties if he tries to fly too slowly, which means that he is trying to climb the machine at an angle so great that there is not sufficient speed of air under the wings to maintain them in flight. He must also remember the importance of keeping the machine heading perfectly straight in the direction in which it is intended to land (this direction being determined at a height of several hundred feet above the ground), and of not allowing it to swing out of its course, either owing to bumps or to the necessity of having to use more engine.

Land on a Mark.

No pupil can expect to make a perfect landing at the first, nor yet the second attempt. It is all a matter of practice, and the best way to obtain proficiency is to practise landings. He can also practise landing on one particular spot in the aerodrome. By flying in a big aerodrome he is all too apt to allow the machine to land where it wants to, instead of making it land where he wants it. This tendency should be strenuously avoided, and the pupil, especially when he becomes more proficient in the use of "S" turns, should always fix on some definite spot on the ground where he intends to land, and then make his machine land as near that spot as possible. To begin with, he should not make his "S" turns too near the ground, but as he becomes more proficient he can turn lower and lower, always remembering that if he has plenty of speed on the machine he will also have plenty of control over it. The reverse is equally true.

Landing Mishaps.

There are two alternative faults in landing, one very much worse because it is more dangerous than the other. A pupil can either fail to flatten out and thus flies into the ground, in which case he probably

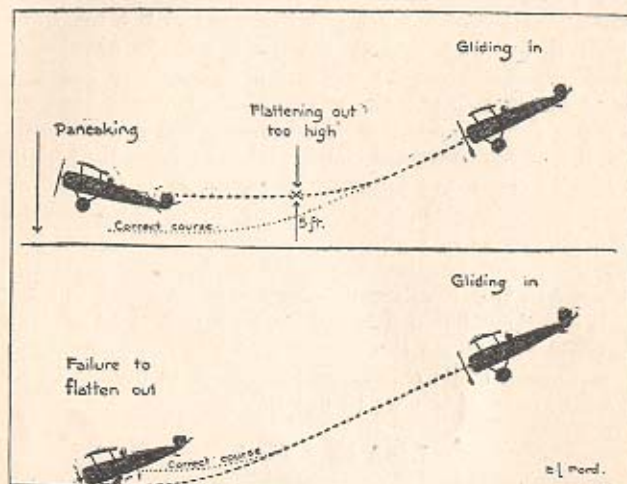


Bad landings. "Pancaking," result of flattening out too high; and the effect of omitting to flatten out, or flattening out too late.

smashes his machine in landing by turning it over; or he flattens out too much or too early. In the latter case a "pancake," or, if it be between 10 ft. and 20 ft., a "stall" results. A pancake means that the machine lands several feet up in the air instead of on the ground, and then, having lost its flying speed, it pancakes, or drops to earth. If the pancake is not very pronounced, no damage may be done, as the elastic shock absorbers on the under-carriage will take up a great deal of it.

When the machine has once landed the pilot should allow the tail to drop on to the ground of its own accord. He must not pull it back on to the ground, for if this is done the machine will often leave the

ground again for a height of several feet. In some machines the tail is purposely held up off the ground as long as possible.

A worse variety of pancake will result in a broken under-carriage, but no other damage to machine or

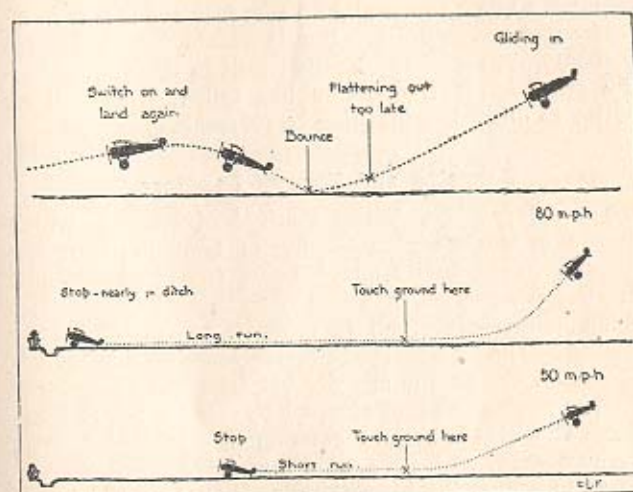

Preventing a bad landing by putting on the engine after bouncing. Fast and slow landings and their ultimate effect on the "carry" of the machine.

pupil. The worst form of pancake, which takes place when the machine loses its flying speed at a height of 20 ft. to 30 ft., often develops into a stall, which means that the machine loses its flying speed in mid-air, followed probably by a sideslip, when the machine crashes down on one wing and is hopelessly smashed. In this case the pupil may be hurt, although, if the height is not great, he may not be seriously injured, as the wings act as a cushion to the blow by breaking up and thus absorbing the shock. The only method of saving such a catastrophe is to put the nose of the machine down to allow it to regain its flying speed, or else put on the engine and so allow it to pull the machine out of its

precarious position: both these operations could only be performed by experts, as the air space is generally too small to allow of this evolution being performed successfully. An expert would get the machine to earth safely by putting the control lever forward and then moving it back again instantly; but the operation requires a quick touch and an accurate eye if it is to be performed successfully. Pupils should not try such a manoeuvre, as it will generally result in their flying into the ground. If the engine has failed, they will do better to allow the machine to pancake.

Bouncing and Bumpy Landings.

There is another faulty method of landing, which results in the machine leaping or bouncing over the ground, owing to its speed being too great when it touches the ground first and the angle of descent not being sufficiently small to allow it to run along the ground. The best method of counteracting this fault is to put on the engine slightly between the bumps and then to flatten out and attempt to make a better landing. This also is by no means an easy operation, even for an expert, whose machine may have been made to bump unexpectedly by striking a ridge of ground, or an unseen bank. If the pupil pulls back the control lever too quickly, when the machine still has flying speed, he will "balloon," or go up, and had better then put his engine on and try again after another circuit. On most machines an ideal landing would be to allow the tail skid and the wheels to touch the ground together. This is called a three-point landing and indicates that the machine has been held off the ground up to the very last moment.

In landing, it is always good practice to come down slowly and to attempt to strike the ground at the lowest possible speed in conjunction with safety. This does not mean that it is advisable to glide as slowly as possible, as this is dangerous practice, and if turns be attempted on a glide of this kind a stall may result. Instead, it means that when the machine is within 15 ft. to 30 ft. of the ground the speed may be cut down


so that the velocity is as low as possible near the ground. The advantage of this is that the run, or the carry, of the machine when it has once landed is considerably reduced, which assists the pilot in making a landing in a small field. If he landed very fast his carry would be further, and there would be more chance of his running into obstacles or turning over if he had to land on soft ground.

Some pupils, when they see that they are going to overshoot the mark, instead of making another circuit and profiting by their previous mistake, attempt to hit off their landing place by bringing the machine down at a much steeper angle than its ordinary flying speed. This is a common fault and is quite ineffectual, because the machine will have gathered so much extra speed on its descent that it will lose its flying speed much more slowly when flattened out, and will glide across the aerodrome and finally run into a hedge or dyke at the other end owing to its increased momentum.

Taxying.

The last point in aerodrome flying, and by no means the least important, is the manipulation of the machine in taxying. This means driving the machine on the ground and steering it with the rudder. Sometimes the ailerons are also worked, but in the opposite direction to that adopted in the air, i.e., the control lever is moved to the left if it is desired to turn the machine to the right; the right aileron comes down and acts as an air brake on that side, so that the machine turns about that wing tip. Taxying should always be done slowly, especially on bad ground, as much damage can be done to a machine by rough or careless handling.

When it is desired to turn the machine on the ground it is sometimes advisable to get up a little speed, raising the tail of the machine by putting the control lever forward and then ruddering in the desired direction. On some machines the rudder and tail skids are interconnected, and, in consequence, the machine can be steered on the ground with the greatest accuracy and ease. If a machine repeatedly swings sideways when

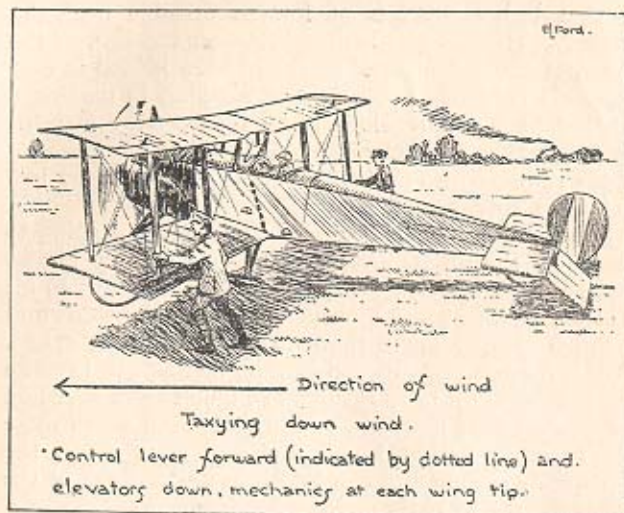

Taxying down wind. In taxying down wind, keep the control lever central or a little in front of central, so that the wind cannot get under the elevator and overturn the machine. In landing in a strong wind, wait for mechanics to hold down the wings before taxying back to the shed.

landed or being taxied, the undercarriage is probably out of line with it, and must be trued up. When taxying over heavy or rutty ground it is a good plan to hold the control lever well back so as to keep the tail of the machine on the ground. When taxying across ruts an excessive amount of engine should never be used, for if this is done and the tail of the machine be up, there is an excellent chance of the whole aeroplane falling over on its nose. In windy weather it is sometimes very difficult to control the movements of the machine on the ground, in which case it is always advisable to order two mechanics to hold the wing tip struts and escort the pilot back to the sheds, or out to the starting ground, as the case may be. In taxying down wind keep the stick forward so that the wind cannot get under the elevator, which is down, and so blow the machine on to its nose.

Obtaining a Pilot's Certificate.

When the pupil has made one or two successful flights he may wish to qualify for his pilot's certificate, which is issued by the Royal Aero Club of Great Britain and Ireland. His instructor will provide him with the necessary forms, which he has to fill up and forward, together with his photograph and the sum of £1 1s., to the Club, whereupon his name will be placed upon the list of pilots, and he will receive his brevet or ticket, which resembles a motorcar licence, and is useful to take with him on cross-country flights, where it can always be used as a reference or proof of identity. The address of the secretary is 3, Clifford Street, New Bond Street, London, W. 1.

The test imposed before the certificate is issued is a simple one. The pilot must make two solo flights and execute a certain number of figure-of-eight turns in the air. He must also land with his engine cut off from a height of 100 metres, whilst on the first part of the test he must land within a certain distance of two marks on the ground. It does not follow, however, that because a pupil has taken his ticket he is an expert aviator. The ticket flight is the simplest possible test, and he still has a long way to go before becoming a qualified pilot. The chapters that follow will show that this is so.

CHAPTER VI.

The Use and Working of the Instruments.

ALTHOUGH it is quite possible to fly well and accurately without using instruments, they are often useful for verifying one's position in the air and finding the way across country.

The instruments generally found on school machines are the compass, air speed indicator, height indicator, sideslip indicator, fore-and-aft level, engine revolution counter, watch, petrol gauge, pulsator glass or sight-feed oil dome, and the pressure gauges for the oil and petrol supply. There is also the map carrier. These instruments and fittings should, so far as possible, be grouped together so that they can be seen by the pilot with as little deflection of his eye from the horizon as possible. Generally, a total weight of about 15 lb. or 20 lb. is allowed for the complete equipment.

Illuminating the Instruments.


As the instruments may be used at night, some way of illuminating them must be employed. Generally the indicator fingers and the figures on the dials are painted with luminous paint so that they can be seen in the dark. It is also quite usual to find a small electric-lighting set with battery incorporated in the design of the instrument board, with a switchboard for switching on a hooded light to any or all of the instruments it is desired to read. Each is shielded to prevent the pilot's eyes from being dazzled, and can be switched on independently of the others when desired.

Some notes on the instruments chiefly used on school machines will be of interest. Every endeavour should be made to find out not only how they work and how to use them, but what failures are likely to occur and how they can be most quickly put right.

THE COMPASS

The Compass.

The magnetic compass is a most important addition to any aeroplane intended to be flown across country. It should be placed in full view of the pilot in the fore-and-aft line of the machine when in the flying position. With the tail of the machine raised several feet from the ground, the compass should be set perfectly level, both laterally and fore and aft. The magnetic com-

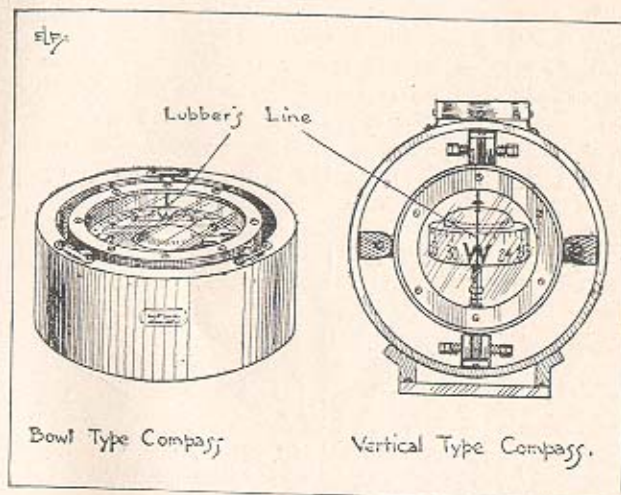


The compass. Two typical types of aeroplane compasses. Left: The bowl pattern. Right: The vertical type, which is read from the back.

pass is an instrument for indicating the magnetic north, as the red end of the magnetized needle to which is attached the compass card always points to the magnetic north, unless affected by magnetic material near it on the ground or carried in the aeroplane. The compass card is pivoted at a point so that it is free to revolve in the horizontal plane. To damp out vibration it is immersed in a mixture of distilled water and alcohol (two parts alcohol to three parts water) contained in a kind of bowl, made of some non-magnetic metal, with

a glass top or side to it, through which the pilot can read the bearing on the card. A mark is painted on the body of the compass, outside the bowl, in the direct fore-and-aft line, both of the machine and of the compass. It is called the "lubbers' line." As the compass card rotates, caused by turning the machine in the air, the figures on it register with the lubbers' line, and give the pilot the direction in which the nose of the machine is pointing from time to time.

The compass card is circular and is divided into 360 degrees. The marking of the card is carried out clockwise; i.e., N. = 360 degrees or 0 degrees; N.E. = 45 degrees; E. = 90 degrees; S.E. = 135 degrees; S. = 180 degrees; S.W. = 225 degrees; W. = 270 degrees; N.W. = 315 degrees; and N. = 360 degrees again. The lubbers' line, as well as the figures on the compass

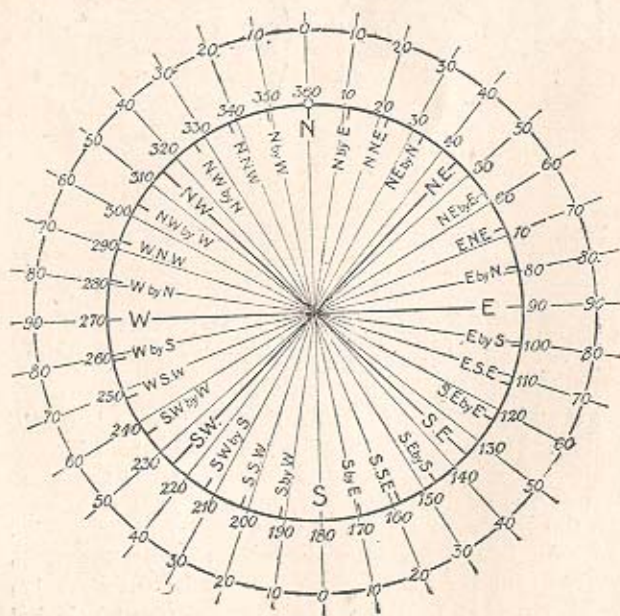

The dial of a compass

card, being painted with luminous paint, can be read in the dark. The cardinal points are N., S., E. and W.; the quadrantal points are N.E., S.E., S.W. and N.W. It is worth remembering that each degree contains 60 minutes (denoted 60'), and each minute contains 60 seconds (denoted 60'') of an arc. One point of the compass is equal to $11^{\circ} 15' 0''$, which means 11 degrees 15 minutes, so that there are 32 points in the compass. (See sketch on page 90.)

Compass Error.

If the compass needle is not affected by local magnetic material in an aeroplane, its red end will point to magnetic north and its blue end to magnetic south. The angle that the needle is deflected from true north is equal to the magnetic variation. The angle that the needle is further deflected from magnetic north by magnetic material carried in the aeroplane is called deviation. The total error of the compass needle from true north caused by variation and deviation is called the compass error. Compasses must be swung from time to time to test their accuracy, as is explained in Chapter VIII, or if magnetic material is added to the aeroplane, in the shape of machine guns, bombs, tool-kits, etc., it will cause the needle to deviate from its correct angle. This error can be corrected, to some extent, as explained on page 127, by inserting small magnets in little holes provided for them in the fore-and-aft line, and also athwart the compass. On some compasses will be found a small wooden box fitted to the underside with holes for the accommodation of correcting magnets, while in others the slots for the magnets will be found on the top of the compass.

A common trouble with compasses is caused by a bubble forming in the liquid. To extract this the filler plug must be removed from the bowl, the bubble brought up into the plug hole, and distilled water added until the bowl is brim full. A fountain-pen filler or glass tube which will allow the bowl to be filled drop by drop may be used for the purpose. To counteract the expansion of the liquid due to changes in tempera-

ture, a small chamber of thin metal, capable of expanding and contracting slightly, is connected to the compass bowl by a small passage through which the liquid has access to the expansion chamber. Sometimes a bubble can be removed by pressing the expansion chamber when filling the bowl through the plug.

Great care is taken in compasses to insulate them from vibration. Sometimes the bowl is allowed to rest on a horsehair pad in a metal cup. It is also provided with rubber or felt shock absorbers, which assist in damping out the vibration and making the card easy to read.

Compass Spinning in a Cloud.


The compass is an extremely reliable instrument, and pupils should accustom themselves to steering by it and learning to study its reading. If the compass card begins to spin when the machine is in a cloud, for instance, it is a sign that the machine itself is turning and not the compass card, the north point of which is always trying to point to the magnetic north as the machine is turning round. Sometimes the compass card can be used as a lateral level, for unless it is lying parallel to the horizon it shows that the machine itself is tilted. In the same way it can be used as a fore-and-aft level.

In some compasses the card is designed to be read on its side instead of from above. For this purpose it is attached to the rim of a flat float inside which the magnetic needle is carried. The float is pivoted, and the marking of the compass card, being on its rim, can easily be read as it changes its position. This type of compass is read from the back, and the figures omit the final "0" in the bearings for the sake of clearness. Thus, when the compass card reads 27 against the lubbers' line, which is also at the back of the instrument, the nose of the machine is pointing 270 degrees. The card, which is in the form of a vertical band round the rim of the float, is painted red and blue to represent the northerly and southerly semi-circles. This type of compass is used a great deal on modern aircraft, and


pupils would do well to familiarize themselves with its design and mechanism, as it is rather different from the more ordinary and older patterns, in which the compass card lies flat and is read from above.

The Air Speed Indicator.

The air speed indicator is an instrument used to inform the pilot of his speed through the air and not over the ground. It consists, roughly, of two parts—the instrument and the Pitot tubes. The tubes are fitted to the leading edge of the top wing, generally to one side of the central fore-and-aft line of the machine, so as to be out of the way of the slip stream of the propeller, which would cause faulty readings. On a pusher or a double-engined machine, with the engines placed one on each side of the centre line, the tubes could be fitted centrally, as the propeller draught would not affect them. There are two tubes arranged either side by side or concentrically, one inside the

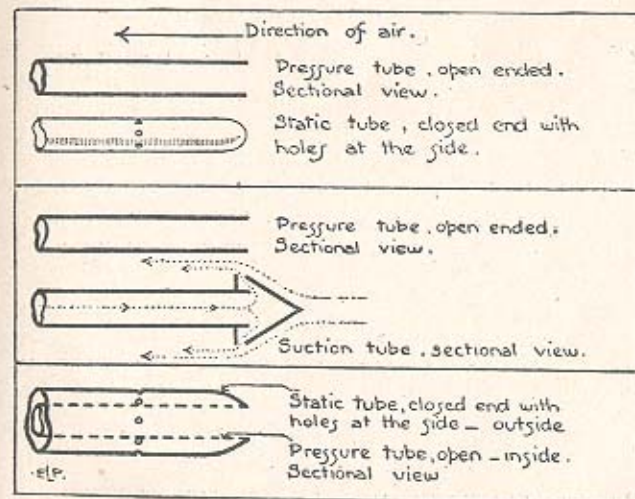

Aeroplane instruments. Pressure and static tubes used in conjunction with the speed indicator. The arrangement is known as the Pitot tube.

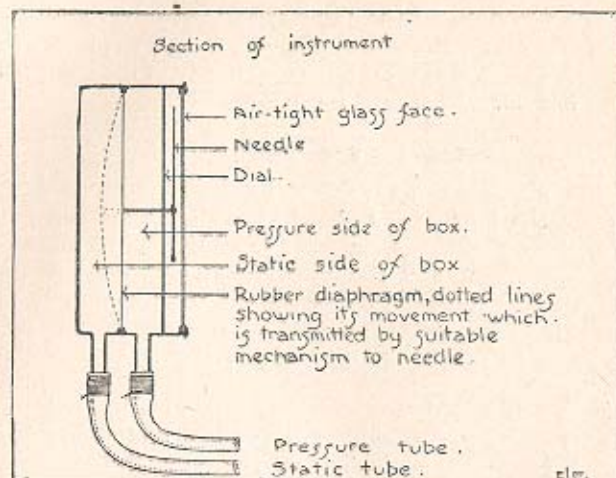

Aeroplane Instruments. Section of air speed-indicator box, showing the rubber diaphragm and pressure and static sides of the instrument.

other. (See sketch on page 93.) One tube has its end open to the air and the other has its end closed, but is provided with a ring of small holes in its side, or, in the case of the concentric tube, the inside tube has its end open to the air, whilst the outside one, with the holes in it, has its end tapered down and soldered to the inner tube. The first tube registers the pressure of air meeting it and rushing down the pipe leading to the inside of the instrument, which is enclosed in an air-tight case. In this case is a rubber diaphragm, which is compressed by the force of air created by the passage of the open-ended tube through the air when the machine is in motion. This tube is called the pressure tube. The other tube is connected to the underside of the rubber diaphragm which divides the instrument box into two airtight compartments, and transmits the pressure of the air at rest to this side of the diaphragm; thus a balanced result, or reading, is obtained. The difference in the pressure in the two tubes is proportional to the square of the velocity. Air speed indi-

cators under register with height, and to correct this error a simple method is given. Multiply the reading of the air speed indicator by the reading of the altimeter in the number of thousands of feet and divide by 60. This answer is the correction to be added to the reading of the air speed indicator. Example: Air

speed indicator registers 100 m.p.h. at 6000 ft. $\frac{100 \times 6}{60}$

= 10. Therefore the true air speed at this height is 110 m.p.h.


Faults in Air Speed Indicator.

The up-and-down movement of the side of the diaphragm is conveyed by minute and very delicate mechanism to a needle, which works round as a pointer on a dial marked off in miles per hour or knots. Generally, the lowest reading given is about 40 m.p.h. and the highest 160 m.p.h. To secure the correct functioning of the instrument, the following points are of importance:—(1) The tubes should be pointing straight against the air stream when the machine is in the flying level position: if they are canted up or down they will, obviously, give a faulty reading. (2) There must be no air leaks in the connections between the Pitot tube and the instrument. (3) Rubber joints are used in several places, and these should be properly secured by copper wire, not crossed or kinked, and should show no signs of perishing. These rubber joints are used so that the water which might accumulate in the metal tubes may be drained off when desired. (4) The instrument itself must be airtight, and for this reason a rubber packing washer between the glass cover and the body of the instrument must be properly fitted and the two parts screwed well home. Sometimes a careless mechanic may connect up the tubes vice versa to the instrument, or cross them at one of the rubber joints, so that an erratic reading will result. On most instruments the unions for the correct tubes are marked: P = pressure, or open-ended, tube, and S = static tube. It is never advisable to blow through the


tube, as moisture from the mouth may get into it. The system can be tested better by sucking through the tube and then closing the open end and seeing if the needle moves. If it does, there is a leak in the instrument or tubes.

The Height Indicator.

The height indicator is operated by the pressure of the air, and is affected by variations of temperature. It consists of a dial marked off in hundreds and thousands of feet from zero to 10,000 ft. or 20,000 ft., depending on the scale and the type of work for which it is intended. The dial can be set to zero by turning a milled ring. This would be necessary after a fall or rise of the barometer, which would upset the reading of the indicator. It would also be necessary, in the case of the machine being transferred from one aero-

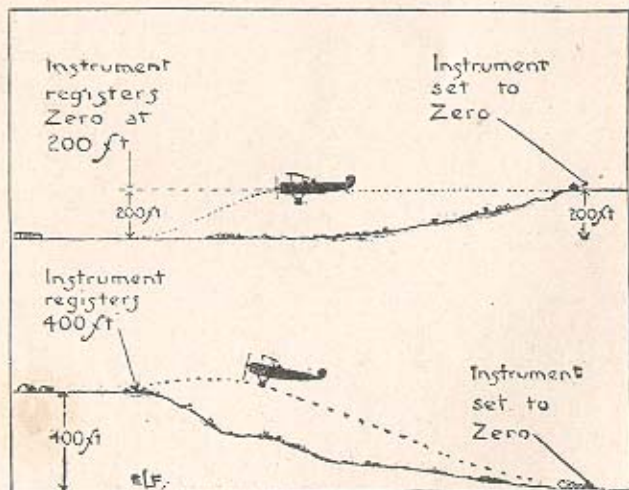

Two cases in which the height indicator might mislead the pupil. The height indicator only registers the height of the machine above its starting point, so unless the ground over which the pupil flies is level with his starting point, the indicator will not be accurate.

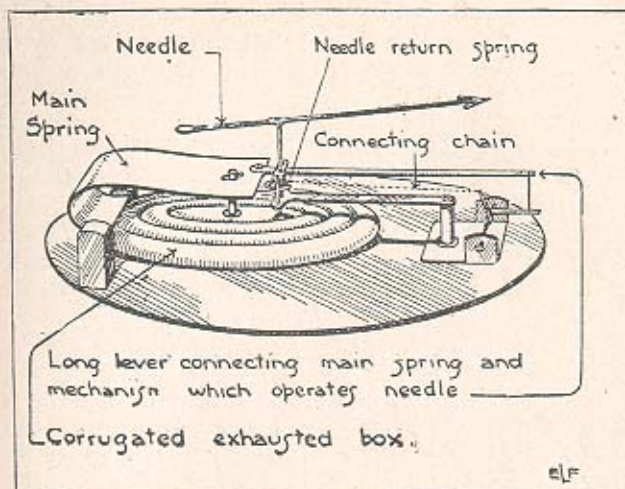

Aeroplane instruments. Mechanism of a height indicator.

drome to another, when the latter is either higher or lower than the former. The height indicator is always set to register zero at the ground-level where the machine is stationed, and it does not register sea-level unless a special compensation is allowed for between the height of the aerodrome and the mean height of the sea. The height indicator is simply an aneroid barometer. The indicator needle is connected by suitable and very delicate mechanism to an evacuated circular metal drum with corrugated top, which expands as the air pressure diminishes with height and actuates against a spring. It contracts again as the pressure increases, the spring transmitting the movement to the needle. As the metal of which the box is made is very thin, the pressure of the air tends to make it collapse altogether. This is prevented by fastening the bottom of the drum to the bottom or bed of the instrument, and the top side to a spring. As explained, the pressure of the atmosphere in the box compresses it against the spring, from which the movement of the box is transmitted by suitable mechanism to the

indicator needle. The dial of the instrument is calibrated correctly in feet, so as to give approximately correct readings of the amount of expansion or contraction of the exhausted drum. With both air speed indicator and height indicator there is a very considerable lag in their action, so that a reading of both instruments must only be taken as approximate at any given time. Height indicators give very little trouble in operation, but it is advisable, when anything goes wrong with them, to send them to an expert for repair rather than to tinker with their delicate internal mechanism.

Contouring a Flight.


A barograph, or recording barometer, is sometimes used as a height indicator to show graphically the course taken by a machine in flight. The paper on which the recording needle writes is graduated vertically for this purpose in feet, instead of in millimetres or inches of mercury, and horizontally in hours and minutes. It is situated on a drum driven by clockwork and made to revolve very slowly. If a pilot winds up the clockwork in starting he will be able, at the end of his flight, to see his up and down course through the air, to work out how long it took him to climb to such and such a height, and to note whether his rate of climb and glide was constant. He can also tell at what height he was at any moment of his flight. These recording barographs are sometimes used by pupils undergoing height tests, or when making cross-country flights, and a great deal of useful information can be deduced from the study of the completed chart of a flight. When a large number of these charts have been made, the instructor can use them to judge the skill of various pupils in climbing or gliding. A steady climb to 10,000 feet is indicated by a steady line, but if the line on the chart goes up in jerks or steps it shows that, for some reason or other, the pupil did not climb steadily, or else did not get the best results out of his engine whilst performing the test.

Trouble with barographs may be caused by friction

between the pin and paper, or in the levers actuating the pointer. If the chart shows a number of quick, jumpy lines, friction in the mechanism is indicated.

The Sideslip Indicator.


The best sideslip indicator is undoubtedly provided by a simple piece of string or tape fastened to a strut or cross bracing wire of the machine in view of the pilot. It is allowed to fly back by the forward motion of the machine in the air. When the machine is flying straight, or being turned with a correct amount of bank, the string will continue to trail straight back dead in the fore-and-aft line of the machine. If, however, it tends to trail out sideways, either one way or the other, it indicates a sideslip in the direction away from which the string is trailing. Thus, if the string is trailing out to the left from its anchoring point on a left-hand turn, it shows that the machine is slipping to the right or outwards. If, however, it is trailing to the left on a right-hand turn, it indicates an inward sideslip

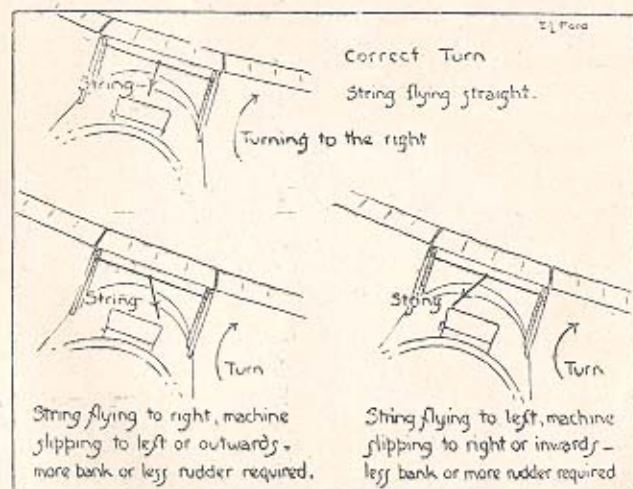

Movements of the string sideslip indicator, which show whether turns are being made correctly.

to the right. The pressure of the wind noticed by the pilot on his cheeks should also tell him that he is making a faulty turn. Wind on the right cheek on a right-hand turn indicates an inward sideslip to the right; wind on the left cheek in similar circumstances would indicate an outward sideslip to the left.

The cross spirit level is also used as a sideslip indicator. It consists of a bowed tube, filled with a mixture of alcohol and water to prevent it freezing. When the machine is flying horizontally level the

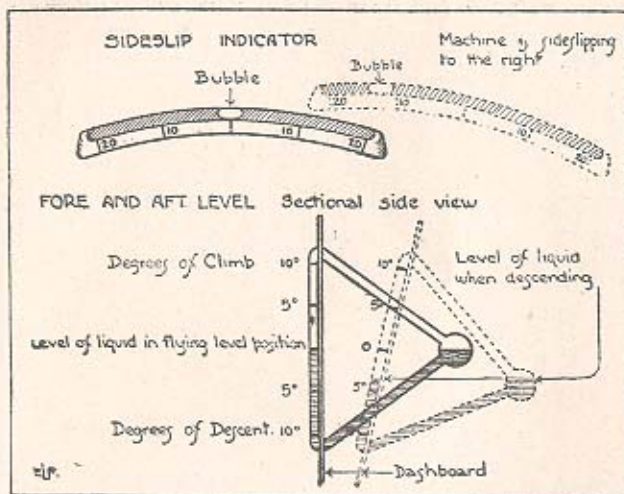


Aeroplane instruments. The sideslip indicator and fore-and-aft level. A non-freezing liquid such as alcohol is used in both instruments.

bubble is in the centre of the level, which is marked 0°. When a wing drops, the bubble moves away from the low side; but on a turn correctly executed it will remain central, as the centrifugal force, which tends to throw the liquid outwards, will have been balanced by the correct amount of bank. If the bank is too small for the turn, the bubble will travel to the inside of the turn as the centrifugal force will cause the liquid to fly out-

wards. The remedy in this case would be more bank or less rudder. If the bank is too great, the bubble will go to the outside, while the liquid slips inwards. The cure is to put on more rudder or to decrease the bank. These remarks apply to all moderate turns, banked up to 45 degrees, and for all turns correctly executed, however steep, the bubble should remain central in the cross level. The use of this instrument in the air is much more likely to muddle beginners than to be of assistance to them. It is far better for them to learn to fly accurately by sight and feel or touch of the machine than to fly by the use of instruments, which, although useful as a means for checking the accuracy of their judgment in flying, are liable to mislead them and to break down.

Horizontal Sighting String.

Some pupils have been materially assisted in their early flying by fitting a string stretched horizontally level across the machine dead in their line of sight. This horizontal sighting string, when compared with the horizon, assists a pupil to maintain his machine laterally level. Unless the sighting string is parallel with the horizon, the pupil knows that he is not flying laterally level. If the string dips below the horizon to the left, he is obviously flying with his left wing down, and he must move the control lever to the right to pull the wing up, centring it again as the machine comes up level. Assuming that when the machine is flying level in the fore-and-aft line the string is set to be dead on the horizon, from the pupil's point of view, the pupil can see in a moment if he allows the machine to get its nose down or to climb. In the first case the string will drop below the horizon, whilst in the second it will appear to rise above it. It has been found a great help to the pupil to have the sighting string dead in line with his eye, as otherwise he would have to judge his position laterally and fore and aft by comparing the nose of his machine and the underside of the top plane with the horizon. This double comparison is too much for the beginner, who finds it difficult to

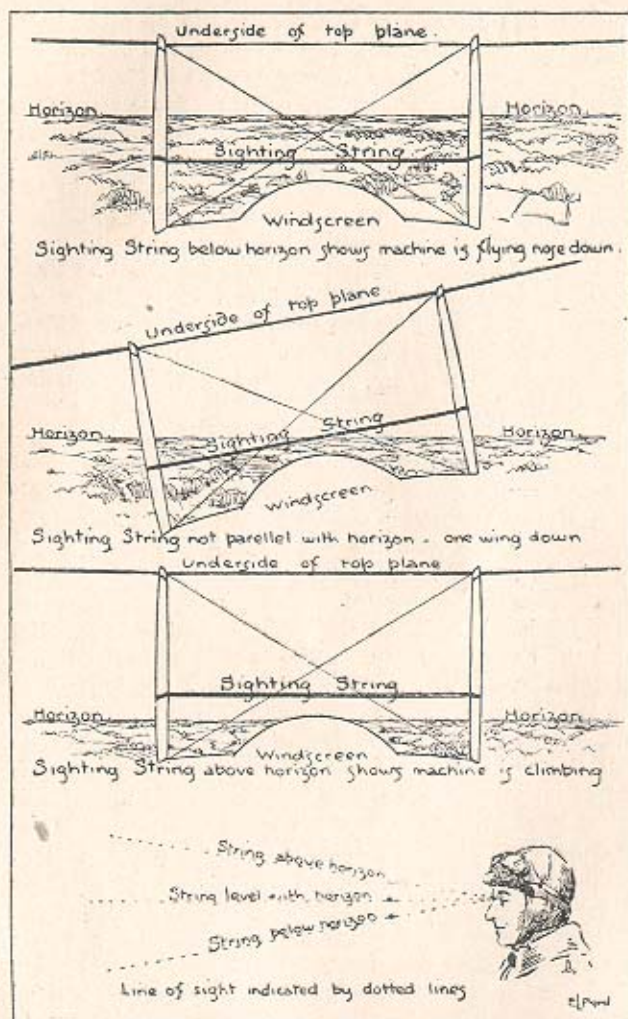

The uses of the sighting string for determining if the machine is flying horizontally or laterally level, if the machine is climbing, flying level or descending. For preference, the string should be set to be dead in line with the pupil's eye and the horizon when the machine is flying level.

gain any idea as to the position which the machine is assuming in the air, whereas with the string he has only one point to keep in mind. The fitting of the string also teaches him to look out ahead of his machine, which is the proper direction in which to concentrate, instead of looking at instruments or aimlessly watching odd pieces of ground, sky or machine that may attract his attention from time to time, which, until he becomes very much more proficient, cannot possibly assist him to keep the trim of his machine correct.

The Fore-and-Aft Level.

The fore-and-aft spirit level consists of a triangular tube with a bulb in the apex of the triangle, which is set at the back of the instrument board. The front of the level is graded in degrees and lies flush in the dashboard, the liquid being arranged to register 0° in the half-way position when the machine is flying level. When the machine is climbing, the liquid rises in the glass, and when the machine descends it recedes. This level is only useful in so far that it tells the pilot the degree of climbing angle of which his machine is capable under any particular set of conditions of engine power or load. Unlike the air speed indicator, which will always allow him to know if he is flying within safe limits (it does not matter whether his engine is on or off, or what the load is), the fore-and-aft level cannot be used for this purpose, as a machine might be able to climb at a certain angle with the engine running all out or with a light load, but it could not reproduce this performance with a failing engine or full load. Thus the pupil should not depend upon the fore-and-aft level too much as a means for telling him his position in the air, i.e., if he is climbing, flying level, or descending. If he noticed that he was flying level under any particular set of conditions with the fore-and-aft level registering at a certain mark, he might attempt to keep the level at the same mark if he ran into a big cloud unexpectedly. Even then his air speed indicator would probably give him a better idea of his fore-and-aft position than the fore-and-aft level itself.

The Engine Revolution Counter.


The engine revolution counter can be driven off the crankshaft, the camshaft, or the pump shaft of the engine. Providing that a correct gear ratio is interposed between the shaft on the engine and the flexible shaft of the indicator, it will indicate the actual number of revolutions of the engine per minute. Like other instruments, the needle and figures on the dial are often treated with luminous paint so that they can be read in the dark. The dial is arranged according to the speed at which the engine runs. It may be graduated from 500 r.p.m. to 1500 r.p.m., or up to 2000 or more r.p.m. if the engine is a high-speed one. The chief troubles with revolution counters occur owing to the breakage of the flexible shaft, or the pin coupling at the engine, pump or countershaft connection breaking or coming adrift. Sometimes oil will work its way up the flexible shaft and cable and enter the instrument, where it will cause the hand to stick. The cure is to clean both the flexible shaft, the cable and the instrument with petrol. Revolution counters work either by centrifugal force or electrically. If the internal mechanism breaks down, the instrument must be returned to an expert for repair. In the event of any of these instruments failing in the air, there is no immediate need for the pupil to land.

The Watch.

A watch is always a useful instrument in an aeroplane. It should have illuminated fingers and figures and be well insulated from vibration. This is done by placing it in a felt-lined case. A watch being valuable not only to aviators, it is advisable for it to be secured to the machine, or else to remove it when not required, as in the case of a machine being left out in a field all night, for otherwise, when the pilot returns, he may discover that someone had appreciated the value of the instrument and appropriated it for his own use.

A map carrier can consist either of a leather case with a celluloid cover through which the map can be

read, or else of a flat tin or sheet aluminium box with a roller at each side. In the latter case, clips are arranged to grip the map in each roller. The map must be cut to the correct width so that the carrier can accommodate it, and is then wound on to one roller and secured to the other. By turning the roller, the map is gradually unwound underneath the celluloid cover, which has to be removed to fit the map into the case, and stretch by stretch becomes visible to the pilot's eye. The principle on which this type of map carrier works is similar to the mechanism for winding up a

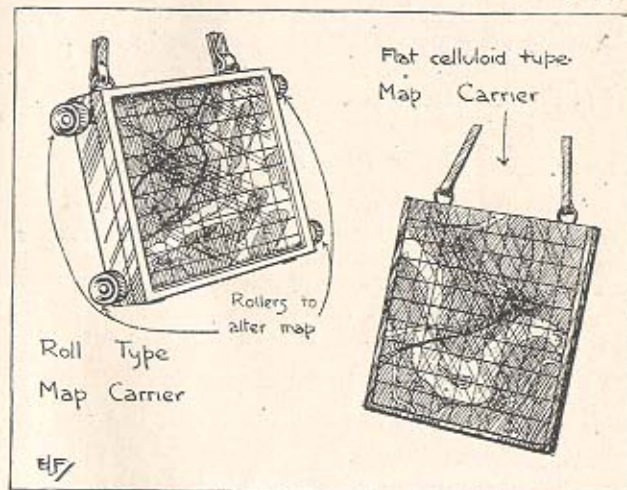

Two kinds of map carrier used for cross-country flying.

Kodak film. It is chiefly useful when a long stretch of country has to be flown over where the course to be travelled is too great to be viewed easily on one map, and the one sheet may not cover the one journey. Several map sheets can then be gummed together and cut so as to form one continuous stretch. The map case is carried slung round the neck by a piece of tape, but the pupil must be careful to see that it does not foul his controls, as it may do if it were left to dangle freely, or if it were hung up on the machine.


Petrol and Oil Gauges.

The petrol gauge consists of a vertical glass tube connected to the petrol tank by short lengths of pipe at the top and bottom. A tap can be fitted between the gauge and the tank, in which case the gauge will only register when the tap is turned on. The petrol takes up the same level in the gauge as in the tank, so that the pilot can see exactly how much petrol remains. He should remember, however, that, as the gauge will probably be fitted in the back of the tank, the reading will only be accurate when the machine is flying level. When the machine is climbing steeply the petrol will mount up at the back of the tank and in the petrol gauge, giving a reading in excess of the amount carried. When the machine is descending the reverse occurs.

Fitting Nuts and Bolts.

A point in connection with the arrangements of taps worth noting here is that they should always be designed to hang down in their running position. There will then be no chance of them closing themselves unexpectedly owing to vibration in the air. In the same way, the bolts should always be put in with their securing nut underneath, so that, in the event of the nut falling off, the bolt will still remain in position. In cases where bolts are put in horizontally, and not vertically, the head should always face the direction of flight where possible, so that, should the nut come off, the tendency of the bolt will be to remain in its socket.

The sight-feed oil pulsator domes, used on most rotary engines of the Gnome type, are connected to the oil pipe between the pump and the crankshaft. As the pump discharges a small amount of oil at each stroke of the engine, the force of the pulsation is also transferred to the oil in the oil pulsator dome. The oil rises slightly and then falls again. If the gear ratio between the pump and the engine is known, it is possible to calculate the number of engine revolutions by timing the number of pulsations per minute in the glass dome. In the Gnome engine the pump shaft turns at $7/4$ of

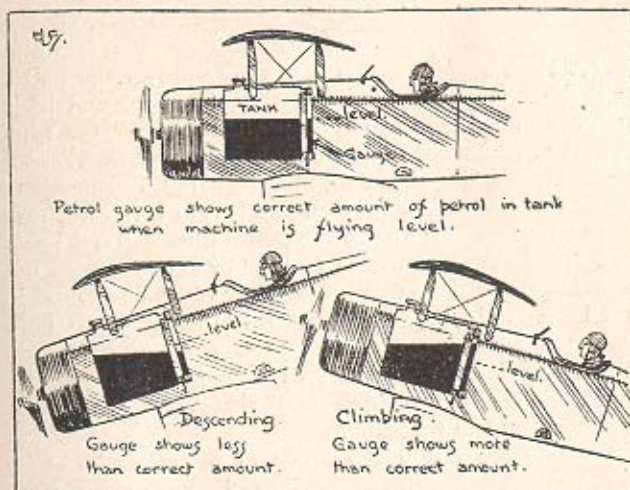

Petrol and oil levels, showing why the petrol and oil gauge fitted to the back of a tank may mislead the pilot as to the amount of fuel remaining, unless he is flying level when he reads the gauge.

the speed of the engine, while in the Renault engine the pump shaft turns at $2/7$ of the speed of the crankshaft. There is no pulsator gauge in the Renault or R.A.F. engines, which are commonly used in school machines. An ordinary pressure gauge is often fitted instead. When the oil is cold and the engine just started up the pressure will be seen to rise, but after the engine has been running for seven or eight minutes it will drop gradually to its normal mark.

Pressure Feed.


A similar gauge is used in connection with pressure-fed petrol tanks, into which air is pumped, either by a hand pump or else mechanically by the engine, or, again, by a fan operated by the passage of the machine through the air. Generally a pressure of 2 lb. or 3 lb. per square inch is sufficient, and should the pressure increase beyond normal, some kind of adjustable safety

valve or tap should come into action to prevent the tank being unduly strained. Pupils are often liable to forget the necessity for keeping pressure in the petrol tank by hand pumping from time to time, and have suffered forced landings in consequence. The best type is that in which the hand pump is only used as a standby or for starting up, the pressure being mechanically maintained as soon as the engine is running. Leakage of pressure may be due to the petrol filler cap not being properly screwed down, or to taps or safety valves not seating properly, in which case they must be ground in until an airtight joint is obtained. Failure to hold pressure may even be due to a careless mechanic fitting the oil tank filler cap, which generally has a hole in it, to the petrol tank and vice versa when last replenishing the machine.

There are many other kinds of instruments to be found on Service machines, but, beyond mentioning these, there is no need for the beginner to worry his head about them. Such instruments as a petrol flow indicator, radiator temperature indicator, bomb sights, aeroplane cameras, and aircraft course and distance indicator, are all used on advanced Service machines; but by the time that the pupil is able to fly a machine of this type he will find no difficulty in understanding or operating these fittings.

One Instrument to Check Another.

From the knowledge of the possibilities of the instruments a pilot can very often use one as a check upon the other, or use two in conjunction in place of another which may have failed. For instance, in a cloud, if the compass card begins to spin, it is an indication that the machine is turning in the opposite direction, whereupon the pilot should know how to counteract it. By watching the compass card dip or rise, fore and aft or sideways, the pilot knows that his machine is doing just the opposite, and, accordingly, counteracts the movement with his controls. By observing the height indicator he knows if his engine is pulling properly, for if he were to keep the machine

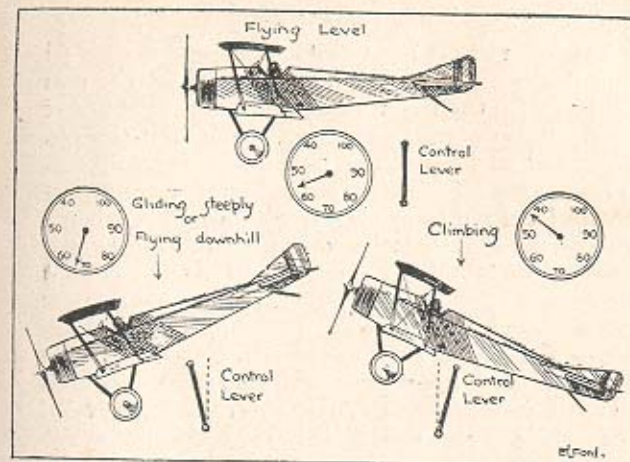

One instrument to check another. Showing how the air speed indicator can be used as a fore-and-aft level. If the machine flies level at 57 m.p.h., it must be descending at all speeds above that, and climbing at all speeds below until the stalling point is reached.

at its normal flying speed and it were to drop, as shown on the height indicator, this would be direct evidence that the engine was not giving its full power. The air speed indicator tells the pilot when he is climbing or descending, and also, when used in conjunction with the height indicator, it keeps him informed as to how the engine is running. The engine revolution counter, in addition to indicating the revolutions of the engine, can be used to show whether the machine is climbing or descending as the revolutions slow down or increase accordingly, within certain narrow limits.

The sideslip indicator may either be an instrument based on the principle of having an air speed indicator at each wing tip to register the difference in speed between the two wings, or it may take the simpler form of a piece of string allowed to trail backwards in the view of the pilot. In a cloud the cross level may be used to some extent to maintain the lateral level, the pilot following the bubble with the stick.

Watching the Bubble.

The fore-and-aft level could be used if the air speed indicator failed, as it might do through intense cold or condensation and frost. Assuming that a pilot knows at what number of degrees it is safe to climb the machine, a fore-and-aft level can be used successfully for flying, so long as the engine gives its normal power. The side-to-side level indicator shows, within limits, when one wing is up and the other down. The general rule is for the pilot to follow the movement of the bubble with the control lever. If the bubble rises to the left side it indicates that the right wing is down, therefore the pilot moves the control lever to the left, i.e., he follows the bubble in order to counteract the drooping wing. This rule only applies to small deviations from the horizontal. The bubble is also used to indicate a sideslip on turns: On a perfectly-executed turn the bubble should remain central. If it moves towards the lower wing on a turn it shows that centrifugal force is flinging the liquid towards the outer wing—in other words, that the bank is too small and the machine is sideslipping outwards. If the bubble is near the top wing on a turn it indicates that the machine is sideslipping inwards and that the bank is too steep.


The Importance of the Watch.

The watch serves more than one purpose. With it a pupil can tell, more or less, his whereabouts, i.e., providing he has calculated his speed correctly. He can easily verify this by timing himself over the first division of the course which he has marked out on his map. He knows, too, when his petrol and oil supply may be expected to run out, how much daylight he has (an important factor if he starts on a cross-country flight on a winter's afternoon), and in an emergency he can often use his watch to tell him the north, in the case of his compass failing. This is done by pointing the hour hand to the sun, and by dividing the angle between it and 12 o'clock, the result, in the northern hemisphere, being that the dividing line points to the

south. If he lost himself and his compass were to fail, he would come down to find his whereabouts on the map with the aid of his watch, and then note some visible and prominent landmark on his right course: He would then fly to it by sight; but, before reaching it, he should pick up two other objects on his correct line of flight, which will help him to keep his course when he has left his first landmark behind. By repeating this process it is possible for him to arrive at his destination without the use of a compass.

Testing the Speed Indicator.

The object of describing how one or two instruments can be combined to make a substitute for another is that, when one fails, the pilot need not feel lost. The air speed indicator may fail through a rubber joint breaking or a leak occurring, or even through it being frozen up. This can be tested by blowing down the tube until the pointer shows 70 or 80 miles per hour: the tube is then sealed up by holding the tongue over it,

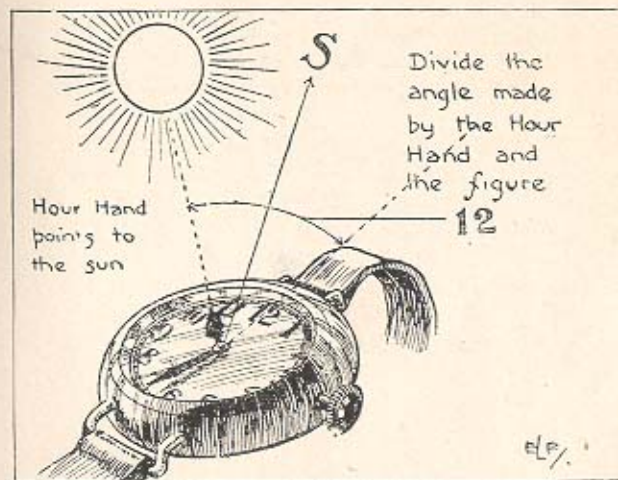

Importance of a watch. How to tell the north or south in the northern hemisphere by using the watch.

and if there are no leaks the pointer will remain at the set mark, falling back to zero when the pressure is released. The engine revolution counter may suffer defect either through the oil being frozen or the drive breaking, while the height indicator sometimes fails or sticks.

CHAPTER VII.

Map Reading.

IT is necessary for a pupil to be able to read a map before his aerodrome flights can be expanded to a cross-country journey. Those who have studied maps for motoring or cycling before taking up aviation will find that map reading is quite a simple matter. It is necessary to become familiar with some of the more common terms used in map reading and map making. The following have been selected as being of value:—

BEARING.—A true bearing is an angle which a plane or line makes with the true meridian or north. A magnetic bearing is an angle a plane or line makes with a magnetic meridian or north.

A CONTOUR is an imaginary line running along the surface of the ground at the same height all the way round. Each contour represents a fixed rise or fall of so many feet from those next to it. This fixed rise is called the vertical interval, or, for short, "V.I."


THE HORIZONTAL EQUIVALENT, or, for short, "H.E.," is the distance in plan between two contours.

A GRADIENT is a slope expressed as a fraction. Thus a gradient of 1-10th indicates a rise or fall of 1 ft. in 10, or 1 metre in 10 metres, etc.

A DATUM LEVEL is an assumed level, by reference to which heights are measured or compared.

HACHURES are short, disconnected strokes of the pen by which the shading of hilly features is effected. The strokes are drawn directly down the slopes. The closer together the hachures the steeper the slope.

A MERIDIAN is a true north and south plane or line, and a magnetic meridian is a magnetic north or south plane or line.

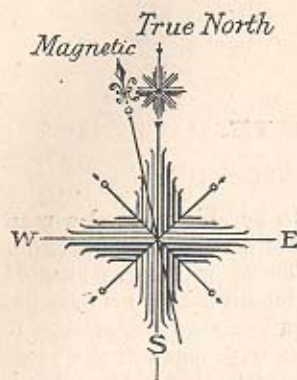


How the true and magnetic north of a map are indicated.

Magnetic meridians indicate magnetic north and can be used accordingly. Meridians on maps are generally true, and not magnetic.

Reckoning the Scale.

The next most important point to look at is the scale of the map, for, without a scale, a map might depict a whole country hundreds of miles across, or merely a county or department. There are two methods of indicating the scale: firstly, by drawing one in inches, in which case it is stated on the map how many miles of ground are equal to 1 in. on the map; the second method is indicated by the words, "Representative fraction equals 1-100,000," or some other fraction. In the first case, assuming the scale is 2 miles to an inch, it means that 2 miles on the ground are equal to 1 in. on the map. Thus, by measuring the distance in inches between any two points on the map, the pilot can at



A typical method of indicating the scale of aviation maps.

once find out how much this represents in miles on the ground. Sometimes the letters "R.F." are used instead of the words "Representative fraction." The method of reckoning the scale by means of the R.F. is quite simple. Assuming a scale of 1-100,000, this means that one unit on the map—it does not matter whether it is an inch, a millimetre, or any other unit—is equal to 100,000 inches, or millimetres, or any other unit which has been taken on the ground. The pilot can then work out the scale accordingly. If he works in inches in this particular case, he will find that 1 in. on the map is approximately equal to 1 mile 1017 yds., or, if he works in millimetres, that 1 mm. on the map is equal to 1 kilom. on the ground. Incidentally, this will show the benefit of using the metric system.


Maps Without Scales.

It is possible, in certain circumstances, for a pilot to be faced with a map on which the scale is not marked. Obviously, before proceeding to use the map he must discover the scale. He can do this by finding two places he knows on the ground and recognizing them on the map. They may be two villages, a farmhouse and clump of trees, or two towns. Now, he must find out by measuring—by milestone, or by hearsay if necessary—the distance between these places on the ground. It can be assumed that it is 4 miles: he then measures the distance between these two spots as shown on the map and finds that it is 2 ins. The scale of the map in this case is therefore half-an-inch to a mile.

How Contours are Indicated.

Having mastered the scale, the next thing to do is to study the methods employed on a map for illustrating graphically the features on the ground. He will find that heights are indicated on different maps in different ways. Sometimes this is done by colouring, the darkest portions of the map being the highest, and the lightest the lowest. Generally there is a column of colour at one side of the map, and the heights corresponding with the colours marked. The commoner

method of indicating height is by contour lines. These can be seen on most maps in the form of irregular curved marks all over the map. A certain set height, called the "Vertical interval," is fixed as a height between these contours, and the amount of the vertical interval is sometimes indicated at the foot of the map. It may be 10 ft., 50 ft., 100 ft., or 500 ft., according to the map. All ground at, say, 10 ft. above sea-level is then joined up by a line on the map, and, assuming the

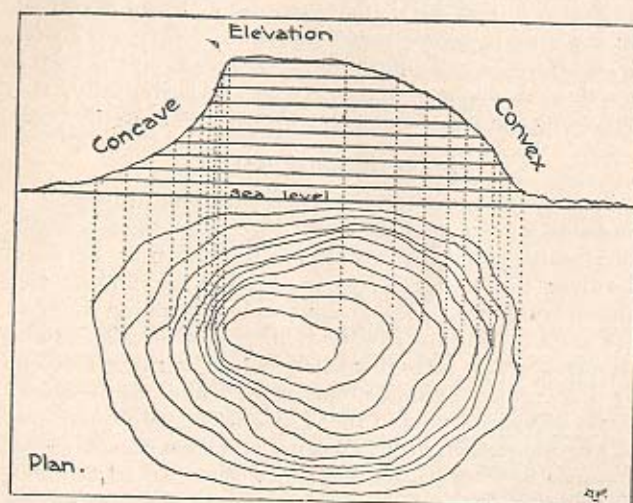

An elevation of contour lines indicated on the map, showing how a concave or convex form of hill can be recognized.

vertical interval is 10 ft., all ground of 20 ft., 30 ft., or 40 ft., and so on, is joined by means of lines, which result in the thin and wavy marks on such maps. Naturally, it is impossible for one contour line to cut another, for this would mean that one part of the ground overhung another considerably. If a pilot knows the height indicated by any one contour line, and also the vertical interval used, he can calculate, by counting the lines above or below and multiplying the result by the

vertical interval (which is always given in feet), how much any other piece of ground is above or below the one he started with.

He must remember that on some foreign maps the height is not marked in feet as in English maps, but, perhaps, in metres instead. When studying his map before making a cross-country flight, it is advisable for him to note the highest ground across which he has to fly, and also to calculate how high it is above his starting point. If, for instance, the aerodrome he started from is 600 ft. above sea-level, and there is ground 2600 ft. high ahead of him, he will know that when his altimeter, which he has set to zero at starting, shows 2200 in the neighbourhood of this range of hills, there is some chance of his hitting them. This might easily happen were he to fly into thick mist or fog during a long cross-country flight; hence the importance of studying the heights or contour levels on a map before starting.

Convex and Concave Configuration.

In certain circumstances it may be difficult to find out whether the contour lines indicate a dip or knoll; but, assuming that there is a river or sea coast on the map, the rise of the land can be calculated with this as a base; the flow of a river being known, the lines crossing towards the mouth must be lower than those nearer the source. Generally, however, the heights of contours are marked. Sometimes what is known as a spot level—a small triangle with a height appended to it—will be found at various points on the map. In passing, it may be noted that when the contour lines are close together the slope is steep, and when they are far apart the gradient is more gentle. The hill in which the lower contour lines are far apart and the higher ones close together is said to possess a concave slope; whereas, in a case in which the top contour lines are wide apart and the lower ones close together, the slope is what is known as convex. In a concave slope, the whole of the ground from the top to the bottom is visible from either point; but in a convex slope those stationed at the top and the


bottom cannot see each other owing to the bulge in the side of the hill intervening.

A further method of indicating height is by means of hachuring, which consists of a number of short lines drawn down the slopes of a hill.

How Features are Indicated.

The colouring of a map is useful in other ways besides indicating height. Woods, for instance, are often coloured green, railways are indicated in black, roads in red or brown, and water in blue. Towns are often shaded in black, although, of course, this is only done in large-scale maps. It is necessary to familiarize oneself with these methods of indicating the main features and landmarks of the country, which will be of the utmost importance when making a first cross-country journey.

There is still room for very great improvement in aviation maps. Motor maps are of little use, as they generally show a confused mass of small details, which are quite unnecessary to the aviator. All he wants are a few general landmarks depicted clearly and ac-

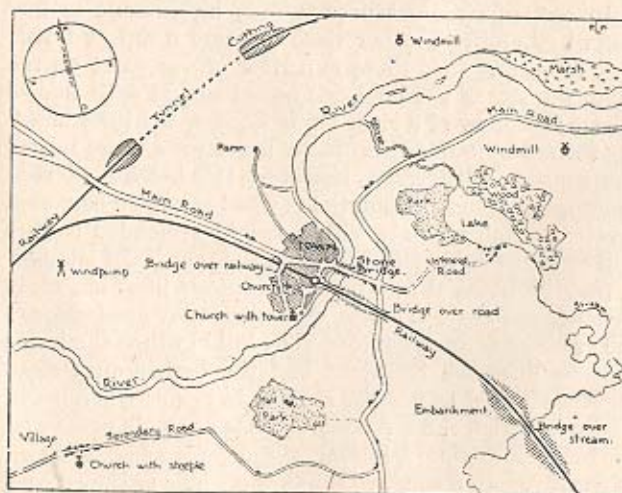

How to read the conventional signs on a map.

curately, such as large woods, trunk railways, main roads, rivers, lakes and towns. In his work no one of these features alone gives him his bearings, but, rather, their relationship to each other. At a fair height, say, from 5000 ft. to 10,000 ft., many of the small details given in ordinary maps are unnoticeable.

Maps of the Future.

Special aviation maps are being produced from time to time in which only main features that can be recognized by an aviator from a height are included. These maps, of course, are on a much smaller scale than the ordinary road map and present the advantage of including in one sheet quite large tracks of country, so that there is no need for the pilot to join several maps together in order to obtain a continuous plan of his course. When a pilot has flown a good deal over certain tracks of country, he will be able to pick out for himself any useful landmark which he can easily recognize. A peculiarly-shaped field, a row of houses, a bridge across a reservoir, a chateau or monastery with a curiously-shaped entrance drive, or a park placed in an isolated position, may give him clues as to his whereabouts which it would be impossible to mark on a map. There is certain to be very great improvement in aerial maps in the future, and it seems probable that photography may be called to the aid of the aerial map maker.

Studying the Ground Round the Aerodrome.

In a succeeding chapter on cross-country flight, such questions as studying the map, working out the course and finding the way when lost will be investigated; but it should be distinctly understood that a pupil cannot put in too much time studying maps before he is actually to use them in flying across country. It is a good plan to obtain a map of the country surrounding the aerodrome and to study the ground from the air, and then compare it with the map. This can easily and most profitably be done during the early solo trips in the vicinity of the aerodrome. Then, when the crucial




A reproduction from the one-inch Ordnance Survey printed in colours, which should be compared with the chart of the Characteristic Features.

To face page 121.

THE PROTRACTOR

121

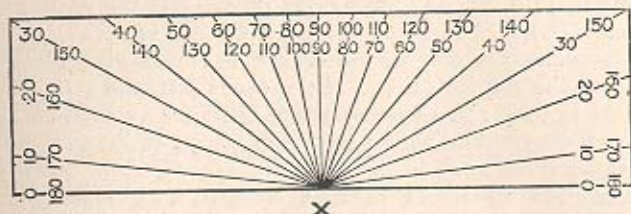

Angles are marked off from the point X, which is placed at the point of departure on the map, the instrument being laid N. and S. from 0 to 0.

The Protractor.

An instrument that is used considerably in flying, although it is not operated by the pilot in the air, is called the protractor. There are many different models obtainable. Pupils can select one that suits them best. A protractor is a flat piece of wood or transparent celluloid marked off in degrees and in various scales and measurements for use with maps or charts. These measurements may either be in inches or millimetres, or both. A popular type of protractor is illustrated, the method of reading angles or bearings from it being shown. On the reverse side of the instrument will be found a method for reading off the smallest measurement in decimal points. A scale is drawn out in the manner shown. (See sketch.) One of the main divisions is sub-divided into ten, and lines are drawn at an angle across it as well as parallel with the whole scale, the horizontal lines also dividing the scale into ten. To measure any distance exactly, it is taken to the nearest main division of the ruler, say C (see sketch), and the extra piece which is less than one of




Illustrating the use of the protractor in measuring the distance between two points to ten places of decimals.

B

the main divisions is measured off against the reduced scale (E). If it measures over 6, but under 7, the exact amount can be calibrated by measuring along down the sloping lines. If the exact distance came to 6 on the top row of figures, plus 5 on the vertical row, the measurement would total $ABC + .65$ of E., so that, taking the length (A) as one unit, any distance can be measured in terms of that unit to two places of decimals.

Another type of protractor consists of a square piece of transparent celluloid having a circle marked off in degrees from 0 to 360 described about its centre, attached to which is a piece of silk thread. At the top and bottom scales in metres and yards are marked off in convenient scales used in Continental maps, i.e., 1/80,000 and 1/100,000. To take a true bearing with this type of protractor, the central point is placed on the spot from which the bearing is to be taken, with the N. and S. line of

the protractor corresponding to the true N. and S. of the map. The silken thread leading from the centre is stretched across the protractor and map to the point the bearing of which it is desired to take, and the angle it makes with the true N. and S. line is read off on the arc of the circle. To lay off a course with this protractor, which is graduated in the same way as an aeroplane compass, the centre point is placed over the starting position and the silken thread stretched across the map and protractor, the arc of which it must cut at the desired angle. A pencil line made down the thread will give the desired direction.

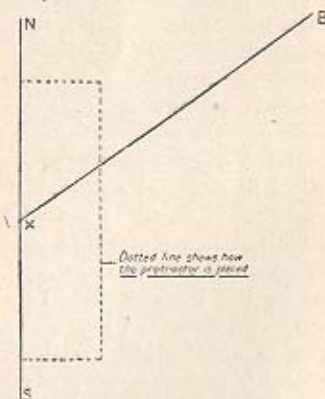

How to lay the protractor on a map.

CHAPTER VIII.

Preparing for a Cross-country Flight.

THERE are certain pilots who, when told to fly somewhere, hurry away into the air without proper preliminary study of their course and the country over which they are to fly. No wonder such aviators often lose themselves and meet with other mishaps. It may almost be said that careful preparation for a cross-country flight is half the flight finished.

When a pupil is told that he is required to fly to some spot—which may be called “A”—from his aerodrome at “B,” he should first proceed to obtain a suitable map, with the main features clearly marked on it, if possible having the whole journey on one sheet, with a scale of 4 miles to 6 miles to an inch. If his course lies across two adjacent sheets of a map, he must join them together with gum or glue and cut them to fit his roll map carrier.

Studying the Map.


He should spread the map out in front of him on a table, examine it carefully, and decide upon the route he is going to take, which may not be in a direct line, owing to the intervention of large towns or defended areas. With a ruler he joins the points decided upon, and then, from the scale of the map, works out the distance of the flight. Probably, to begin with, it will not be more than 50 miles or 60 miles.

Now, although it is possible to fly from place to place with the aid of a map alone, a pupil-pilot must remember that in his compass he has a more valuable friend than even his map. If he steers by compass alone and has calculated his course correctly, then, allowing for the time occupied and the speed of the machine over the ground, he can arrive at his destination without the use of the map. It is possible for a map to be blown

away in the air, or for it to be difficult to read, owing to bumps, and the attention of the pilot being taken up by the manipulation of the machine. When it is remembered that a very great area of land can be seen from an aeroplane at a height of even a few thousand feet, the necessity of steering a course to a degree is not so important as on a ship; moreover, bumps in the air make this almost impossible.

Variation and Deviation.

Having been through a course of navigation, he should have little difficulty accordingly in working out a compass course by drawing a picture and, starting

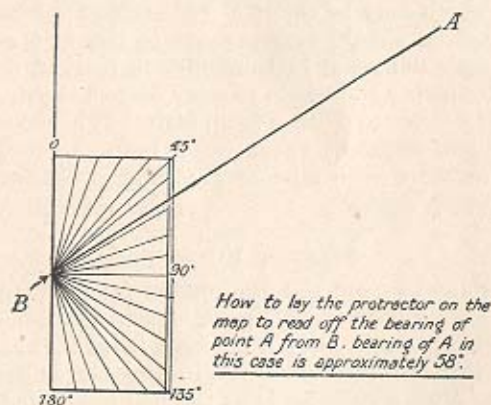

How to place the protractor on the map on a true N. or S. line in order to read the true course.

with true north, adding or subtracting variation, which, if not marked on the map, must be obtained from a variation chart. This gives him magnetic north, and then, by applying deviation (which is due to the influence on the compass of local iron and steel of the machine), he obtains compass north, and can calculate what the compass will read when he is steering on the true bearing he has worked out from his map.

For instance, let it be assumed that the pupil wishes to fly from B to A, two points on a map. He joins them by a line and then at B draws a true N. and S. line, which he can find, generally, by taking the side of the map as a guide as to the true N. and S., or else the true N. and S. may be marked on the compass rose on the map. He then measures the angle between the two lines, which will give him his true course. He does this by placing the centre of the protractor, on which angles are marked, on the point B in line with the true N. and S. line he has drawn, and reading off the angle that the line B—A makes with it. Imagine it is 58°. He should not have made any mistake either in placing his protractor correctly on point B, or in reading off the angle, because, at a first glance, it is obvious that he wishes to fly rather more than N.E. of his present position at B, and he already knows that the compass is marked, in a clockwise direction, from 0, or 360°, at N., to 90° at E., to 180° at S., to 270° at W., and back to 0, or 360°, at N. again. Therefore he knows that the bearing he desires must be a little more than 45°. He then makes a picture of his true course, so as to apply his variation and deviation correctly. Imagine the variation to be 15° W. He draws a line on the picture 15° W. of north, and marks it north magnetic. He finds from the deviation table on his machine that at E the deviation is 3° W., so he draws another line from B 3° W. of magnetic north, as deviation is always calculated from magnetic north, just as magnetic north is calculated from true north. All he has to do now to find his compass course is to measure the angle EBA. The picture has explained to him the following:—

The angle CBA = his true course = 58°.

The angle DBA = his magnetic course $58^\circ + 15^\circ = 73^\circ$.

The angle EBA = his compass course $73^\circ + 3^\circ = 76^\circ$.

By drawing a picture he can see whether he has to add or subtract his variation or deviation to or from his true course.

The angle DBC = variation = 15° W.

The angle EBD = deviation = 3° W.

Of course, if the variation were 15° E. and the deviation 3° E. instead, his picture would look like this. (See lower illustration.)


The angle CBA = his true course = 58° .

The angle DBA = his magnetic course = $58^{\circ} - 15^{\circ} = 43^{\circ}$.


The angle EBA = his compass course = $43^{\circ} - 3^{\circ} = 40^{\circ}$.

The deviation to be applied will be found in the deviation table, which should be pinned up in the machine he is to fly. Regulations are laid down that compasses must be swung or tested for accuracy after a machine has been wrecked or reassembled, after any new fittings have been added to it, when the

position of the compass is changed, or when armament, such as bombs or a Lewis gun, have been fitted. If there is no deviation table, the pupil will be well advised to have his compass swung before he leaves. At the same time, so much country can be seen from an aeroplane that a small error in steering is not of vital importance.



Indicating whether variation or deviation has to be added to or subtracted from the true course.




A diagram of a compass course with the variation and deviation applied correctly.

Swinging a Compass.

The following is the best method of swinging a compass. At most aerodromes the pupil will find a cement slab with eight lines radiating from the centre, or lines plotted in the ground. These lines indicate the four magnetic cardinal points of the compass, i.e., north, south, east and west, and the four magnetic quadrantal points, north-east, south-east, south-west and north-west. These lines have been correctly arranged by a compass expert with the aid of a landing compass, and will be situated far enough away from metal sheds for the metal not to have any influence on the compass.

The machine is then trestled up in the flying position, with its fore-and-aft line laid along the north and south lines on the ground. The pilot, or whoever is swinging the compass, can line up the machine by dropping a plumb line from the centre of the propeller and sighting along it to the tail skid, or another plumb line dropped from the centre of the fuselage until these lines coincide with the north and south line on the ground. It must also be made certain that the machine is dead level horizontally, i.e., from wing tip to wing tip. The lubber's line of the compass should be fitted in the fore-and-aft line of the machine. The compass reading is then taken, and it may be found that, owing to the influence of metal in the machine, it does not read magnetic north as it should do. Deviation will always be east or west, and the pilot must then insert a small field magnet in a slot provided for the purpose, generally in a box under the compass athwartships. If the reading of the compass is less than the magnetic, the direction is easterly, or if the reading of the compass is more than the magnetic, the deviation is westerly (or -). Thus if the machine is placed to head E. by the line on the ground and the compass reads 95 degrees, the deviation is W. (or -). If the deviation is westerly, i.e., the red end of the compass needle is swinging to the left, he must insert the red end of the field magnet to the left, so as to drive the red end of the compass back to north, working on the principle that, in mag-

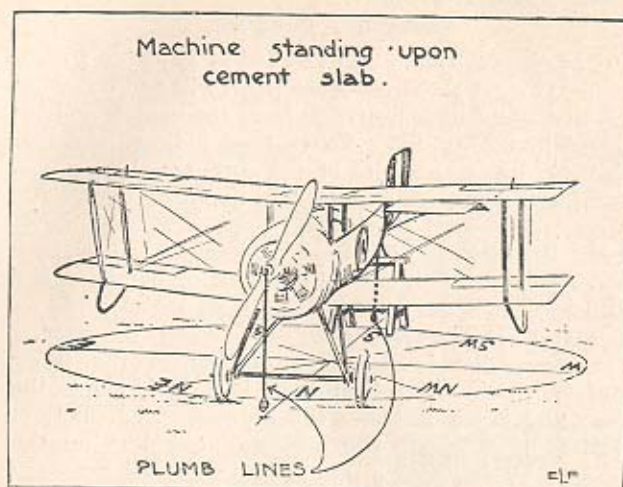


How to arrange the machine for compass swinging; testing the fore-and-aft alignment and lateral level.

netism, like repels like and unlike attracts unlike. He can vary the strength of the field magnet by inserting it nearer or farther from the needle, suitable slots being provided for this; or he may use a smaller magnet until the error due to deviation is reduced to one degree or two degrees. He repeats this process with the machine heading magnetic east and west, the only difference being that, when the machine is heading east and west, the field magnet inserted must be placed in the fore-and-aft line of the machine and not athwartships.

Making a Deviation Table.

Having reduced the error on the cardinal points to a minimum, a deviation table is prepared giving the compass reading for the cardinal and quadrantal points, and also stating the amount of error in degrees east or west at each of these points. In calculating his compass course, the pilot must allow for this error, and if his course lies between any two of these points he can divide the error between them. For example, if the

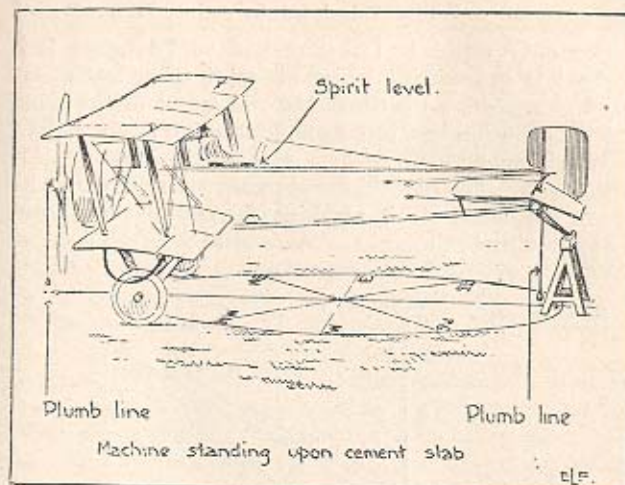

How to arrange the machine for compass swinging; testing the fore-and-aft level of the machine.


deviation is 2 degrees east on north and 2 degrees west on east, if his course is 45 degrees his deviation will be nil. A compass having been swung for deviation, no metal should be added to the machine; in other words, the pilot should not place a lot of tools in his pocket, or place a bag of tools behind the compass.

A table to be pinned up in the machine would look something like this:—

For Magnetic Course.	Steer by Compass.	Deviation.
N. ... 0 degrees	357 degrees	3 degrees E.
N.E. 45 "	47 "	2 " W.
E. ... 90 "	90 "	Nil
S.E. 135 "	137 "	2 degrees W.
S. ... 180 "	183 "	3 " W.
S.W. 225 "	223 "	2 " E.
W. ... 270 "	270 "	Nil
N.W. 315 "	317 "	2 degrees W.

The Wind Factor.

The only other factor that has to be taken into account is the wind. From his navigation lectures a pupil can make an estimate of the speed of the wind and its variation in strength and direction at the height at which he intends to fly. He can incorporate this in the course he is working out, and, assuming that he knows the speed of his machine, he can also work out the approximate time the journey will take. Supposing

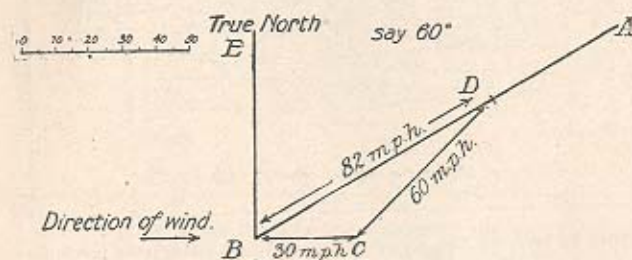

Calculating the effect of wind on the course to be steered across country.

that the pilot wishes to fly from B to A. He draws a picture and makes a scale of miles per hour, the line B—A being laid off at the correct angle to the true north for his true course. Imagine a west wind blowing at 30 miles per hour. He draws a line from B in the direction that the wind is blowing, i.e., from W. to E., and marks off on that line a point C, distant the equivalent to 30 miles per hour on his scale. Next, with centre C and radius equal to the air speed of the machine, i.e., 60 miles per hour, obtained from the scale, he describes an arc to cut the line B—A at a point, say, D, joins C—D, which will be the direction to steer, allowing for a west wind of 30 m.p.h. If he measures the angle that C—D makes, with the true meridian B—E, he will find that it gives him the correct course to steer allowing for the wind; in this case it is 44° in place of the true course of 60° obtained without reference to the wind. By measuring off B—D

from his scale he can obtain his speed over the ground, allowing for the wind. In this case it is 82 m.p.h., as against 60 m.p.h. in calm air. In calculating the speed and direction of the wind, which is always given as "True," the pupil must remember that the velocity of the wind increases with height, and that at 3000 ft. it may be twice as strong as on the ground, and may have veered as much as 20 degrees.

The speed of the wind and its direction are best obtained from the nearest meteorological office, but what is known as the Beaufort Scale is often used for determining the speed of the wind near the ground. It is given on the next page for reference.

In a long flight of several hundred miles a pilot cannot have too many checks upon his journey. He must also remember the time the machine can remain in the air, and for this reason it is wise for him to get into the habit of making these calculations even when proceeding on short cross-country journeys.

Radius of Action.

This presupposes that he is already familiar with the quantity of oil and petrol carried by the machine and the hourly consumption of fuel. In out-and-home flights he should be able to work out his radius of action, not forgetting to allow for the wind and the time taken in attaining his height, otherwise he may run out of petrol on the return journey.

For instance, the pilot may require to find the radius of action of his machine. If there is no wind the calculation is simple, assuming that the speed of his machine is 60 m.p.h. and it can remain in the air for six hours. His radius of action will be:—

$$60 \times 6 \\ \hline = 180 \text{ miles.}$$

2

If there is a wind, however, an allowance must be made for it. Assume that the wind is dead against him on the outward journey and with him on the return. Speed of wind 25 m.p.h., speed of machine 60 m.p.h., duration of machine six hours.

The Beaufort Scale.

A System of Calculating the Speed of the Wind.

Force.	Description.	Characteristics.	M.P.H.
0.	Calm	Smoke rises vertically	0
1.	Light air	Direction of wind shown by smoke drift, but not by vanes	2
2.	Slight breeze	Wind felt on face. Leaves rustle; ordinary vanes moved by wind	5
3.	Gentle breeze	Leaves and small twigs in constant motion. Wind extends light flag	10
4.	Moderate breeze	Raises dust and loose paper. Moves small branches	15
5.	Fresh breeze	Small trees in leaf begin to sway. Wavelets form on inland waters	21
6.	Strong breeze	Large branches in motion, whistling heard in telegraph wires	27
7.	High wind	Whole trees in motion; inconvenience in walking against wind	35
8.	Gale	Breaks twigs of trees and generally impedes progress	42
9.	Strong gale	Slight structural damage occurs, chimney pots and slates removed	50
10.	Whole gale	Seldom experienced inland; trees uprooted; considerable structural damage	59
11.	Storm	Very rarely experienced, accompanied by widespread damage	68
12.	Hurricane	Above	75

On the outward journey his ground speed will be $60 - 25 = 35$ m.p.h.

On the return journey his ground speed will be $60 + 25 = 85$ m.p.h.


The ratio of the speed of his outward to his return journey will be as 35 is to 85 or as 7 is to 17. Therefore the time he must take on his outward journey is 17.24 of six hours, and on his return journey 7.24 of six hours. Therefore the outward journey will take $4\frac{1}{4}$ hours and the return journey $1\frac{1}{4}$ hours. The speed of his machine on the outward journey is 35 m.p.h., which, multiplied by the time of $4\frac{1}{4}$ hours, equals a radius of action of $148\frac{3}{4}$ miles. The speed of the machine on the return journey is 85 m.p.h., which, when multiplied by the time $1\frac{1}{4}$ hours, equals a radius of action of $148\frac{3}{4}$ miles.

The wind will hardly ever blow directly along the desired course, so that to work out the radius of action for oblique winds a picture must be drawn as was done in the case of allowing for drift. The ground speed on the outward and return journeys can be calculated by the formula:—

$$\text{Radius of action} = \text{petrol hours} \times \frac{\text{speed out} \times \text{speed in}}{\text{speed out} + \text{speed in}}$$

For instance, the pilot requires to find his radius of action to the S.W. on a 60 m.p.h. machine, air duration six hours, and with an east wind blowing at 24 m.p.h. As before, he draws a scale of m.p.h. (See sketch.) He takes the true bearing 225° from A and draws a line on it towards B. He produces this line in the opposite direction, i.e., N.E. He desires to fly as far in the direction of B as possible, at the same time leaving enough petrol to return to his starting point at A. Next, he marks off the direction of the wind from A, i.e., to the W., by means of a line on which he marks its strength by referring to his scale. This will be the point C. With centre C and radius (obtained from the scale) of 60 m.p.h., the speed of the machine, he cuts the line B—D both above and below A. These points are found at B¹ and D¹. Now the angle that

CB¹ makes with the true north line will be the course outward, which equals 212°, and the angle that CD¹ makes with the true north line will be the course homeward, which equals 58°. The distance AB¹ equals the outward speed, e.g. (obtained from scale)

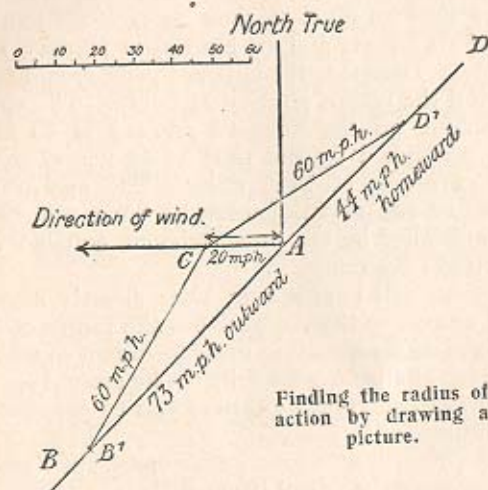

73 m.p.h., and the distance AD¹ equals homeward speed, e.g. (obtained from scale), 44 m.p.h. Then, by applying the formula already given, he works out his radius of action as follows:—

$$\text{Radius of action } \frac{6 \times 73 \times 44}{73 + 44} = 6 \times 73 \times \frac{44}{117} = 164.7$$

miles. This result allows of no margin of safety for a change of wind to a more adverse quarter or for time lost should the pilot lose his way, so that in his calculations a margin of at least 20 per cent. should be given.

All these calculations will require to be verified in the air for safety sake, but the pilot will be surprised how accurately it is possible for him to work out his speed and course.

Finding One's Bearings.

Having worked out the course, it will be found useful to divide the line on the map which joins A and B into equal distances, each representing, say, 10 miles on the ground; then, assuming that the pilot has calculated that his speed over the ground will be 60 m.p.h., if he takes his time of departure, even if he gets lost, he can tell approximately where he should be on his journey by looking at his watch. This will help him to find his bearings again, as a lot of ground is eliminated from his reckoning. Suppose, for instance, that a pupil lost himself for some reason after flying for about 30 minutes. He will know, if he has divided up and numbered his line, that he must be somewhere about the third mark. All he has to do then is to find some landmark in that neighbourhood and recognize it on the map, or vice versa. If the pupil realizes that he has not sighted one or two principal landmarks that he should have done, he should come down and ascertain where he is. Of course it is of the utmost importance that all these preliminary calculations should be accurate, and if he calculates his course as north-east when it should be south-west, or reckons the wind is with him when it is against him, he is sure to make a mess of things; hence the importance of checking preliminary calculations very carefully, as these mistakes are more common than one would imagine.

The Inter-relationship of Landmarks.


He will now spend some time in studying his map, and, if possible, he should be able to memorize the principal landmarks, the order in which they will present themselves to him, and their relationship to one another. He should note the highest ground he has to fly over and should know the kind of landmark to look for. In cross-country flying he must remember that hills and valleys look flat at a height of a few thousand feet; therefore, he should not waste time in trying to memorize them. It is such features as railways, large sheets of water, reservoirs, lakes, rivers, woods, towns

and sea coast that he should pick out. More important still is the inter-relationship between these features that he must visualize. He must study how railways and rivers enter and leave towns on or near his route; how railways join each other or intersect; any curious curves or particularly straight stretches of railway line, river or canal; the angles that towns, sheets of water or woods bear to each other; and, by doing this (which will come natural to him after a few cross-country flights), he will become familiar with the details of the journey ahead of him even before he takes the air.

The Chief Characteristics.

It is a good plan, too, on a long flight to study the kind of country to be crossed. Thus the first portion may be suburbs, and then may come 10 miles or 20 miles down the valley of a big river, where the ground is flat and marshy. The next stage may consist of thickly-wooded country, and the last stage, perhaps, of rolling downs and open farmland. If he lost himself on his journey, he could probably tell his whereabouts by the nature of the land under him. The importance of this preliminary study of the map by a pupil cannot be sufficiently impressed on him, and, to start with, perhaps, he will do well not to fly too high until he is proficient in map reading and realizes, for example, that a town which, at 1000 ft., he can recognize street by street and house by house, looks like a black smudge when he ascends to 8000 ft. or 10,000 ft.

and the a. of the country. The course of the river is a good guide to the nature of the country. The course of the river is a good guide to the nature of the country. The course of the river is a good guide to the nature of the country.

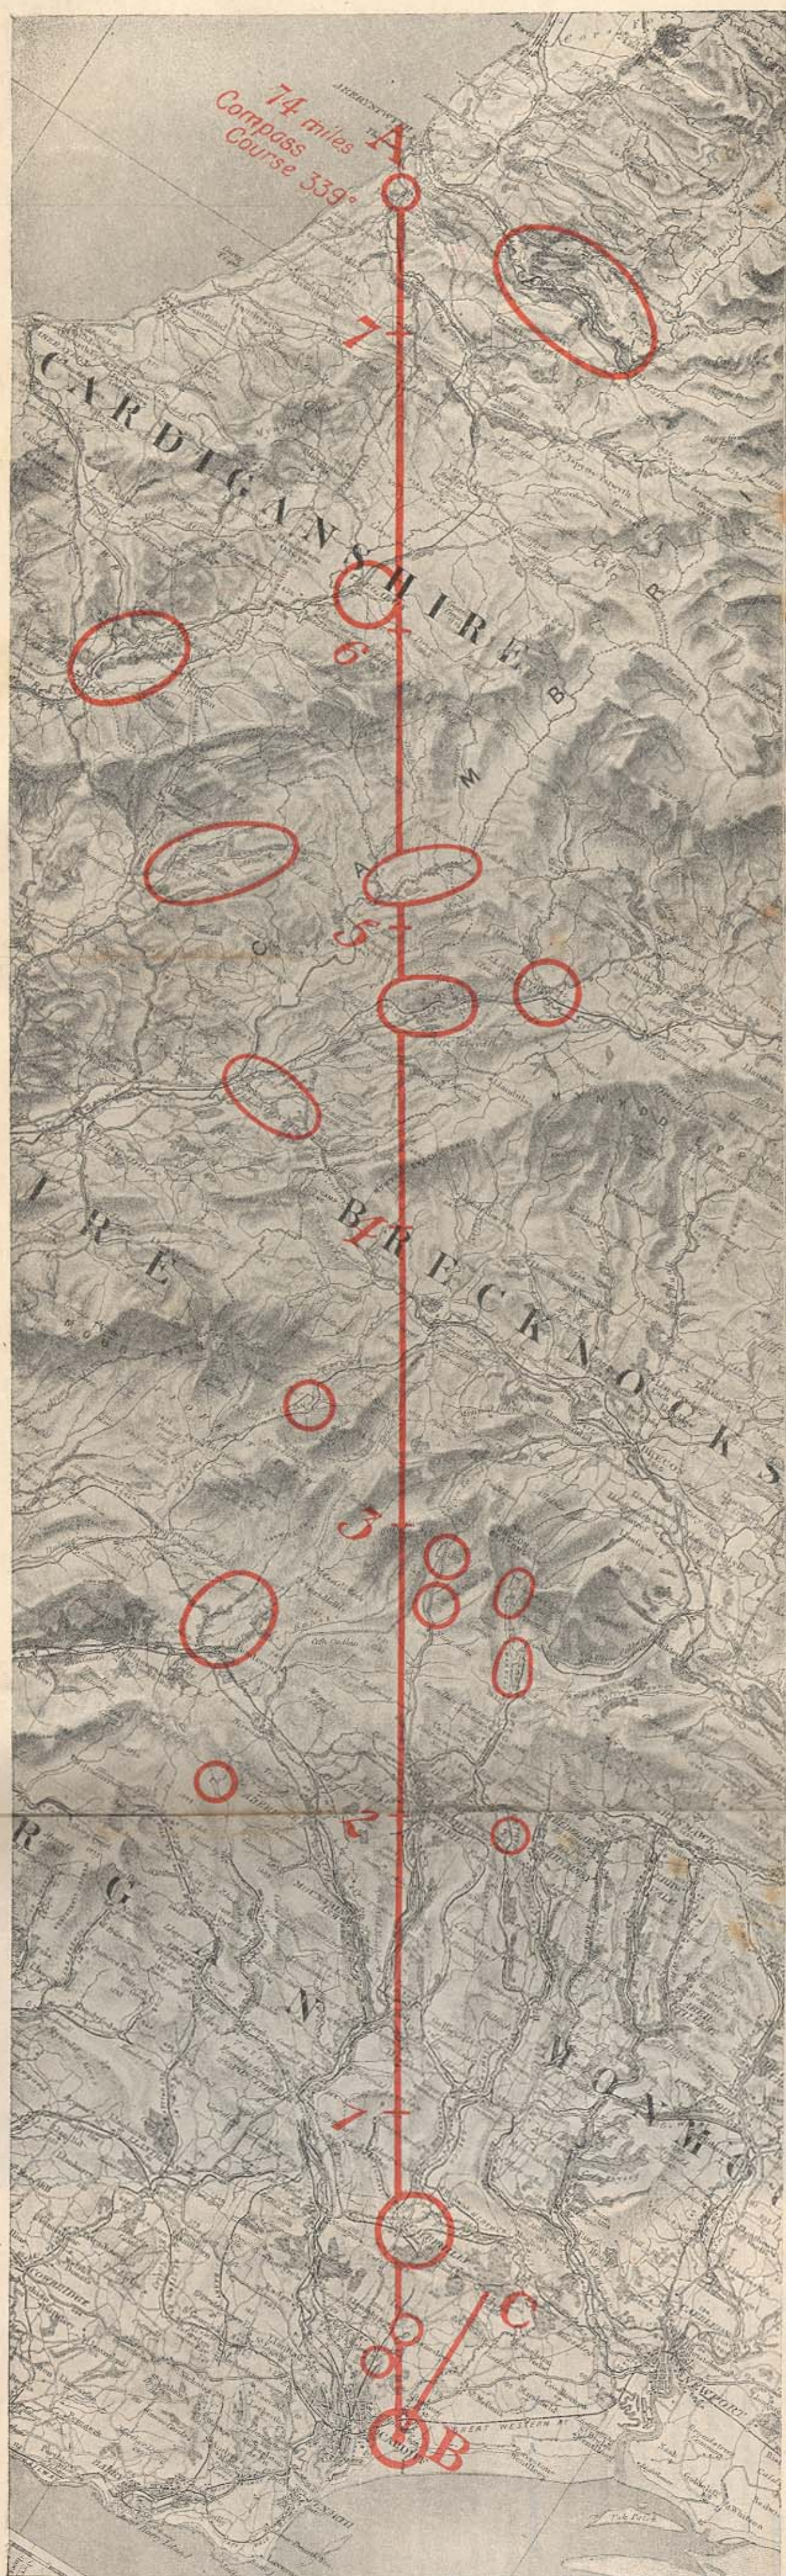

A section of the Ordnance Survey map, four miles to inch, cut up to fit a map holder for the purpose of a cross-country flight. The course is marked in stages, and features to be looked out for are denoted by circles. See explanation, page 137.

To face page 137.

Preparing and Studying the Map Before a Cross-country Flight.

An Explanation of the Accompanying Map.

EXAMPLE.—Flight from aerodrome B, near Cardiff, to aerodrome A, near Aberystwyth.

Join A B, which will represent the line of flight.

From the scale at the foot of the map find the length of the journey = 74 miles.

Divide the journey into equal sections of, say, 10 miles; mark and number these on the map.

Work out the compass course by drawing line B C true north (obtained from true meridian) and measuring angle CBA = 329 degrees. Apply variation, say 15 degrees west, in which case it is added = $329^{\circ} + 15^{\circ} = 344^{\circ}$. Also, apply deviation from deviation card in machine, say 5 degrees, east, in which case you subtract. Compass course then equals 339 degrees. A figure can be made out to calculate for wind as described elsewhere, but in this case it may be assumed that there is no wind.

Assuming the air speed of the machine to be 60 m.p.h., the pilot calculates that the journey should take about $1\frac{1}{4}$ hours, and that each stage of 10 miles will be covered in 10 minutes. Supposing he starts at 12 o'clock mid-day, he will pass the stage marked 1, at 12.10; stage 2, at 12.20; stage 3, at 12.30 and so on.

Cut the map with scissors or a knife the correct width to fit in strip form in a roll-type map-carrier, and mark the course and distance on it. [The section of the map printed is so cut.] Then try and visualize the map and note the important landmarks, their relation to each other, and at what time and distance they should come into view. Note also the fact that most of the ground travelled over is mountainous, and therefore bad for landings. On stages 1, 2, 3 and 4 there are mountains 1500 to 2000 ft. high, but the worst ground, judging from the map, occurs between the stages 5 and 6. The very unfavourable character of the ground necessitates the pilot flying as high as possible, so that he will probably add 10 minutes or so to the time of his first stage to allow him to gain a good altitude of, say, 5000 or 6000 ft.

Study the main features and landmarks of the map stage by stage.

Stage 1.—Caerphilly railways in X form make an excellent landmark; also the big wood S E; note the shape of this wood and also the water at Llanedeyrn and Whitchurch.

Stage 2.—Note the double railway lines, road and water leading direct on the course to Merthyr Tydfil, which should be easy to pick up, but which may be confused with Rhymney or Aberdare if the pilot is off his course at all. The lake to the W. of Aberdare would show him his mistake, however, but here again it may be confused with the lake W. of Rhymney.

Stage 3.—The road and two sheets of water on it are the best guides in this case. The pilot might note the straggling wood to his left and several sheets of water to his right, also the railway curving away to the N.E. from Merthyr Tydfil.

Stage 4.—If the pilot has got so far he cannot miss crossing the Meath and Brecon railway, and he should try and make for the point where it joins the River Usk. The wood Yr Allt is an additional landmark at this point, and he should note its shape and relation to the river and railway. The large reservoir on his left is another good landmark.

Stage 5.—Note Llandovery, the river and woods on the left, and fly on until crossing the railway, taking note and not being misled by the tunnel. If in doubt then keep along on the compass course until crossing the banks of the River Towy, where there are woods on each side of it. Note Llanwrttyd Wells, the road, railway and river on right, also the wood N.W. of the town.

Stage 6.—Nothing much to indicate the route except one small lake on the right and possibly woods round Lampeter, if the visibility is good. A difficult section for this reason and also because of the mountainous country traversed.

Stage 7.—Tregaron forms an excellent landmark. Note the V fork of the roads, also the railway, which must be crossed at right angles. Then keep to the left of all woods and railways. Look out for the sea coast on your left and fly along it northwards until striking the first large town. If the pilot strikes the coast too high up he can easily find his mistake out as there is a railway running parallel with the coast to Aberdovey, whereas S. of Aberystwyth there is no railway. He should not mistake Aberdovey for Aberystwyth, because the mouth of the Dovey is a distinctive feature in the former town and the railways are quite differently arranged. Having studied the map as indicated, he can fit it in his map case, roll it up and get ready to start.

To assist the pilot, a rough time and distance table of the journey may be made as follows:—

Time.	Distance. Miles.	Landmarks.
12 o'clock	—	Start. Climbing for height.
mid-day		
12.10	7	Caerphilly Wood S X railways.
12.30	20	Merthyr Tydfil, cross-roads and double railways and road direct on course.
12.40	30	Two lakes on course.
12.47	37	Cross railway, roads and river.
12.54	44	Llandovery, river and woods on left.
1.8	58	Round lake on right.
1.10	60	Tregaron, railway and roads crossed at right angles. Sea coast should be in sight very soon.
1.24	74 miles	Arrive Aberystwyth, dense woods on right.

To make certain that the table is correct the pilot could time himself over one of the stages and work out his speed from that. The woods, coloured green in the original, are difficult to reproduce, and are, therefore, not easily discernible in the accompanying map, and allowance must be made for this.

How to Carry the Map.

The next thing to do is to fix the map in the most convenient position. Some pilots prefer to have it pinned up in front of them on the instrument board, and others to have it slung round their necks in a roll-type map carrier. In either case the line of vision of the pilot should be removed as little as possible from straight ahead when he requires to read his map. This remark applies equally to instruments, which are better fitted in a group than when spread out over the dashboard. A third method is to carry the map loosely in the pocket; but it may easily be lost, and, in any case, it is difficult to unfold or turn over when necessary. If the map is carried in a roll case slung round the neck, care should be taken that the case does not jam the control lever at any time.

The pupil is now almost ready to set forth on his flight. Where it is possible, and the weather is changeable, it is a good thing to telephone to aerodromes en route, and also to his destination, and obtain a weather report, which will give such items as height of clouds, strength and direction of wind, and visibility. He must glance at the barometer, too, and if the glass has fallen much he must look out for bad weather. Incidentally, the height indicator can be used as a barometer, and if set to zero one evening and found to read 400 ft. the next morning this indicates that the glass has fallen.

Preliminary Details.


While waiting for the weather report, the pilot can look over his machine and engine, as described previously. He must see that the petrol and oil tanks are full and that the instruments are working properly, that the height indicator is set to zero, the engine running well, and a bag of tools with a few spare parts, such as sparking plugs, valves, magneto contact breaker, some high-tension wire, a complete petrol pipe with unions, some insulating rubber tape and copper wire, are securely packed away in the locker. None of these things should be taken for granted, and it is no insult to the mechanics to look over the machine one is going to fly.

In some cases in England it is necessary to send warning to the air authorities and to obtain leave from them before starting on a flight. It is advisable to find out whether the flight necessitates crossing any defended areas, which can be found out by telephoning to headquarters. These should generally be avoided, unless they have been advised of the flight before, otherwise the pilot may be mistaken for an enemy aviator and dealt with accordingly.

If the pilot is in the Service he must remember to take his Service cap with him. This can be stored in one of the drawers or lockers fitted to most machines. If a suit case is carried, care must be taken to have it firmly secured to the seat so that it cannot possibly foul the engine or machine controls.

Position and Comfort.

It should be remembered that a cross-country flight of an hour or more is a much more tiring undertaking for a beginner than a few short trips round the aerodrome, although for his instructor the reverse is the case, as a straightforward flight is much easier than continual landings and turnings. The pupil should make himself as comfortable as possible in his machine. He should avoid cramped positions at all times, and, if necessary, the seat can often be moved further back to give him more leg room. In view of the possibility of cramp in the legs, it is a good plan to fit toe straps on the rudder bar, so that the rudder can be controlled by one foot while the pilot stretches the other. A short man should make certain that he can reach the rudder when it is fully over with his knee just bent, and if he cannot he should fix a cushion, or cushions, behind his back so as to pad him up. Similarly, if his view is obstructed, he can improve it by adding an extra cushion or two to his seat.

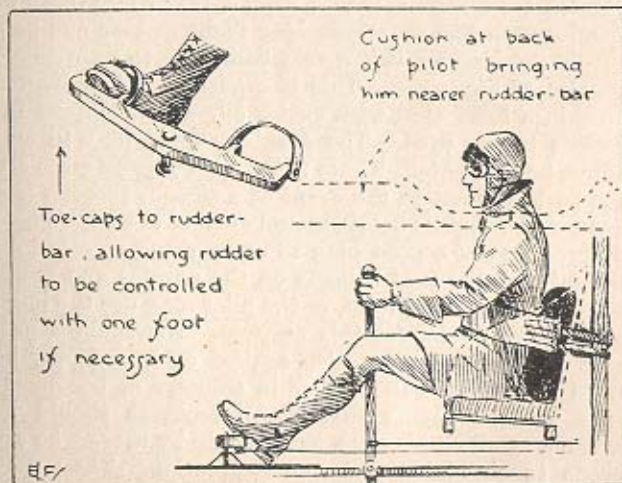

A comfortable position for the pilot is most important in long flights. Two points worth remembering are illustrated.

Clothing.

Plenty of clothing should be worn even in summer-time. Leather overalls are the best for general work, and sometimes it is possible for a pupil to draw a flying kit on loan. This can be supplemented in winter-time by woollen sweaters, mufflers and helmets. The hands and feet are the parts of the body most likely to be affected by cold. Big boots are essential, and with a combination of silk and woollen socks or stockings should help to keep the pilot warm. Goloshes or snow boots are also excellent, although somewhat clumsy. Many pilots object to the wearing of cumbersome gloves or boots on the ground that it interferes with the touch and feel of a sensitive machine; but in the event of their hands or feet becoming frost-bitten through insufficient protection, it may be remarked that they will have no feel at all. Fur gloves lined with wool are as warm as anything, and a fur flying cap, fitting close over the head, without ear holes, provides a suitable headgear and one on which it is possible to raise and lower the goggles easily. Sometimes a pilot takes two pairs of goggles with him on a very long flight in case one pair should get lost, for it is a very bad thing to fly without goggles at any time. This is especially so on tractor machines lubricated with castor oil, which is most injurious to the eyes. The goggles should fit well and admit no draughts. Those fitted with Triplex glass are the best because, in the event of a smash, there is less chance of the glass breaking and cutting the pilot's face or eyes. It is a good plan to carry a rag to clean off the oil and dirt that collects on the goggles and wind-screen from time to time, or the pilot may use the loose end of his muffler for this purpose. Newspapers provide an excellent protection against cold, and may be worn under the waistcoat or in trousers or boots. It goes without saying that damp footgear should be avoided at all costs, more particularly by those who are prone to chilblains and bad circulation. They may receive some comfort by greasing their hands and feet before starting.

One last word before the pupil takes the air. In view of possible forced landings, it is just as well to take plenty of money on the journey. This will not only make the period of waiting for relief more pleasant, but will also facilitate repairs if made on the spot with the aid of local motor men or carpenters, as well as the possible guarding of a machine by a farm labourer.

The pupil should know the telephone number both of the place he has left and of the place to which he is going, in order to ring up either aerodrome when he requires assistance. A pilot's ticket and photograph issued by the Royal Aero Club forms a useful means of proving his identity. Some form of identification should always be carried.

Fitness for Flying.

A pupil should never proceed on a cross-country flight if he does not feel physically fit, and he should have no hesitation in telling his instructor if he does not feel well. This also applies when the pupil is to make his first solo, as then he wants all his faculties and muscles working harmoniously, quickly and accurately together. There is no question of cowardice in a pupil saying that he does not feel fit or well enough to make a flight when in the early stages of tuition. The instructor will be able to judge from his previous experience of the pupil whether the man is really unwell or only pretending.

CHAPTER IX.

Cross-country Flying.

THE pilot is now ready to take the air on a journey from B to A. Before starting, he notices the time of the day, or sets his watch to 12 o'clock, or to the nearest hour, so as to facilitate future reckonings.

It is a good plan to climb to 1500 ft. or 2000 ft. before leaving the aerodrome, and then to set off the wind allowance, which can be compared with the course already found by calculation. This is done by taking some point on the line of flight already determined and one which is visible from the aerodrome. The pilot then flies on this line of sight and notes the reading of his compass, which will give him the course to be steered. This is a very simple and, at the same time, effective method of finding out the compass course without any mathematics or reckoning whatever. As an alternative, he can fly on his compass course, which includes his allowance for wind, and then note if it takes him along the line of country it should do on his map. If it does not, he must alter his course and note the bearing.


The Height to Fly.

Generally, when operating over friendly territory, any height between 2000 ft. and 5000 ft. is suitable, depending on the conditions of clouds, visibility and landing grounds and the highest portion of ground to be crossed. For instance, if a range of hills 1500 ft. high had to be crossed, and a start was made from sea-level, the pilot would not fly under 3000 ft. in their vicinity. An eye must be kept open continually for landing grounds, while the direction of the wind must be noted. Assuming that the machine has a gliding


THE HEIGHT TO FLY

angle of 1 in 7, in still air a pilot can select any landing ground within 3000 yds., or, roughly, something under 2 miles, from a height of 1285 ft. Therefore, the suitability of the ground that is to be flown over must, to some extent, regulate the height attained. In flying across the Channel or a very large city, a height of 10,000 ft. or more would be reached.

Having determined this question, the pilot then climbs slowly to the height at which he decides to fly. Avoiding clouds, either by flying under, over or round them, the pilot should, at any rate in his early flights, keep the ground in view the whole time, steering by compass and picking up landmark after landmark as

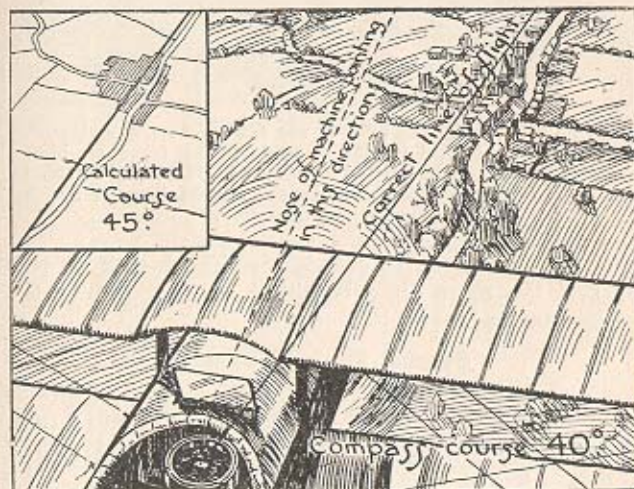

When the pilot has worked out his compass course, he can verify the accuracy of his calculation by flying by sight to a landmark that he knows is on his correct course, and checking the reading of the compass with his calculated course. In the illustration the pilot calculated his course to be 45 degrees, as shown in the small map inset. When he got into the air he found that his compass read 40 degrees when flying by sight on the correct line of country, i.e., to the first village. This indicates a gentle northerly wind, for which he had not allowed. The line of flight made good is indicated by the thick, black line.

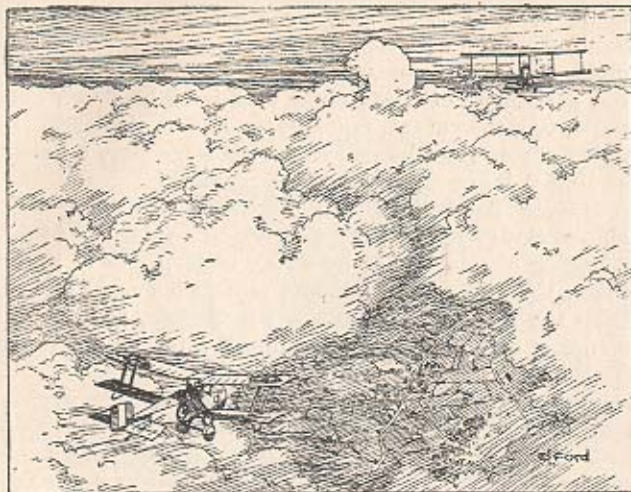

Flying in clouds. The pilot of the top machine is maintaining his lateral level by the cloud bank in front of him, although the ground horizon is obscured. The lower machine is descending through a hole in the clouds, through which the ground is visible.

each presents itself to his vision. The higher he goes at first the more difficult will it be to recognize the ground under him by the map.

Storms, Fog and Clouds.

There are many difficulties of various descriptions with which he may be faced. He may run into a rain, sleet, or hailstorm. These will generally be passed through, but hail may chip his propeller slightly. If a snowstorm is encountered, the best thing to do is to turn back or land at once. Fogs or mists should be avoided and a landing made at once when there is some danger of a pilot becoming enveloped in one. Heavy banks of clouds can generally be avoided, and for pupils this is the best course, for even the cleverest pilots are liable to lose their bearings in such circumstances. If a pilot should lose sight of the ground and yet have clear air above, the machine can be maintained on an

even keel by using as a horizontal level the very banks of clouds which hide the ground. Generally, these banks are more or less level, and, even if they are not, the pupil can take some well-defined cloud formation and maintain his position relative to it. If it is necessary for a pilot to fly through clouds or fog, he must watch his instruments most carefully and fly by them alone as best he can. He should brace his rudder square and try to keep his control lever central and vertical. If he is above the clouds and wishes to descend, he must first of all look round for any holes through which he can see the ground. In gliding down through these holes he must be careful to look out for other school machines which may be flying under the clouds. If there are no clear places in the carpet of clouds, he must select a spot where it seems to be thinnest and glide down through it quite steadily.

A Natural Gliding Angle.

Most machines will take up their natural gliding angle with the engine switched off, and only the slightest pressure on the stick is necessary to maintain them in a steady descent. A pupil will find that being in a cloud is very much like being in a really thick mist on the ground. Everything is damp and dark. In fact, in some clouds it is so dark as almost to prevent him reading his instruments. His aim should be to keep on his steady gentle glide until he sees the earth again. He should keep a careful watch on his altimeter, and if he gets to within a few hundred feet of the ground and there is no sign of the cloud thinning, he can reckon that he has been caught in a mist or fog, and had better climb again, get up over it and look for its limits, which may be in a down-wind direction. He must fly down wind by compass and try and overtake the advancing fog. He must also keep an eye on his petrol supply, for if he were forced to land in a fog through lack of petrol his plight would be even worse than if he had to land with the use of the engine, which might save him from running into houses or trees, seen

at the last moment. Ground mists and fogs are undoubtedly the most dangerous and treacherous enemies of the aviator. There is no particular difficulty in climbing through banks of clouds. The pilot can twist and turn his machine upwards through the clouds, always making for the brightest spot, until, sooner or later, he will emerge into clear blue sky and perfectly calm air. Quite often, really bad bumps are experienced in and near clouds, and it is these that may upset the pupil's idea of balance in climbing or descending, so that he may emerge from them in some unusual position, which will not matter in the slightest if he has sufficient height to right the machine again. Many pilots have noticed how their compass card appears to spin in a cloud, and they have attributed this peculiarity to electrical effects, although it seems more likely that it is their machine which is spinning, whilst their compass card is trying to point to the magnetic north during these evolutions.

When Clouds Obscure Landmarks.

It is much more difficult to study the ground when it is cloudy than on a clear day, because the pilot can only see little bits of road, railways or woods, and it may happen that the very landmark for which he is searching to give him his whereabouts is obscured from him. For the same reason, it is very much more difficult to fly across country and find the way when visibility is poor than when it is good and permits high flying. The pupil might think that the lower he flies the easier it is to recognize the ground; but the opposite is the case, because he does not want to recognize the ground house by house, or mile by mile; he wants to be able to see long stretches of road, river or railway, and to see how they curve and intersect at distances of 10 miles or 20 miles from his position. The further he can see ahead the easier he will find his map reading, and this means that he must have good visibility. After all, the map is a picture of the ground from a great height. He can see all his map at once, but he

cannot, unless he be very high and the visibility be excellent, see all the ground that it depicts. If he could, there would be no need to use a map at all. He would get up high over his starting point and would fly by sight to his destination, even though it was 50 miles or 60 miles away.

Atmospheric Conditions.

Another reason for flying fairly high is that the air will probably be much calmer there, and probably he will not be worried by heat or wind bumps. Early morning or late evening are the best times for flying, for the atmosphere is both cooler and calmer then. Heat bumps generally begin to manifest themselves soon after sunrise, especially in summer. To begin with, they may be within 100 ft. of the ground. They gradually ascend, until at mid-day they may extend to 2000 ft. or 3000 ft. high. Bumps are generally found in the vicinity of clouds and inland sheets of water, although at sea the air is usually calm. In fact, a wind from the sea is often a calm wind, in the sense that it is not bumpy, although it may be blowing strongly. Pupils should get used to flying in bumps as soon as possible, as the more they do it the less uncomfortable will they feel. In landing in a really strong and bumpy wind, it is a good plan to come down with a little extra speed, as they will have more control of their machines; but it must be remembered that, owing to the wind, the ground will appear to be coming towards the machine during the flattening-out process, very much more slowly than when landing in a calm wind, and the pupil must make allowance for this. Generally a pupil finds more difficulty in getting off in a strong wind than in gliding and landing. In landing in a strong wind in the vicinity of hangars, buildings or woods, the pilot must look out for sudden gusts and eddies set up by the wind striking these obstacles. These gusts may cause the machine to roll or drop 10 ft. or 15 ft. Hence the need for giving as wide a berth as possible to buildings whilst gliding down to land.


It is very unlikely that a pupil will be sent off on his

first cross-country journey under unpromising weather conditions. In all probability he will have nothing much to do except to steer his compass course, read his map and come down when he decides, landing in the aerodrome A just as he would at his own at B.

Taking Bearings.

Suppose that a pilot loses his bearings. There are a number of ways in which he can find his whereabouts. He should know where he is approximately by calculating his speed and the time he has been flying, and then searching the country indicated on his map at the approximate point on his course which he should have reached. If his whereabouts are not to be found by this method, he must then circle round some clearly-defined spot on the ground and try to recognize it on the map somewhere near where he ought to be at that time, bearing in mind that, as explained in the chapter on map reading, it is the inter-relation of landmarks and main features that is the easiest to recognize. Another method is to come down low and read the name of a railway station, which can be done from a height of 500 ft. to 1000 ft., depending on the light and lettering on the nameboard.

As a final resource, he may land and inquire the way. It may happen, however, that, although he lands in friendly country, he is unable to find out where he is from the inhabitants; either he may not understand the language, or else there may be nobody there to help him. He must then study his map, proceeding as follows:—He must first set off from a side line on the map an angle representing the variation of the compass (in England this is generally 15 degrees west). This line will be the magnetic north line. He must then twist the map round until the line that he has just drawn lies on the magnetic N. and S. line, as shown by the compass in the machine. This is called setting the map. He must compare the surrounding country with the map and try to recognize the landmarks. It may be the intersection of a road and river, or cross railway lines, or a town, church, range of hills or woods. He

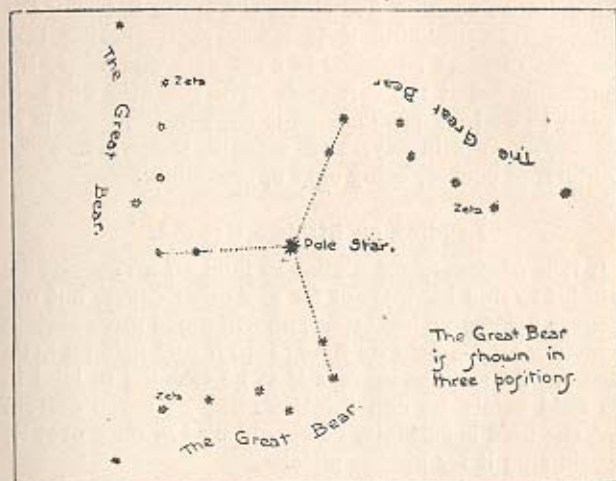

The position of the Great Bear constellation in relation to the North Pole Star.

must recognize these places on the map, and, from their bearings to each other, work out his own position. Sometimes he can find this by walking to the nearest road and reading a milestone or signpost.

If he is unable to use his compass to assist him, he must recognize two points on the ground and on the map, and then place himself between them. If he joins the line between these places on the map he will be somewhere on that line. By taking two more places in a similar manner, so that a line joining them on the map will be as nearly as possible at right angles to the first line he drew, he will discover his position at the intersection of the lines on the map.

To find the true north, the watch method already described is useful, whilst at night the north star is the best guide. This can be found by locating the seven stars forming what is called the "Great Bear," the "Plough," or the "Saucepan." The two end stars at right angles to the others are called the pointers, and the north star will be found in line with them, but

at a distance roughly five times the space between the pointers. In England it is worth remembering that the aisle of most churches is built east and west, the altar being set at the east end. The sun also will help a pilot to find his position, as it rises in the east, is at the south at mid-day, and sets in the west, these pointers, of course, being only approximate.

Landing on Strange Ground.

If it is necessary for a pilot to land off an aerodrome in order to find his way, or for any other cause, but not because his engine has failed, he will make more certain of hitting off his field by flying into it and using a little engine. As soon as he sees that he is going to land in the field safely he can throttle off. To make certain that the field is suitable, he should fly low once over it, scrutinizing it for hidden pitfalls.

Obviously, when landing on strange ground he should choose a field free from obstacles, for if he has to come in over trees or houses it will mean that there will be much less room for him to land. Here the best method of bringing down a rotary-engine machine may be described. The petrol tap should be shut, but the adjustable needle valve which regulates the mixture, and also the switch should be left alone. The sparking plugs will not soot up so readily when the switch is left on, and then, when the pilot desires to open out his engine again, he has only to turn on the petrol and his mixture is automatically correct, unless he has come down from a very great height, in which case a slight adjustment to the needle valve will compensate for the change in the density of the atmosphere. The rule is that the higher the machine is the more must the petrol be cut down, so that, on descending, he will have to give a little more petrol to correct the mixture. He should open out his engine at a height of about 1000 ft., and can then switch on and off until he is certain that he is going to make the field. Then, especially on a fast machine, he should leave the switch off altogether while completing the glide and landing.

In bringing down a machine fitted with the

Monosoupape engine, the switch is left on and the fine adjustment closed. The machine can be landed with the engine off and the fine adjustment is opened up to half normal running position for taxiing. The switch can be used if desired. In "blipping" an engine on the ground, a pupil should practise switching on as little as possible and allowing a long interval between the "blips." He should use as little petrol as possible, as it is obvious that, on a rotary engine (the only type where blipping is necessary), much less petrol is required to keep the engine running at intervals compared with that required to keep it running continually. Hence the fine adjustment must be half closed when the engine is being controlled on the switch. Even in the air, the object should be to use as little petrol as possible consistent with even running, and if the machine misfires or chokes, even occasionally, the fine adjustment lever must be altered to obtain perfect results.


Propeller Torque.

Sometimes during the last few hundred feet the pupil may use his engine the better to gauge his distance. In switching on and off, or, as it is commonly called, "blipping" an engine, either on the ground or in the air, the pilot will notice that the lateral balance of the machine is temporarily upset and that one wing will rise and fall as the engine is switched on and off. This is due to what is called the torque of the propeller. If the propeller revolves in a clockwise direction, judged from the pilot's seat, it creates an opposite turning movement of the machine, which will tend to revolve about its longitudinal axis in an anti-clockwise direction. Unless due allowance were made for this the machine would fly left wing down. But to compensate for the torque of the propeller more lift is given the left wing by increasing the incidence, or giving it what is called a "wash in." The greater lift allows the machine to fly laterally level, despite the propeller torque. When the engine is switched off for descending, the torque decreases, and so the left wing with the

greater lift will tend to rise momentarily. When an engine is being "blipped" on the ground, the same sideways rock of the wings will be noticed. When the engine is on, the wing will drop, to rise again level as soon as the switch is off.

Badly Trued-up Machines.

There is another point which the pupil must study whilst flying various types of machines. Sooner or later he will come across a machine which may not be perfectly trued up, either in the fore-and-aft line or else laterally. He may have heard of such-and-such a machine flying right wing heavy or right wing low. This means that the control lever has to be held over

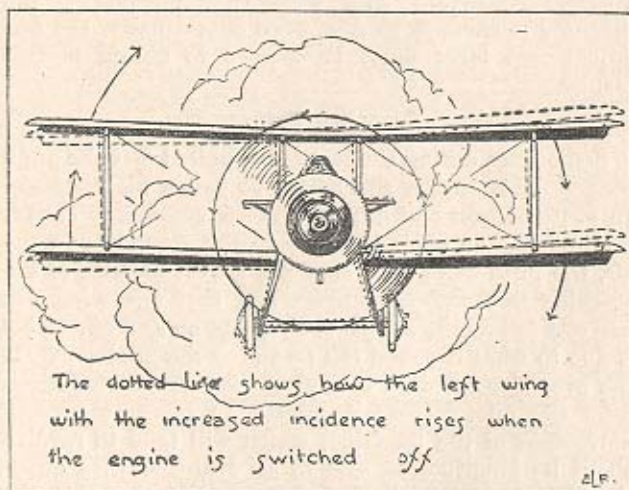


The torque of a clockwise-running engine or propeller (viewed from the pilot's seat) tends to make the machine turn in an anti-clockwise direction, i.e., to fly left wing down. This tendency is counteracted by a wash in or increase of incidence on the left wing, as shown by the blacked portion in the sketch. The dotted line shows what happens when the engine is switched off in the air, and causes the left wing to rise momentarily owing to the disappearance of the propeller torque.


slightly to the left in order to make the machine fly horizontally or laterally level. If the control lever were placed central for flying, as it ought to be in the properly trued-up machine (which should almost fly and glide itself, hands off), the machine would travel along right wing low. The cure for the trouble is either to increase the incidence on the right wing or to adjust the aileron controls. The same trouble might equally apply to the left wing.

Setting the Tail Plane.

A somewhat similar complaint results in the machine flying nose or tail heavy. If, in order to fly level in the fore-and-aft direction, the pupil has to hold the control lever forward with a certain amount of pressure, the machine is said to be tail heavy. The cure for this is to give more incidence to the fixed tail plane, which will correct the fore-and-aft balance of the machine. A

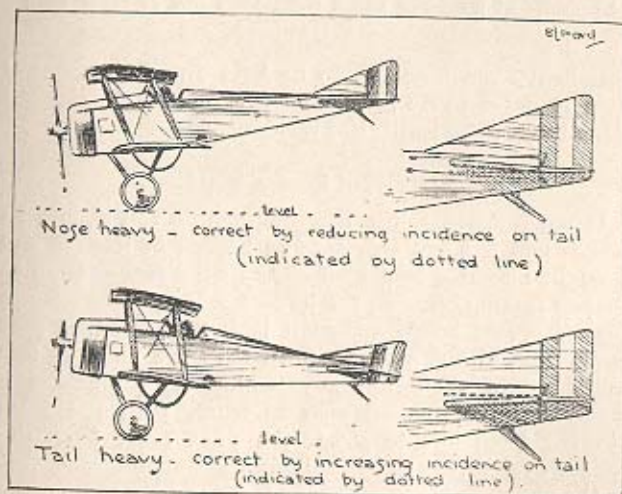

Examples of nose-heavy and tail-heavy machines, showing how to alter them by adjusting the incidence of the fixed tail plane. On some machines it is possible to vary the incidence of the tail plane in the air, and thus trim the fore-and-aft balance of the machine from the pilot's seat.

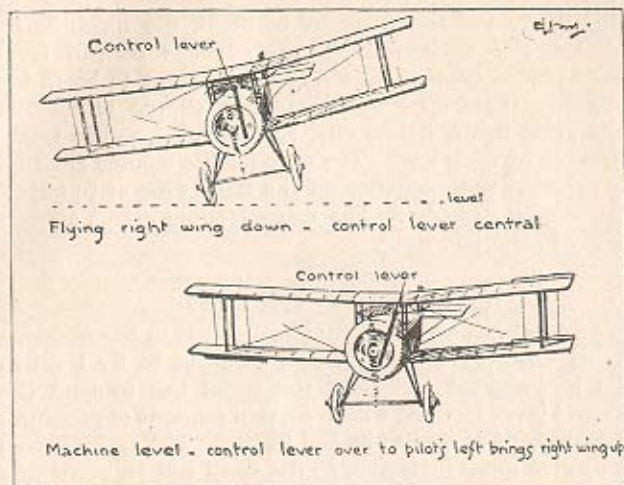

Examples of machines flying right wing low or right wing heavy.


nose-heavy machine has to be held up by the control lever in order to fly level, and is remedied by the tail plane being rigged with less incidence.

Restarting from a Field.

When restarting, the longest possible run should be taken, and if there are trees or houses at the far end it might be wiser to get off across wind rather than to chance getting off over the houses. It is quite easy to get off across wind, although it is a proceeding that pupils should not attempt until they are more or less confident in their flying capabilities. Supposing a machine is getting off side to wind, with the wind blowing from left to right, the pilot must keep the rudder over to the right, judging the amount according to the strength of the wind, and, fixing his eye on some point ahead of him, must steer his machine towards it, using right or neutral rudder and left bank, so as to attain this object. Once the machine is off the ground there is no particular difficulty in the manoeuvre,


and the pupil can turn into the wind as soon as he has gained a little height. It would be inadvisable to turn down wind until quite a considerable altitude, say, 1000 ft., has been attained, owing to the difficulty of bringing off a forced landing if the engine failed. In landing across wind, the same procedure is followed, the wing nearer the direction of the wind being canted towards it slightly, which almost has the effect of making the machine land on one wheel. In practising this, the pupil will notice that what really happens is that the drift, or crabwise motion, of the machine over the ground, due to the side wind, is compensated for by a slight inward sideslip, which allows the machine to pursue a straight course over the ground.

If there is ever any doubt about clearing an obstacle in getting out of a field, it is as well to remember that, by taking off weight, such as by shedding the passenger,

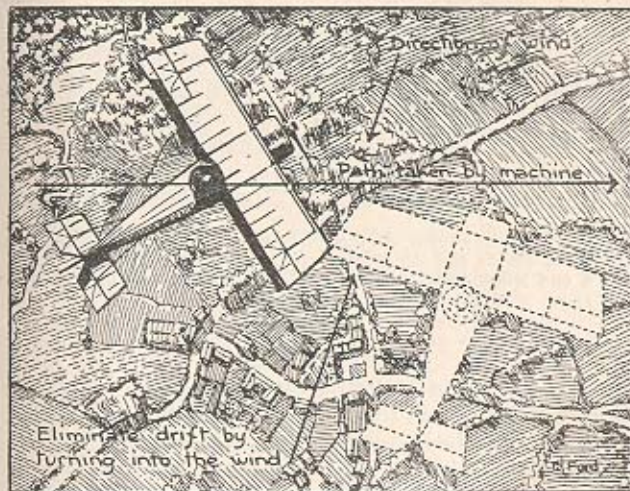

The course of the machine over the ground is often crabwise, owing to the effect of a side wind. When the pilot wishes to land into the wind he must eliminate the drift or crabwise motion by turning into the wind, as shown by the dotted aeroplane.

tools, cushions, or even running off some of the fuel, the machine will take the air quicker and a great deal of the "run" can be saved. All this may have to be done to prevent a machine having to be taken to bits and packed up as the only means of getting it out of a field. It happens sometimes that an instructor has to fly over to assist some pupil, and if the pupil is in a bad or

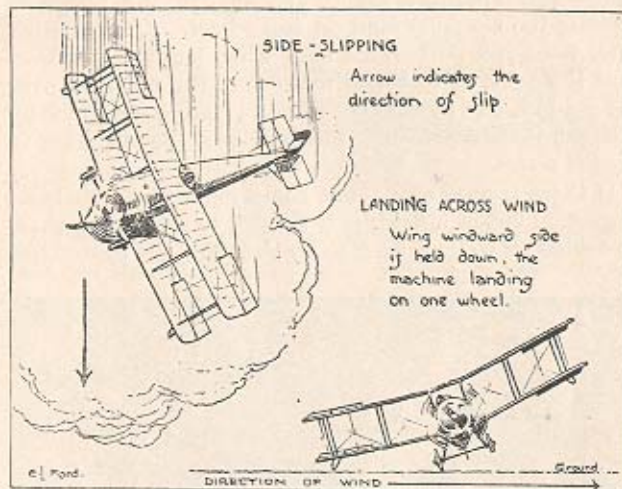


In the position shown on the left the machine will sideslip. Landing across the wind is rendered quite easy by landing with one wing down, and the sideslip into the wind which follows eliminates a crabwise course.

difficult field the instructor should not attempt to land there, but must pick the nearest suitable field. If he lands in a field when there is a doubt about getting out again, he can shed his passenger, get out of the field solo, and pick his passenger up again by landing in a more suitable field near by.

Before restarting in any strange field the pupil will do well to make a journey on foot to survey the ground in front of the machine. In extreme cases, crops or part of a hedge may be cut down in order to allow a

machine to get off safely. If a pilot is faced with a small obstacle, such as a hedge at the end of a small field, the best way is to taxi up to it as fast as possible, and then to pull the control lever back suddenly, when the machine will jump the hedge, even though it has hardly yet gained a flying speed. Sometimes it happens that a machine has to be got off in such a way that it travels through air which is sheltered from the wind. The pilot must allow for this, as the lift obtained from

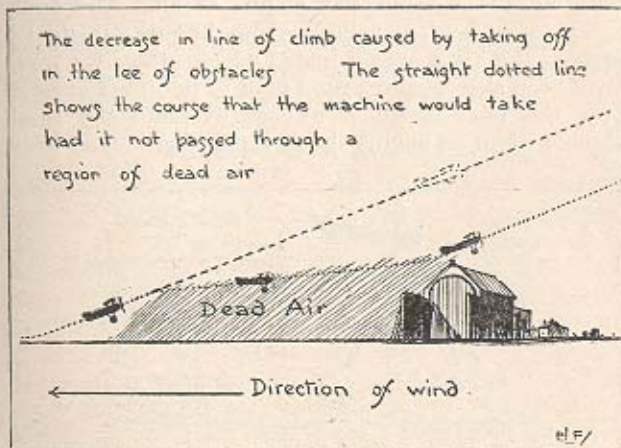


A point to be noted in taking off in the lee of obstacles. The region of the dead air which is shielded from the wind by the shed is shaded, and the course of the machine passing through it is indicated by the lower dotted line. The straight, upper line shows the angle of climb attained by the machine had it not passed through the region of dead air.

air in the lee of sheds or woods, where the air is comparatively "dead," is not nearly so great as the lift obtained if the machine could get straightaway into the wind. The same remarks apply to landing in a sheltered area where the machine will glide and run much further than might have been expected.

In landing in a field, the pilot should always aim to land at the near-side fence just grazing the hedge, so that he has the whole length of the field for his run.

In cross-country flying it happens sometimes that the engine fails and the pilot has to make a landing in strange country without its aid. This is called a "forced landing." One of the best tests of a pilot's skill is his ability to bring off a forced landing. Let it be assumed that the engine shows signs of giving out at a height of 3000 ft. A good axiom to remember is that it is far better to land with some engine, even though it be but four cylinders working out of eight, rather than to land without any engine at all. The power exerted even by four cylinders may be just sufficient to prolong the glide over a hedge which otherwise would have been short, or to help a pilot to jump his machine over the next hedge if he has overshot the mark. Hence, when an engine shows signs of gradually losing

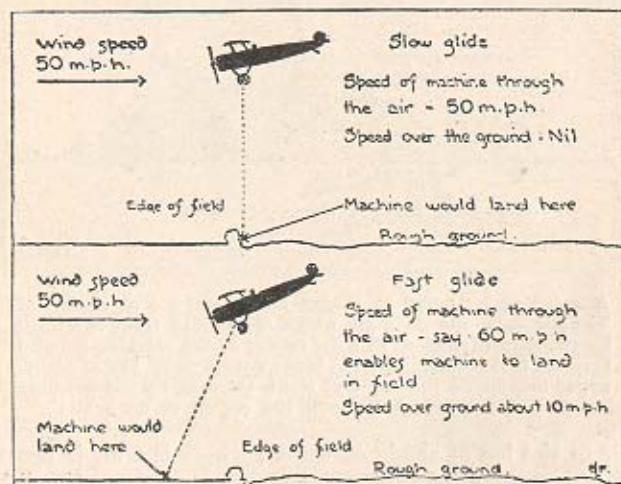

Landing in a wind. Illustrating why it may be advisable to nose the machine down more at a faster gliding speed against a wind than in calm air, if it is desired to land in a certain field. In this case the air speed of the gliding machine and speed of the wind are made the same, so as to illustrate the force of the argument. It is assumed in this case that at 60 m.p.h. the machine has a more efficient gliding angle than at 50 m.p.h. At 70 m.p.h. the machine would not glide so far.

its power, it is a wise plan to come down and investigate rather than trust to luck and wait for the engine to fail completely. On some engines it is by no means a rare occurrence for a partial seizure to take place. If allowed to go too far, this will cause the engine to stop dead, and it may be seriously damaged; but a landing can be made with half or three-quarter power at the pilot's control if the revolution counter be watched carefully and the sound and feel of the engine be studied. "Any motor is better than none," is worth remembering at all times. A gradual seizing-up of some engines, due to wear of the obturator ring, is indicated by the blueing-up of the four top radiating fins. This applies more particularly to the Gnome engine.

Making Use of the Wind.

Most forced landings are due to total failure of the engine. As often as not this is caused by quite a small defect, such as a broken petrol pipe, faulty switch, or defective contact breaker on the magneto. Sometimes one or two plugs soot up, but they may right themselves in the course of a few minutes; hence the need for the pilot gaining some elementary knowledge of the vital parts of his machine and being able to look over these points himself before starting. When an engine fails completely at a fair height, the pilot should switch off and turn off the petrol to prevent the possibility of fire, which is more liable to occur on a rotary engine than on a stationary one. The pilot then turns his machine into the wind. He does this automatically and accurately because he has always been noting the direction of the wind during a flight with a view to possible forced landings. He has been looking for smoke from rubbish heaps, haze over towns, steam from railway engines, flags, shadows of clouds moving on the ground, and, when close to the ground, the movement of crops or the foliage of trees. If a strong wind is blowing across the machine, it is nearly always possible for a pilot to watch his drift as he glides down, always turning his machine away from the direction in which he is being blown. He must also calculate the strength

of the wind, because, if there is a strong wind against him, his range of glide against it will be much shorter than if there were no wind. When a very strong wind is blowing he may have to select a field almost vertically under him, because the speed of the wind is approximately equal to the speed of the machine, which, in such circumstances, would descend vertically on its glide to earth. For this reason a pilot should have some idea as to what his most-efficient gliding angle is—that is, at what air speed the machine will glide the farthest. For the sake of example, let it be assumed that a machine has a range of flying speed from 40 m.p.h. to 60 m.p.h., depending upon the amount of engine used, and that 50 m.p.h. is its most efficient gliding angle. If the pilot brings the machine down either faster or slower than this speed he will undershoot his mark. Hence the importance of his knowing how to lengthen or decrease his gliding distance.

Fast and Slow Gliding Angles.

To reduce the idea to extremes, the machine would come down vertically in a nose dive at, say, 120 m.p.h., and it would also come down vertically, or almost vertically, if it were allowed to descend stalling at, say, 30 m.p.h. The net result would be approximately the same. If a pilot were gliding down slowly at, say, 45 m.p.h., with the view of decreasing his run on landing, and he saw that he was going to undershoot his field, he could reach it safely by increasing the speed to 50 m.p.h. (i.e., his longest glide), although he would be putting the nose down to do it. But if he were going to undershoot his field when already gliding at 50 m.p.h., his most efficient speed, he would undershoot it still more by putting the nose down and increasing the speed. He would also undershoot it if he decreased his speed by raising the nose and gliding below his most efficient speed. Sometimes, when in doubt, it may be wiser and safer to come down on the fast side and then hold the machine off the ground as long as possible, rather than to come down on the slow side with the possibility of stalling on the descent,

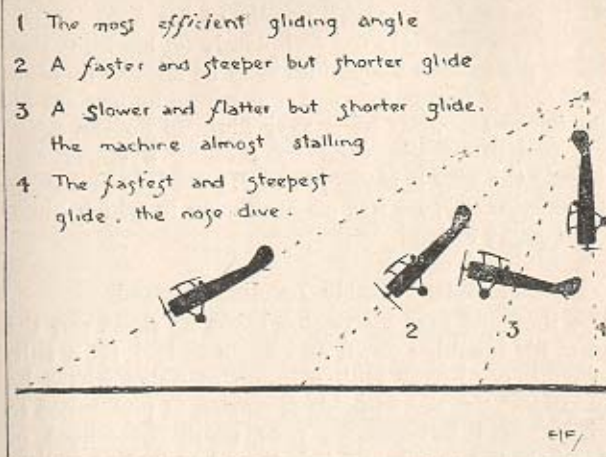



Diagram showing that the distance travelled over the ground in gliding is smaller whether the machine is brought down faster and steeper or slower and flatter than the most efficient gliding speed and angle.

especially when turning. This applies particularly to getting off followed by an engine failure near the ground. To turn back and land in the aerodrome necessitates magnificent judgment and skill, as the pilot will otherwise certainly stall, sideslip and crash. Therefore, the rule is that, in 99 cases out of 100, it is better to go on and land in a straight glide even on bad ground. Hundreds of pilots, even of great skill and experience, have crashed through failing to observe this golden rule. In fact, the more experienced a pilot is the more is he likely to think that he is able to perform the extremely difficult manoeuvre of making an about-turn down wind from a low height. Sometimes it is a wise plan, when an engine gives out over bad country, to turn down wind for the first few thousand feet of the gliding descent with a view to reaching better country, the length of glide down wind being, of course, very much farther than in any other direction. The pupil should then

turn into the wind at a height of about 1000 ft. or 1500 ft., in order to make certain of his field. However, he must not rely too completely on his altimeter, because the ground under him may be several hundred feet higher or lower than the spot where he last set his altimeter to zero. If he is very high up he can judge the direction of the wind by making a spiral and watching the way it blows him. By studying all these signs continually, he has no hesitation in which direction he ought to land.


Selecting Suitable Landing Ground.

The moment that his engine stops he must put the nose of his machine down and begin to look for a suitable field, or, better still, a group of fields where he may land. A group of fields is chosen in preference to a single field because he may easily overshoot or undershoot the mark, and it is therefore just as well to

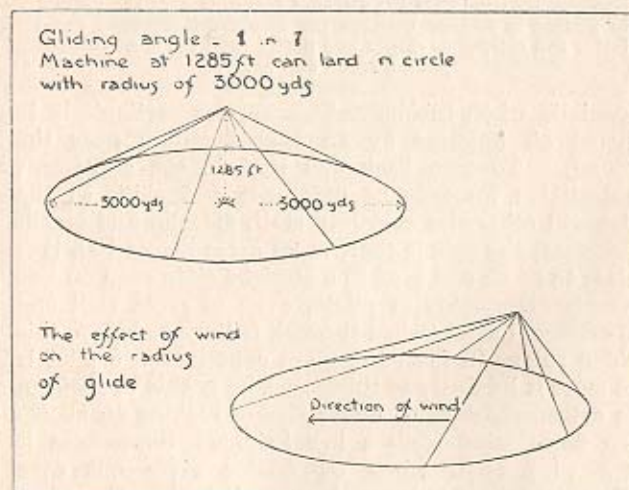

Top: Illustrating the radius of glide of a machine in still air. Bottom: Showing how wind affects the radius of glide, which is greater down wind, but less up wind. In each case the machine is supposed to be at the apex of the cone of glide when the engine is throttled down.

have alternative landing places. For preference, a grass field should be chosen possessing length in the direction of the wind, and without such obstacles as trees or houses surrounding it. A grass or stubble field, or a sandy beach makes the best landing grounds. Cultivated areas are generally comparatively level. Grass fields may have sheep or cattle on them and, naturally, look green from the air. Stubble is dark brown, a ploughed field looks black, and roots dark green. Golf courses can be distinguished by the yellow or brown patches formed by the bunkers. Plough, crops or roots are all bad, and only a pancake landing will prevent the average pilot from turning over. The golf course may be chosen if nothing better is at hand, and the same remark applies to parks and public recreation grounds. As roads and railways are generally bordered by telegraph wires, it is a bad plan to land near them,

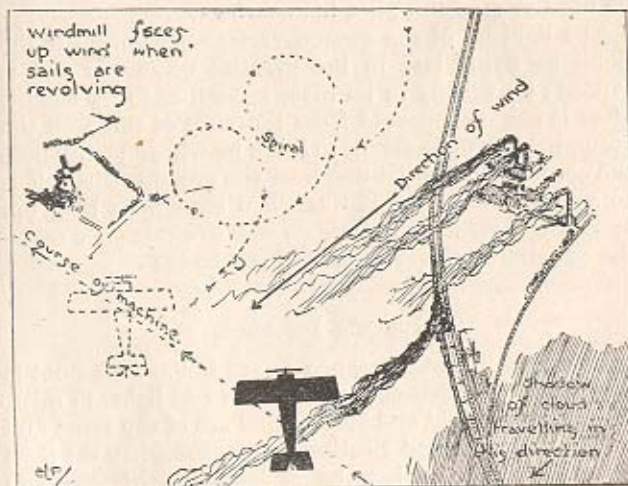

Methods of judging the direction of the wind from the air. (1) By noting windmills. (2) By watching the drift of the machine in a spiral. If there is no wind, the machine would spiral round a fixed point on the ground. (3) Smoke from chimneys, trains and rubbish heaps. (4) The drift of the machine near the ground. (5) The shadows of clouds.

as the wires cannot be seen until the machine is upon them.

Effect of Snow.

If the pilot is flying when there is snow on the ground it is practically impossible to pick out the kind of surfaced field desired. He can console himself with the fact that all the ground will probably be frozen hard, and the nature of the terrain is not of such importance as it would be under more ordinary conditions. He will find, however, that he will have to be more careful than usual in landing, as snow is very deceptive owing to the different lighting of the ground that it causes. Incidentally, he will find it much more difficult to recognize landmarks after a heavy fall of snow, as roads, railways, fields and villages are all included in one great camouflage. The same remark applies to extensive floods, which blot out distinctive bends in rivers that could be used to give the pilot his bearings.

The lighting of the ground varies enormously if the pupil be flying late in the evening while the sun is setting; he will fly in its rays, according to its height, after it has disappeared from the view of those on the ground. When he comes to earth he will suddenly note the contrast in the lighting near the ground, where it is so much darker than it was when seen from high up, and for this reason he would do well to circle once round the aerodrome to accustom himself to the comparative dullness.

Judging Distance.

Rules for judging distance are as follow:—A pilot is inclined to over-estimate distance in bad light, in mist, and when the field and background are of the same dull colour. He will under-estimate distance when the light is very good, or when he is landing with the sun behind him.

Another difficulty when landing is to tell from above whether the ground is level or not. This can only be seen when within 200 ft. or 300 ft. of it. Landing uphill means that the machine must be flattened out to

the stalling point with its tail well down. A downhill landing, which should be avoided if possible, means a very much longer travel before the machine comes to rest. It is a wise plan always to land the long way of a field, or, in some cases, to make the diagonal from corner to corner, as the extra bit of ground gained may make all the difference between a crash and a safe landing.

In the event of there being no field of ideal dimensions at hand, it may be necessary for a pilot to make a landing across wind. This is quite easily done, although it is not often practised in school flying. The method of doing this is described on page 157.

Making an "S" Turn.

In any case, the procedure for hitting off the field, whether it lie into the wind or across the wind, is the same. The aim of the pilot should be just to glide over the hedge or ditch on the near side of the field. To do this he will find that a process called "S" turning is most useful. This consists of making a series of "Figure 8" or "S" turns as he descends. By this method the pilot can always keep his eye on the objective, if necessary making several "S" turns over the same ground. In making these turns, he must always turn towards the landing ground, and during the descent he should study the field most carefully, noting the position of trees and watching for any obstacle on the ground, such as agricultural implements and heaps of rubbish. If a spiral were attempted instead it would be quite possible for the pilot to find himself half a spiral turn out, that is, facing away from the field, at the moment that he wanted to make his final glide into it from the last 200 ft. or 300 ft. "S" turns can be practised on any aerodrome, and they will be found very useful for future emergencies. As the ground is approached they can be made shorter and shorter until there is no doubt that the field will be made safely.


Another good method of bringing off a forced landing is to make a wide sweep into the field before turning into it. If the machine were falling short owing to the

distance having been misjudged, due to the strength of the wind, the pilot can turn in quickly and much earlier than he would if he wanted to use up space. The latter would be the case if he were overshooting the mark.


Another method used at times is to select a group of fields as before and to allow the machine to glide naturally towards it. When nearing the ground the pilot will have an excellent idea as to which field the machine is likely to hit, and, with a little control, he can help it to attain this end. The illustrations depict the various methods described.

Turning Near the Ground.

In turning near the ground—an unwise procedure at any time—great care must be taken to maintain the speed of the machine by keeping the nose down. Hundreds of accidents have occurred through pilots stalling their machines by turning too flat when trying

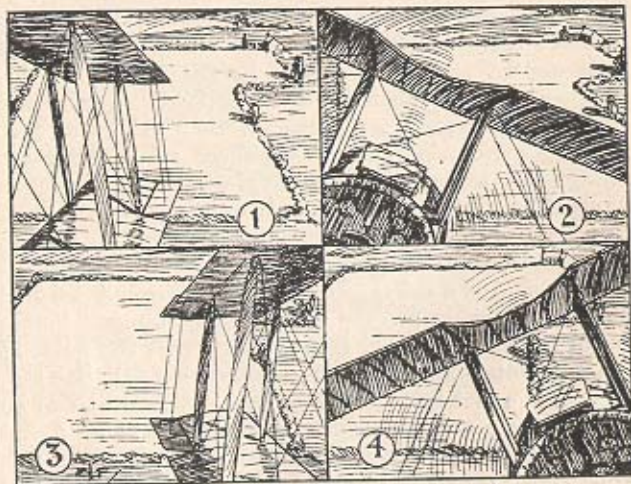

Showing how a pilot, by making "S" turns, can always keep his eye on his objective, i.e., the field he intends to land in (1) Right bank turning towards the field. (2) Nearly round. (3) Left bank turning towards field. (4) The left-about turn nearly completed.

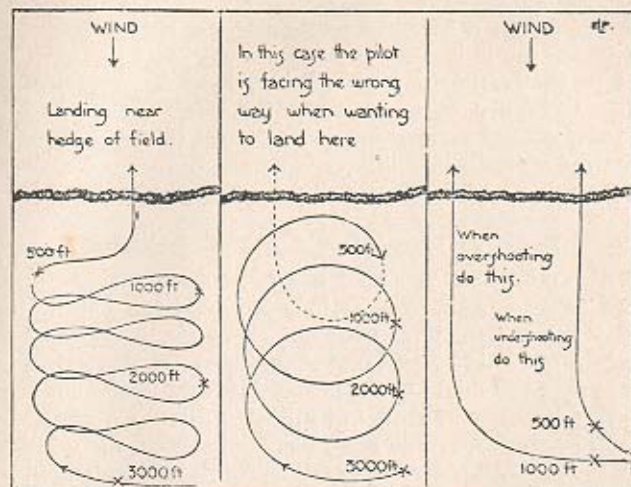

Points to bear in mind when landing in fields.

to make a forced landing and endeavouring to lengthen out their glide, or to avoid some hitherto unseen obstacle. At the same time, it is a good plan to land as slowly as possible in order to shorten the carry of the machine. A fast landing means a long run and the possibility of the machine hitting the hedge at the other end of the field. In order to avoid such an accident, the pilot should turn the machine away to one side while it is running along the ground after landing, but this should not be attempted when the machine has a good deal of way on it. A pancake landing can sometimes be made intentionally on bad ground. To stop a machine on the ground the pilot must get the control lever back to his chest, which brings the tail down and the tail skids into contact with the ground, where their added weight and friction soon slows up the machine. If this is done too soon, however, the machine may display a tendency to jump into the air again, and if it does this it may even pancake heavily. Pupils should remember to land slowly at all times, and especially is this necessary in hay, corn, plough, snow and marsh.

Here, again, a pancake landing is the safest method. Frozen ground is generally safe, but it must be remembered that a machine runs a very long way on it, and due allowance must be made for this. Incidentally, frozen ground is very much harder on a machine than thawed earth. The difference can actually be felt after a frost, especially when giving landing practice.


Steps to Take After a Forced Landing.

Assuming that the pilot has come down successfully—a creditable piece of flying, for even the best pilot may crash on a forced landing, because, even from a height of 1000 ft. or so, one cannot make absolutely certain that the field chosen is suitable, and he cannot see wire fencing, small dips or hillocks, ditches overgrown with grass, ridges and ruts, heaps of stones, mole hills, and even such things as small agricultural implements, any of which may be enough to overturn the machine—after landing, he should ascertain first of all what is the matter with his engine, and then telephone or wire to the nearest aerodrome or headquarters stating his whereabouts and describing the trouble. In stating where he is he should be able to say if there is a road near by suitable for the tender to use if one is being sent to salve the machine. When a pupil wishes to describe his exact position on a map, he can either give his bearings and distance from the nearest town, or from some obvious landmark, or he can report that he has landed on some letter in some place printed on the map, giving at the same time the map number and its name. Thus, if he said that he was down at the third "s" in "Sussex," or the "y" in "Canterbury," on Sheet 12 of Bacon's 2-ins.-to-the-mile road map, his commanding officer, having a similar map in front of him, would know his whereabouts exactly, and would instruct the breakdown gang accordingly. If he has damaged his machine in landing, he must inform his headquarters of all the damage. If he minimizes this, it is possible that the tender and the mechanics who may be sent out to his rescue with spare parts, owing to the insufficient information supplied, may not have

brought all the necessary spares, and a second journey may have to be made; hence the need for giving the very fullest details of the damaged parts and spares required. To do this, a pupil should know the correct technical terms for the various parts of an aeroplane and its engine. If the engine has failed it is always much more creditable if the pupil can diagnose the trouble and repair it himself. A broken petrol pipe, faulty switch or contact breaker, a sooted sparking plug, or even a broken valve can be replaced with the aid of a few simple tools, and such operations are worth attempting by a pupil possessing a certain amount of mechanical knowledge. If the machine is damaged, the pilot must take the necessary steps to secure it for the night. He must obtain assistance and move the machine, if this is possible, under the lee of a hedge, trees, haystack or house. The machine should be pegged down; that is, pegs are driven into the ground at each side of the tail and a little in front of each wing tip, taking care to insulate the rope from the wings and tail with sacking, straw or other material at hand.

Pegging Down a Machine.

The machine is tied up to the pegs, which must be driven deeply into the ground in case a strong wind should spring up in the night and blow the machine away. Some slack must be left in the rope or there will not be sufficient play to allow the machine to rock slightly in the wind. Some machines are provided with rings under the outer struts for the purpose of being pegged down. It is then wise to cover the propeller, engine, pilot's seat and instruments with tarpaulins or sacking in order to keep out the damp. Sometimes it is as well to remove such instruments as the watch and also the tools from the machine. If the machine is to be left out in a very strong wind, ruts may be dug to accommodate the wheels, the tail can be jacked up, and the elevator control lashed back, so as to present as little incidence to the wind as possible, and thus to prevent the wind overturning the machine. Additional ropes can be slung round the propeller.

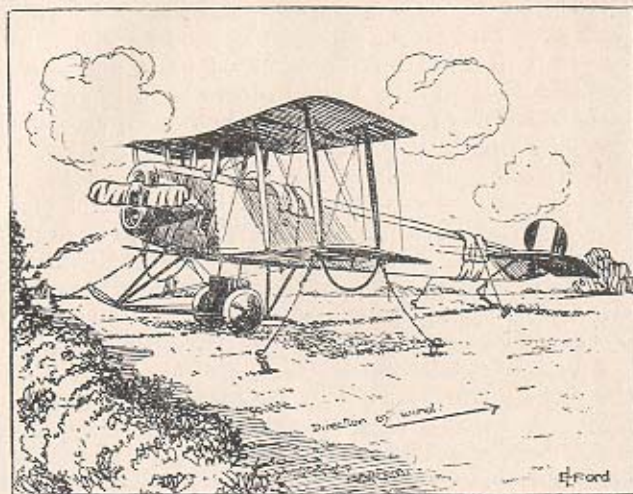


How to peg down a machine for the night. Pegs are driven into the ground at the wing tips and on each side of the tail. Wings and tail are secured by rope, but not stretched too tightly to the pegs. The controls should be lashed central, and if there is a wind the machine is left in the lee of a hedge or house. The propeller and pilot's seat can be covered with sacking or oilskin.

Having secured the machine and made arrangements for a guard—in England local or military authorities or special constables will undertake the work, and in France the civil or military authorities, such as the mayor of the village or the commandant—the pilot can depart to his temporary headquarters to await orders or the breakdown gang. He should inform the guard and also his C.O. as to where he can be found, or at what time he will be at such-and-such a rendezvous. If possible, he should give the number of the telephone or the name of the local post office or hotel.

Starting Up Without Aid.

If he has been able to repair the damage himself, he will be faced with the problem of restarting his engine. He must obtain chocks—bricks, fence poles, or blocks

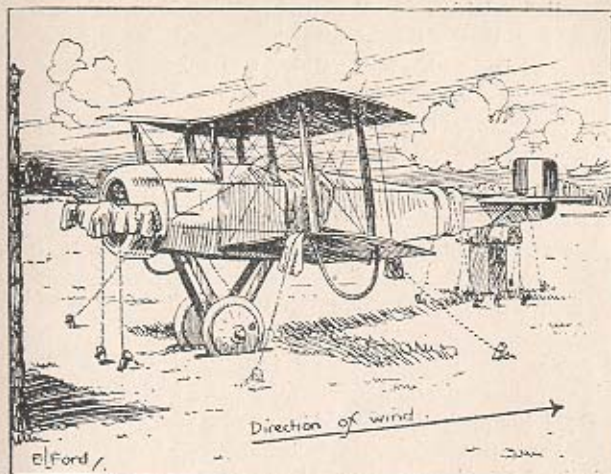

Special precautions necessary to peg down a machine in the open in a strong wind. Note trenches dug for wheels and machine trestled up in the flying position, so as to reduce the lift on the wings.

of wood being used for this purpose. If he cannot obtain such things, he can get the observers—and there are certain to be plenty of these about—to hold back the machine while he tests the engine. He should explain to them where they can lay hold of the machine, i.e., by means of the struts and as near as possible to their lower sockets.

Engine Starting Hints.

Some difficulty may be experienced in starting the engine. On a machine with a stationary engine which will throttle down well, the pilot can start it himself. The explosive mixture is sucked in with the switch off, and possibly a rag over the air intakes to the carburetter. He then walks round to the switch, putting this to contact, closing the throttle so as to allow the engine to fire at a very low number of revolutions; he can then start the engine in the ordinary way by swinging the

propeller. This operation presents no difficulties whatever, for the pilot should have practised propeller swinging during his early flying experience.

Swinging a Propeller.

Perhaps a word on swinging propellers may be of value at this point. Practise first with the engine off. The hands should be laid on the propeller about 4 ins. apart and about one-third of the distance from the tip of the propeller. The fingers should not hook over the trailing edge; a ring is liable to catch on this if the engine backfires, and should therefore be removed. It is not advisable to stand on muddy ground, as a slip might cause an accident. When the switch is put on contact the propeller should be swung fearlessly, making sure that the engine is taken over compression. If this is done there is very little chance of the engine backfiring, which it is far more likely to do if the propeller is swung in a timid and half-hearted manner. Generally, the throttle should be partially open: the more the throttle is open the greater the compression of the engine to be overcome. It is a bad plan to stand at any time in line with the propeller, as, for instance, when holding chocks. Some pupils have difficulty in finding out which way the propeller revolves, but if they think out how it is designed with a view to cutting its way through the air, they should be able to distinguish the entering edge of the blade from the trailing.


Starting a Rotary Engine.

On rotary-engined machines the method of starting up is not so simple. With local help, one of the onlookers may be taught to swing the propeller, or, alternatively, to switch the engine on and off as soon as it fires. There is, however, the chance that the inexperienced and probably highly-nervous farm hand, when in the pilot's seat, may lose his head, and, if there are no chocks, may run down the pilot, who is in the front of the engine after swinging the propeller. There-

fore, a tip is given to provide against this mishap. Tie the switch to a peg in the ground behind the machine, so that if the machine begins to move the switch will be pulled off by the peg. It may be mentioned here that the system on which a magneto switch works is to short-circuit the current, i.e., to make or complete the circuit. This is quite the opposite to a switch working in conjunction with accumulator ignition, where a switch is on when a circuit is broken and off when a circuit is made.


Importance of Clean Wheels.

If the pilot finds that he has landed in a very heavy stubble field, or in thick mud, he should see that his wheels are clean before he restarts, as otherwise the mud and dirt will collect on them and will then be flung up on to the propeller by centrifugal force, which may possibly break or chip it. This is indicated by the whistling noise which a chipped propeller makes in the air. If a machine becomes bogged, assistance may be

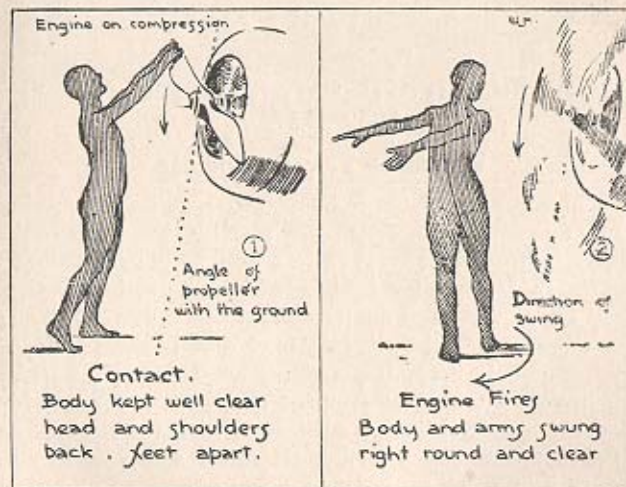

The correct position of the hands, feet and body for swinging a propeller.

obtained and men stationed under the wings to lift the weight off the wheels whilst the pilot races the engine to move the machine forward. The pilot must be careful not to overrun the men supporting the wings.

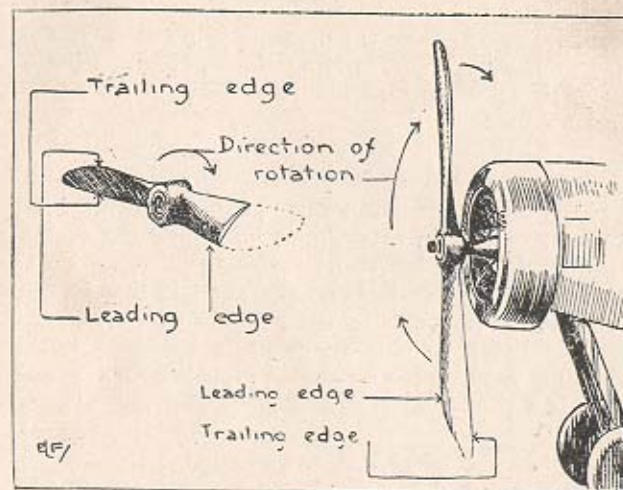

Showing which way the propeller revolves, a point of difficulty with some pupils.


Causes of Forced Landings.

The common cause for a forced landing is running out of petrol, possibly due to starting with the tanks nearly empty, to a leak, or to a pilot forgetting to keep up the pressure in the tank on a machine with pressure-feed supply. Some engines require doping or priming with petrol in the cylinders before starting. A dope-can, which is a small petrol squirt, should be carried on such machines when proceeding on cross-country flights; but if this is not at hand the engine can be primed by means of a rubber tube or a bicycle pump, or, in extremis, by soaking a handkerchief in petrol flooded from the carburetter and squeezing out the contents through the open exhaust valve or sparking

plug orifice. A petrol funnel can even be made out of a piece of paper, and petrol poured through it into the combustion chamber.

Warming the Carburetter.

In cold weather, or when a machine has been out all night in the open, difficulty may be experienced in restarting the engine. It should be noted that water-cooled engines should have the water drained off from

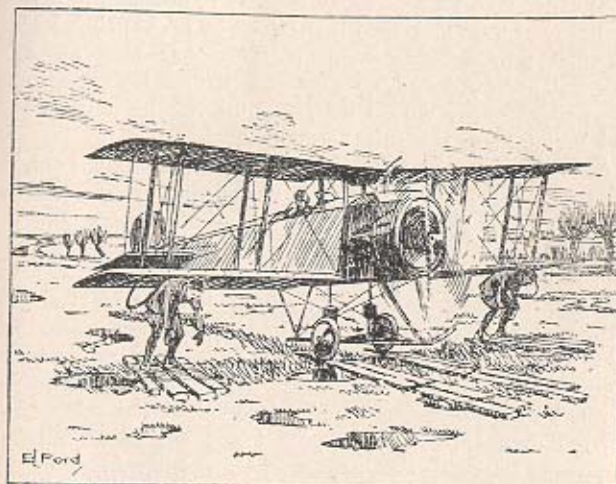

How to taxi a machine out of heavy ground. The pilot races the engine while the men lift under the main spars of the wings. Planks can be placed under the wheels.

all points before being left out on a cold night, or the water may freeze, unless a non-freezing solution of glycerine is used. In restarting, hot water should be put into the radiator, care being taken to see that all taps are turned off first. A hot rag placed round the carburetter and induction pipe will help to vaporize the fuel. For easy starting the engine may be primed and the sparking plug points placed close together, but not touching, although sooting up is more likely to occur under these conditions. In some engines one particular

plug may be liable to soot up. In this case it may be given an extra wide spark gap, the idea being that the engine can be started up on any of the other plugs, the cylinder with the big spark gap plug chipping in when the revolutions of the engine increase and the strength of the electric discharge at the plug jumps the extra wide gap.

Causes of Engine Failure.

Another frequent cause of trouble in starting is leaky induction pipes. A useful method of preventing leaks at such points is to wrap up the induction piping, especially the joints and unions, with insulating rubber or medical tape, which will prevent the ingress of air and hence keep the mixture correct.

A broken petrol pipe can be repaired with rubber tubing, a piece of which, the same size as the petrol supply pipe, should always be carried. Insulating rubber tape may be bound over the rubber joint and copper wire over the top, so as to make all secure.


It has already been said that the engine may show signs of giving up long before it fails altogether. This may be due to faulty lubrication, or, on a Gnome, to a faulty or worn obturator ring, which can easily be discovered by the blueing-up of the top steel radiating fins of the cylinders. A faulty petrol feed will cause a drop in power, probably accompanied by spluttering noises. Generally this will be due to the perishing of the india-rubber or composition used in the petrol pipe, which, accordingly, should be inspected from time to time, and renewed if there are any signs of the composition perishing or crinkling up on the inside. A choked jet is a more rare occurrence, but it is wise to see that the filter and the gauze below the carburetter are cleaned occasionally. The same remark applies to the oil sump and strainer found on many engines. These should be cleaned with paraffin occasionally. They must be taken apart and replaced with fresh gauzes if the old ones are cracked or broken.

A point worth noting when flying dual-control machines solo is to see that there is nothing in the other

seat to jam the control levers or rudder. Cushions should be strapped down. The belt should be fastened across the seat, and a suit case, if carried, should be roped up in such a manner that it cannot foul the controls.

Good and Bad Airmanship.

There are many other tips which the pupil-pilot will only learn by experience, but the probability is that, in the course of events, he will complete his journey

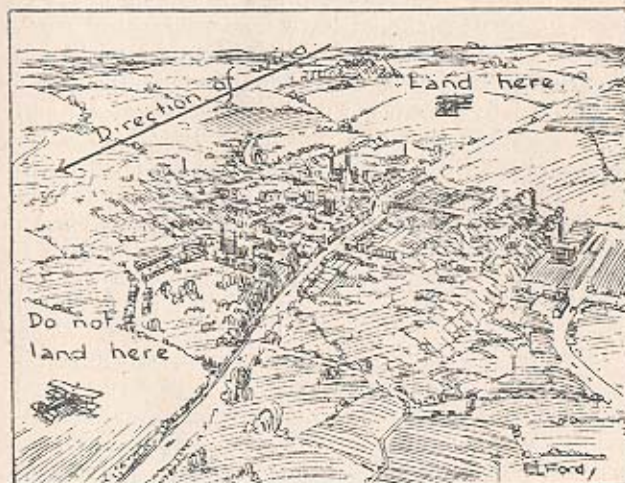

An example of good and bad airmanship. The pilot should land to the windward side of the town, so that in getting off again he has clear country in front of him.

successfully. An example of the kind of experience referred to may be given. The pilot has to land close to one or other side of a large town, the wind blowing from the east across the town. If he landed on the east side of the town, where the landing ground looked good, he would have to get off over the town, with a consequent chance of making a forced landing in the town itself if his engine failed; so he lands to the west of

the town instead, and thus has a clear line of country in front of him when he starts again.

A Landing and a Lesson.

Another case may be quoted where an experienced pilot would have saved his machine, whereas an inexperienced pilot wrecked his. In the course of a flight in the neighbourhood of an aerodrome, the switch on a Gnome engine machine failed, and the engine could not be switched off when the pilot desired to land. The pilot should have made certain of getting within gliding distance of the aerodrome and then turned off the petrol and glided home. Instead, he attempted to govern his engine on the petrol supply, with the result that he stopped it. He then saw that he would not reach the aerodrome, as the length of the glide of the machine, plus the amount that it would have been assisted by the engine being switched on and off in descending, was obviously shorter than the glide of the machine without the engine, so the pupil had to make a forced landing in some rough shingle, which he brought off successfully by pancaking. There was a strong wind blowing at the time, and in turning round, tail to wind, in order to get a long run to take off, he forgot the softness of the shingle and used too much engine, with the result that he attained too much speed, and, with his control lever too far forward, allowed the wheels to sink into the shingle, whereupon the wind got under his tail and slowly turned the machine over on its nose. It had to be dismantled and taken back to the aerodrome in a tender.


A point to bear in mind when taxiing down wind is that it is well to keep the elevator slightly down so that the wind keeps the tail low.

Another instance was that of the pilot whose throttle control lever broke. As is the case generally, the carburettor control was set so that, in the event of the control breaking, a spring would hold it wide open; thus he still had his engine, although it was running all the time at maximum revolutions. Now the pilot knew

that if he ran his engine for long at this speed it would almost certainly break down, so he adopted the ingenious plan of climbing the machine at maximum power and steepness to a great height, and then switching off the engine altogether and making a long, slow glide down again. He repeated this process again and again, and eventually reached his destination safely. A less-experienced pilot would either have run his engine all out all the time, or attempted to govern it on the switch, both of which methods might have ended disastrously. In the case quoted, the engine, when climbing on full load, naturally slowed down considerably, and so avoided the critical number of revolutions.

To restart the engine, should it stop when switched off, and there not being sufficient gliding speed to keep it going, it is only necessary to dive the machine steeply, when the force of air passing the propeller will generally restart the engine.

These examples might be multiplied, but they serve to show the kind of thing that makes the difference between good and bad airmanship.

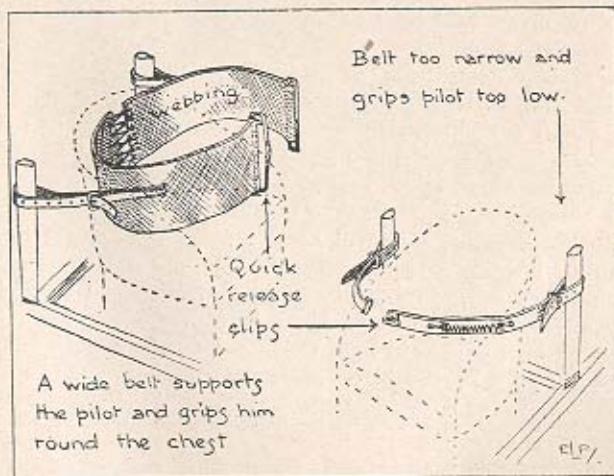

Two patterns of safety belts used to strap the pilot in his seat. The wide belt is far the better of the two.


The Homeward Journey.

In landing at "A" aerodrome, a pupil should remember to face the wind and land towards the head of the arrow if one is used. Sometimes a smoke flare is used to indicate the direction of the wind, in which case the pilot must land parallel to the smoke and towards the bucket from which the smoke is coming. Sometimes a kind of sausage balloon is fitted on the top of a pole for the same purpose. He should then taxi the machine up to the hangars and report himself to the duty officer and to the commanding officer, if necessary. Before returning, he should make certain that his petrol and oil tanks are sufficiently full, and take all the necessary precautions and preparations for the return journey that he did for the outward.

If the pupil is returning late and is in danger of being overtaken by darkness, or if he loses himself late in the evening, he must remember to begin looking out for a suitable landing ground before it is too late. Darkness may come upon him, if he is flying high, quite suddenly, so that he must be on his guard against this and come down and land when the conditions of light are still favourable.

It is a bad thing to attempt a long cross-country flight on an empty stomach, and this is especially the case in early-morning flying, or when the air is very cold. A good meal or a hot drink should be taken even before a short ante-breakfast flight.

Chocolate, tablet food or biscuits are good for taking during a flight, and will keep a pilot going for a long time; but it must be remembered that it is none too easy to dissect tablets from other articles and to withdraw them from the pocket. The best method would be to arrange them in a rack or ledged shelf in front of the pilot on the instrument board.

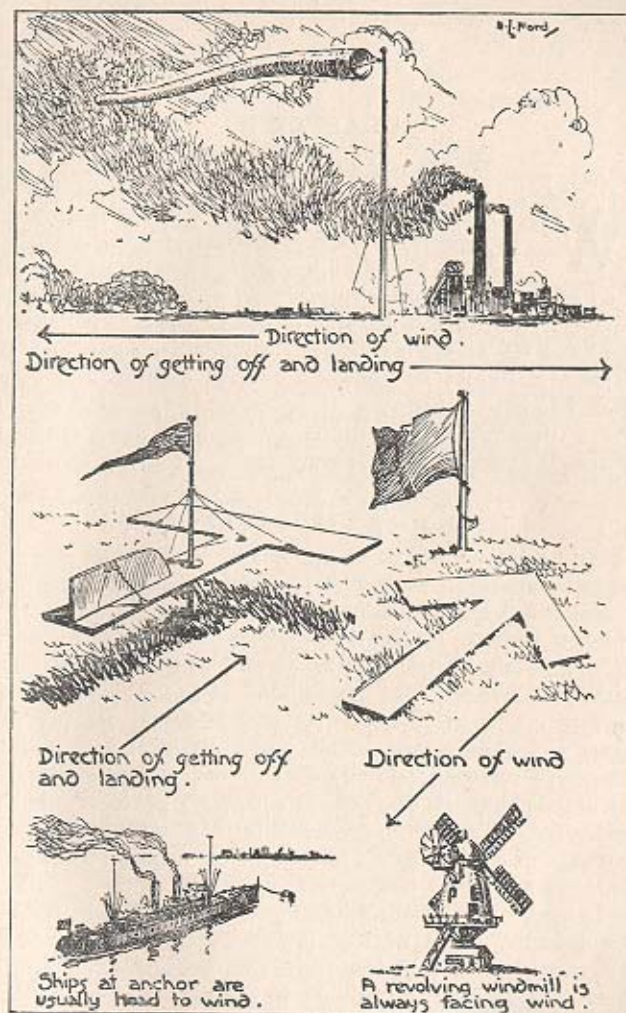

Various methods employed to indicate the direction of the wind and other signs which can be observed by the pilot, who, during all his cross-country flights, should pay particular attention and notice the direction of the wind.

CHAPTER X.

More Advanced Flying.

WHEN a pilot has reached a certain degree of proficiency, in all probability he will wish to practise fancy flying, such as, on occasion, he has seen more expert aviators perform. Although this fancy flying, or stunt flying as it is called, is excellent training for aviators who are intended for scout or war flying, it should be undertaken with caution and at a fair height. "Stunting" near the ground is at all times dangerous, and many good pilots have crashed through overlooking this warning.

An Ascent of 10,000 Feet.

Any pilot who is to attain fair proficiency should be able to make an ascent of 10,000 ft. while still in the pupil stage. There is nothing difficult or dangerous in such a climb. It merely requires patience and a certain amount of nerve to carry it through for the first time. Pilots who are unaccustomed to long climbs are apt to climb their machines less and less steeply as they get higher, under the mistaken impression that they are stalling, or inclined to stall, their machines. It is true that, on the other hand, they may be able to get better results from their machines by climbing them slightly in excess of the lowest flying speed. This can only be tested by the watch.

It may be mentioned here, perhaps, before going on to describe some of the fancy tricks that may be attempted at the higher altitudes, that when a pupil first goes up really high, i.e., in the region of 10,000 ft. or more, generally before landing again he should fly once round the aerodrome at 1000 ft., so as to accustom himself again to the appearance of the ground at this height. Owing to the difference in air pressure at

ALTITUDE AND MIXTURE


various heights, the pilot will do well to descend slowly, and if he notices any strange feeling in his head or in breathing, to swallow now and then so as to equalize the pressure of the air inside his head with that outside.

Less Petrol for High Flying.

As the atmosphere is rarer the higher he flies, he may find that he has to fly at a faster speed in order to get the best results. This is due to the pressure of air on the air speed indicator being less at heights for the same speed than lower down and nearer the ground. For the same reason he may notice that the carburation of the engine varies considerably, and he may find, too, that he will have to cut his petrol down in order to counteract the effect of the smaller percentage of oxygen in the air at considerable heights. This can be more easily done on a machine with a Gnome type engine, in which the petrol is controlled by a needle valve. If a hand control extra air valve is fitted, this can be opened to obtain a correct mixture. When descending from a height, the engine can be cut off altogether, to be started again at 1500 ft. or 1000 ft. by simply diving the machine, which allows the pressure of air again to revolve the propeller. As pointed out previously, when descending with a Gnome engine machine, it is wise to keep the switch on and turn off the petrol to prevent the sparking plugs becoming oiled up by superfluous oil flowing about the combustion chamber instead of being used up as it would be when running in the ordinary manner. On tractor machines it is quite difficult to stop the propeller in the air if any speed is attained; but in pushers the reverse is the case, and it is next to impossible to restart the propeller once it has ceased to revolve.


A Vertical Bank.

The high climb to 10,000 ft. which has just been described will be the first advanced test that the pupil will attempt. He can next try a vertical bank—a term applied loosely to all banks of 45 degrees or over.

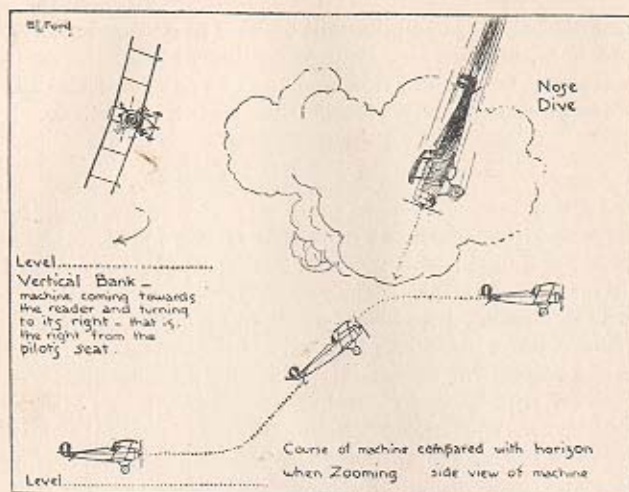

Vertical bank, a nose dive and zooming.

There is no particular difficulty in this manoeuvre: it is simply an exaggerated bank, and is performed by putting the control lever and rudder farther over than in the case of an ordinary turn. As the aeroplane is now on its side, the nose of the machine must be trimmed to the horizon by the use of the rudder. Top rudder will make the nose rise in relation to the horizon, and bottom rudder will make it descend. To make the machine turn, the control lever is pulled back and slightly over in the opposite direction to ease off the bank, because, otherwise, the bank would keep on increasing owing to the greater effect being exerted by the aileron on the outside wing which is moving so much faster than the inner wing. Thus the correct procedure, in order to make a vertical bank, is to put the rudder and control lever over in the desired direction, then to trim the nose of the machine to the horizon, in the case of a level turn, with the rudder over (or below the horizon if it is a gliding turn), and, as this is done, to ease the control lever back to make the machine turn,

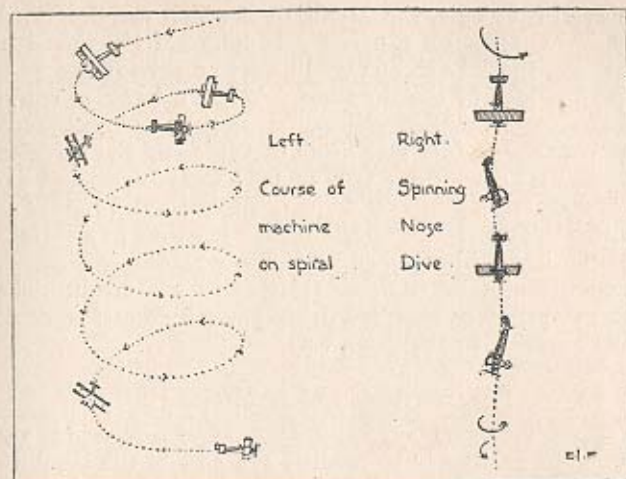

The course followed by the machine in making a spiral descent, and what happens in a spinning nose dive.

and slightly in the opposite direction to prevent the bank increasing. Now, to come out of the turn, it is necessary first to give the full opposite bank, and then, when the machine is nearly horizontal again, to give any opposite rudder that is necessary and to put the control lever central again and slightly forward. If the opposite rudder were given before the machine were nearly horizontal, the effect would be to make the nose rise and a stall might result. If he continues his vertical bank round and completes the circle, i.e. is in a fair way to attempt a spiral, for a spiral is a circular vertical bank made with the engine cut off.

Spiral Descents.

In making a spiral the pilot should always look downwards and inwards towards the centre of the circle that he is making. If he finds his angle becoming too steep, he merely takes off a little bank, or pulls the control lever back slightly if his descent is too rapid. He can judge of the accuracy of his spiral by watching

his string or tape, the operation of which was described in the chapter on the instruments. If the spiral is correct, the tape should trail back in a perfect line with the fuselage of the machine. When a bank or spiral becomes extremely steep, a curious phenomenon occurs: the rudder acts as an elevator and the elevator as the rudder. This is a somewhat loose way of expressing what happens, for if one regards the rudder as a controlling surface operating the machine in a certain plane, it will always control the machine in this plane, regardless of its position relative to the earth. The elevator may be regarded in the same light and controls the machine in the same way.

Inversion of Controls.

This inversion of controls is really due to the different positions assumed by the nose of the machine relative to the horizon. When one is flying level, a backward movement of the control lever makes the nose of the machine rise above the horizon; but if the machine is on its side, as it would be in a vertical turn, the same movement of the control lever makes the machine turn more quickly. In each case the nose of the machine is trying to reach the tail—an extreme instance of this being the loop. In the same way, left rudder will always make the nose of the machine try and meet the left wing tip, but if the machine is on its side, say, in a left-hand turn, left rudder will make the nose of the machine drop below the horizon, although it is still trying to reach the left wing tip, which is, of course, underneath.

"Zooming."

The next trick he can practise is the "zoom," or the sudden jump of the machine several hundred feet into the air after flying near the ground. First of all he must remember that he cannot effect a zoom until he has got up full speed, for it is only the surplus speed that allows the machine to climb so steeply and suddenly. The manoeuvre is performed by pulling the control lever back suddenly, which causes the machine


to climb very quickly and steeply, and then putting it forward again when the machine has practically reached the stalling speed, as indicated either by the air speed indicator (which is a bad sign owing to its amount of lag) or the general "sloppy" feeling of the controls. When a pilot notices this peculiarity at any time in the air he must beware, because it means that the machine has lost its flying speed and will stall the next moment unless he pushes the control lever forward and allows the machine to regain its velocity.

Nose Diving.

The nose dive is the opposite to the zoom, and is performed by putting the control lever forward. It is wise to cut off the engine before making a nose dive, because this minimizes the strain on the whole machine. Nose dives should not be attempted too near the ground, and a pilot should not attempt too steep a dive to start with. He should see, too, that his belt is tight, as otherwise he may notice a tendency to slip through it on to his controls and instruments. He should also make certain that his goggles fit well, as if there are any air leaks in them they will cause his eyes to water and consequently blur his vision. He will do well to bring the machine out of the dive at over 1000 ft., in order to allow plenty of room for eventualities. To do this, he should pull the control lever back firmly but not too rapidly. He will feel the machine levelling up, and as the air speed indicator does not register as quickly as the machine changes position, he must not centre the stick until the instrument shows him that he is somewhere near his lowest flying speed. A nose dive can easily be followed by a zoom if the pilot pulls the control lever back rapidly.

Looping.

Should he do this, and should he, in addition, put his engine on full at the same time as he pulls back his stick to the limit, he will, in all probability, loop, although this is not by any means the safest or best method of performing this very simple but, at the same

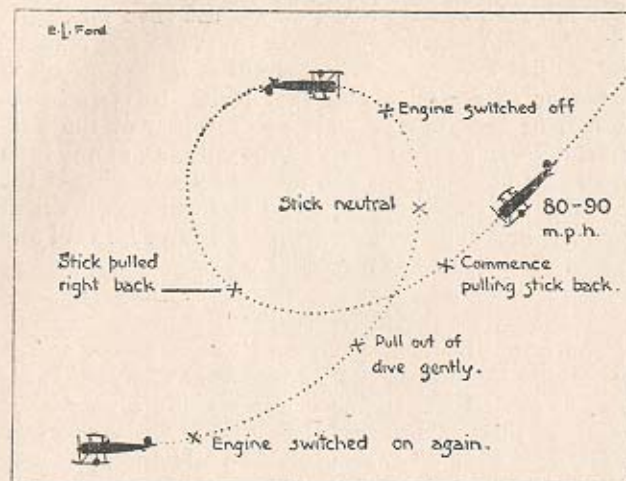


How to loop the loop.

time, very effective manoeuvre. A pupil who wants to loop should select a machine that is known to loop easily, such as an Avro or B.E.2c. He then ascends to a height of 3000 ft. or 4000 ft., gradually puts the nose of the machine down to a speed of 80 m.p.h. or 85 m.p.h. (75 knots or 80 knots), attaining this maximum by a more gentle descent than would be possible if he attempted to nose dive to this speed. He then pulls the control lever as far back as it will go, in one firm, strong pull, the effect of which is to cause the machine to rear vertically upwards and over. When he is upside down, he will see the ground below him and must then cut off his engine and a few moments later ease the stick, gradually centring it. The engine can be switched on again when the steepness of the nose dive has been materially decreased. The first part of the pull-back should be slower than the latter, on account of the greater speed of the machine in the early stages of the loop. The control must be held back until the machine has completed the loop.

Before looping, the pilot should see that the machine

is perfectly trued up and that all the wires are correctly adjusted. He should also make sure that his belt is strong enough to hold him, in case he should make a bad loop or stall in a more or less upside-down position. If he did a correct loop there would be no need for him to wear a belt, as the centrifugal force of the manoeuvre would pin him to his seat. It is dangerous to have anything loose in the front seat of the machine, and such things as cushions should be removed before attempting any of these evolutions. In looping a machine like the B.E.2c the pilot must brace himself to keep the rudder bar level, and also to pull the control lever back straight and not to one side, or else he may find that he will not come out of the loop square. In looping some machines in which a rotary engine is fitted it is necessary to use rudder to counteract the effect of engine torque when the engine is cut out, consequently

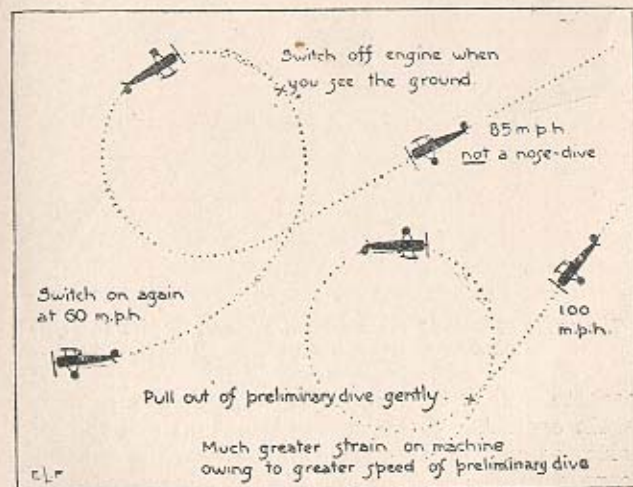


Showing the right and wrong way of looping. It is a much bigger strain on the machine to pull it up for the loop after a steep dive than after a gentle one, where the necessary speed is attained gradually.

it is advisable to practise on a simple type of machine first. Looping is generally done into the wind.

Tail Sliding and Spinning.

Another favourite trick of experienced aviators is to stall, or tail slide, the machine at a fair height and allow it to flutter down some distance. This is done usually by cutting out the engine and pulling the control lever back. The machine then loses its flying speed and falls over on one wing or slides back tail first. If the nose is put down or the engine restarted, the

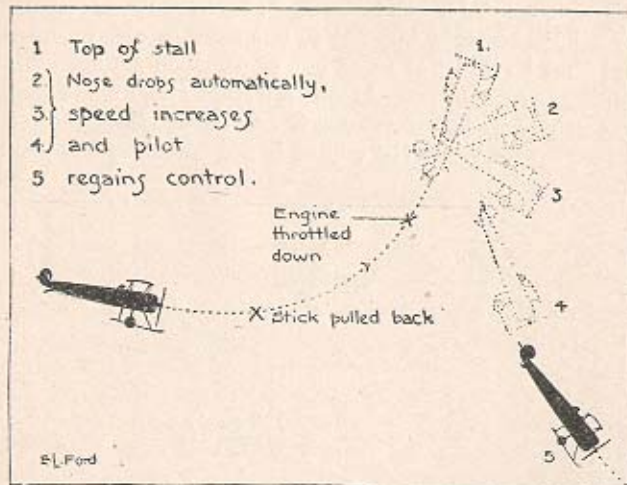


The effect of stalling the machine, a perfectly safe and easy manoeuvre given the necessary height.

machine will gather speed again and the pilot will regain control. If the engine is cut off and the pilot holds the control lever back all the time, he will come down in a series of stalls and their ensuing dives.

A tail spin, sometimes performed unintentionally by inexperienced pilots, is another stunt practised by skilled aviators. Sometimes it is achieved in conjunction with a nose dive, in which case the evolution goes

by the name of the spinning nose dive or corkscrew spiral. What happens in this case is that the pilot stalls his machine, pulls the control lever towards him and fully back. He does this with the engine off, and then rudders hard in the direction in which

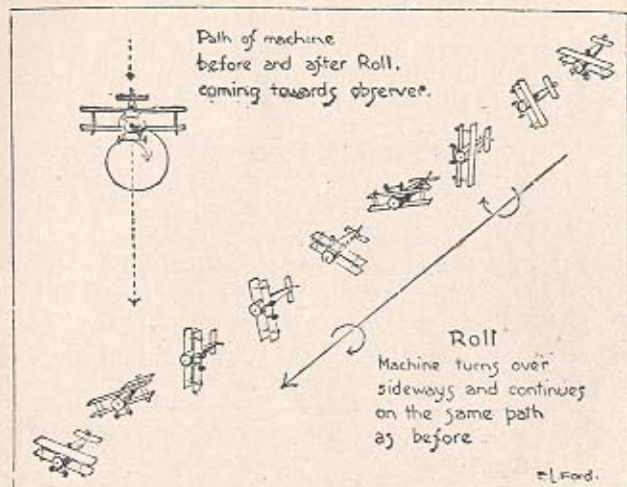

The various positions in a sideways loop or roll.


he desires to spin. He can get out of the spin, if he has sufficient height, by placing the controls—rudder and stick—central, whereupon the machine will take on a nose dive, when the engine can be restarted and the flight continued in the ordinary manner. Pupils who find themselves in a spin unintentionally must remember this. It is generally found that a pupil will get into a spinning nose dive through making a faulty spiral on certain types of machine on which the area of the stabilizing tail fin is too small.

In stunting rotary-engined machines the gyroscopic effect of the engine, which causes the nose to go up if the machine is turned in the direction of engine rotation, and vice versa, will be noticed.


The roll, which consists of making the machine loop sideways and continue in the same direction as it was travelling before the manoeuvre, is done with the engine on or off. The pilot puts on speed and then pulls the control lever back as in a spin, and kicks on full rudder in the same direction in which he wishes to roll. To sideslip—which means that the machine descends sideways much more rapidly than it goes forward—full bank is given in the direction in which it is desired to slip whilst rudder is held off.

Rolling and Staggering

An evolution that is very easy to perform consists of making the machine take on a rolling and pitching movement by working the control lever round and round in a circle and ruddering accordingly, i.e., giving a left rudder when the control lever comes round to the left, and right rudder when it comes round to the right. The effect on the machine is to make it stagger and see-saw like a drunken man.

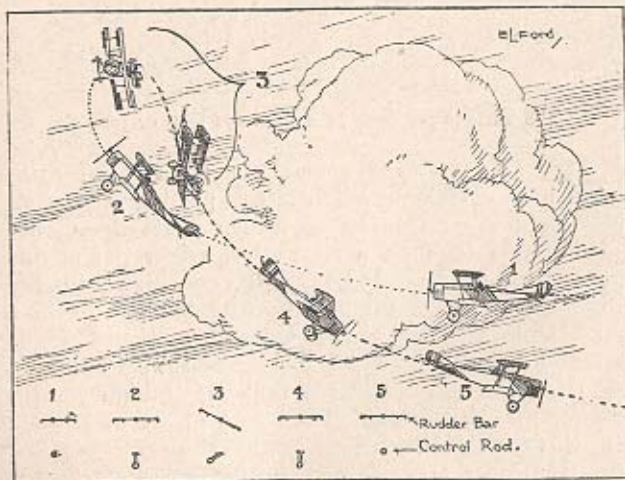

The Immelman turn, in which the machine rears up, turns sideways over the vertical, and comes out facing in the opposite direction. Below are shown the movements of the control lever and rudder bar required in making this manoeuvre.

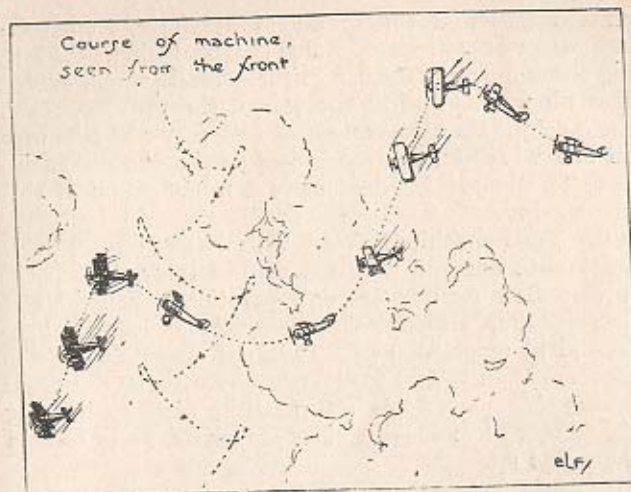

The falling leaf descent and engine cut-out, seen from the front and sideways.

"Cartwheel," "Immelman Turn," "Boot-lacing" and "Falling-leaf" Stunts.

Another variety of stunt is termed the cartwheel, which can be mistaken for a loop, in certain circumstances, by spectators on the ground. It is performed by getting up a little speed, by putting the control lever forward and then pulling it back, as in a zoom. When the machine is almost standing on its tail, but before it has lost flying speed and controllability, apply rudder and bank in the same direction. The machine will answer to the controls, cartwheel in the air, and come out facing in the opposite direction. A slight modification of this manoeuvre results in the famous Immelman turn. The engine can be cut out when the machine turns about, and will allow it to dive, but if this stick is held fully back the machine will come out of the dive quite easily. This manoeuvre can be done with the engine off, the necessary momentum for the ascent and cartwheel turn being supplied by diving. When the machine is pulled over, first on one side and then

on the other, in the course of a long descent, the manœuvre is sometimes called "Boot-lacing." Stalling turns are very similar to these manœuvres, except that all way is lost at the top of the pull-back, and the machine then drops its nose suddenly and falls over on one wing tip, and so comes under control again. The "Falling-leaf" descent is a modification of this manœuvre.

On some machines fitted with large rudders it is possible to descend with the control lever right back. A very slow stalling descent, practically vertical and flat, results, although speed must be increased to normal in order to land. It is not easy to keep the machine from falling over on to one wing or the other during this manœuvre, but it can be done by working the rudder more roughly than ordinarily, so as to hold the wings up.

A Flat Turn.

A very quick method of turning is attained by switching off the engine momentarily and kicking on full rudder, and then centring it. The machine will drop most of its flying speed and turn round through about 90 degrees. Indeed, it would continue round and get into a spin if the control were not centred again. In a spin on some machines, the lever must be pushed forward beyond the centre position. Upside-down spinning has also been performed, in which case the control is reversed, as it would be in upside-down flying, which has been done on certain types of Service machines.

In all these evolutions it is a common occurrence for a pilot to get into the "wash" of his own machine, so that he should not be alarmed if he experiences sudden gusts and bumps during these displays, for they are only caused by the air disturbances created by his own machine and the small amount of air space in which he is manœuvring.

Trick fliers at exhibitions have sometimes done such things as under loops and flying upside down; but the machines are generally specially constructed and

strengthened for such work. Provided that they allow themselves enough height, there is practically no positional manœuvre which it is not possible to perform on a machine, or from which the machine will not right itself—generally more or less automatically.

Opinions are divided as to the advisability of allowing pupils to attempt the easier of these air tricks; but, provided they are high enough in the air, such practice not only gives them added confidence in themselves and in their machines, but also undoubtedly makes them better pilots. A pupil should obtain his instructor's permission before he attempts even the simplest of these manœuvres.

Safety in Height.

For war purposes and aerial fighting, the man who can manœuvre his machine the quickest obviously stands the best chance of downing his adversaries. On the other hand, no stunting near the ground or over bad country at low altitudes should be attempted, for, sooner or later, the pilot will miscalculate his speed or distance, or else his engine may fail when he is at a critical angle, and he is unable to right himself before he crashes into the earth. More than one pilot has been severely injured or even killed through taking unnecessary risks such as these, or in his desire to prove himself a finer pilot than a rival. If any useful purpose were to be served by such displays, then by all means let them be attempted, even though the risk be great; but when it is only a matter of personal rivalry, or display before an admiring crowd, then such tricks are sheer foolhardiness.

CHAPTER XI.

Night Flying.

THE question of night flying may now be discussed, the pupil having already been taken through the various stages of school flying until he may be considered to be tolerably expert. Incidentally, it may be remarked that even the finest pilots are constantly learning and adding fresh knowledge to their minds gathered from the hard school of practical experience.

Night flying has often been regarded as a dangerous pursuit, probably owing to the number of accidents that occurred when it was first attempted on a large scale under unsuitable conditions. The lessons taught by these accidents have brought about a greatly-improved state of affairs, and there is now no particular danger in practising night flying. This is a very different matter to undertaking a night flight under bad weather conditions against hostile aircraft.

Aerodrome Lighting.

The first thing for a pupil to remember is not to attempt to fly at night until he can land a machine by looking at the horizon, i.e., by looking ahead for a distance of at least 100 yards. At any time it is a mistake to watch the ground close under the machine, where it seems to be travelling very fast, and where an idea of the height that the machine is above the earth is difficult to estimate. In night flying this mistake must be absolutely avoided. As petrol flares are usually arranged on the night landing ground in the form of the letter "L," one can take the tail of the letter as the horizon in this case, and the long side as showing the extent of the landing ground and the direction in which to land.

NIGHT-FLYING MACHINES

The next point concerns the machine. Practically all night flying done in England is done on stable machines, i.e., a machine that will practically fly, land and bank itself automatically. Obviously, the strain of flying at night is much reduced by the use of such machines, which are also capable of automatically righting themselves if they should get into a dangerous position.

It is a good plan for the prospective night pilot to practise flying and landing at dusk. He can then carry on with his flying later and later, until, when he gets a fine moonlight night, he will notice little or no difference between his flying conditions then and at dusk; indeed, many pilots think that dusk flying is more difficult owing to the rapidly-changing light. It is also obvious that he must know by heart his own aerodrome and any traps there may be in getting off or landing. He can familiarize himself with other aerodromes in the neighbourhood.

Daylight Practising.

It goes almost without saying that a night pilot must become familiar with the handling of his machine by day before attempting to fly at night. This remark applies almost to any piece of mechanism, for the more the man and machine are one or in sympathy, the better will be the results obtained from them. Therefore, the night flyer should practise all day what he intends to do at night on the identical machine he will use. The machine should be rigged in such a manner that it will climb slightly if the control lever is let go. The object of this is that the machine will fly at a more or less uniform and medium speed. It should be adjusted to fly level with the throttle half shut. In practising for night flying by day it is a good plan for the pilot to watch his instruments more carefully than he would for daylight flying. He can practise watching his side-slip and air speed indicator and correct the machine by these. He should also watch his altimeter creep up or down according to the variation in the height of the machine, and note how it lags when the machine descends rapidly.

Getting Off at Night.

In getting off at night it is very important for him to remain stationary for at least one minute at the end of the L lights, facing the short bottom end of the L, which will indicate the length of his run and impress on his mind the lie of the landing ground which he will have to use when he returns. He should count the number of lights and calculate the distance allowed him. He can also take note of any particular obstacles near at hand which he will have to avoid either in landing or getting off. In getting off he must be very careful not to swing. If possible, he should fix his eye on some distant light to steer for, and he should never attempt to turn under a height of 500 ft. or 1000 ft. He should not take the machine off the ground, but, instead, he should allow it to fly itself off. This is very important indeed. He can practise this by daylight and will find it quite a simple operation. The proper time to leave the ground is the moment when it is difficult to hold the machine down any longer.

Keeping the Flares in View.

In the air he should make certain that he keeps the flares if he wishes to keep them in view continuously, not fly over them, but rather to one side. Up to a height of 6000 ft. he should pay particular attention to this, but must remember to keep right away from the flares if he wishes to keep them in view continuously. At the same time, he must keep within gliding distance of the aerodrome, so that, if his engine fails or if unfavourable weather conditions begin to appear, he can be certain of his landing ground. If there is any suspicion of a ground mist he should come down at once. If more than one machine is practising at the same time, he should arrange beforehand some kind of signal or lighting whereby each pilot can recognize the other's machine. Alternatively, each pilot can arrange to fly in a certain direction so as not to interfere with the other. Very's light may be fired from time to time if there is nothing better at hand. All night pilot pupils

should avoid clouds so far as is possible, for they will obscure the aerodrome flares and the pilot may lose himself, or find himself in an uncomfortable position through losing his horizon. If the clouds are high up this does not matter so much, as he can easily come down and find out where he is.

Night Landing.

Landing at night is the most difficult part of night flying. The pupil should never attempt any kind of landing except the straight glide. "S" turns at night are dangerous, and spirals are quite unnecessary. He should start his straight glide into the aerodrome from a couple of miles away, with his engine on slightly, very much in the same way as he would attempt to land in a small field in daylight. He will thus half fly, half glide towards the aerodrome. When he thinks he is within 30 ft. or 40 ft. of the ground on the near side of the aerodrome, he must shut off his engine completely, but he must not put his nose down. Instead, he should keep the control lever in exactly the same position as with the engine doing about half its normal number of revolutions, as was the case on the descent. He should use the lights at the short arm of the L at the end of the aerodrome as the best means of judging the height, and, at the same time, he must keep well away from the lights and the long arm of the L down which he is landing, and which gives him his distance. If he does not keep away from them he will not be able to see them. He should start flattening out early, but should do so gently and gradually. If he does not touch the ground when he thinks he ought to, he should pull the control lever right back, but not so as to balloon, and await the bump.

If he does not hit the ground by the time that the third flare is passed, he must switch on and open up his engine again to make another circuit. It is advisable to land short rather than over, the ideal spot for landing being about the second flare. A landing should never be made with the engine on, as this increases the speed of the machine. People standing near the flares will

give him some idea of his height; but this is not so accurate as that given by the landing flares at the end of the ground.

Night-flying Equipment.

A few words on the equipment of the night-flying machine may be useful. The electric-lighting outfit for the instruments should be duplicated throughout, two lights being fitted to each instrument and the switch duplicated. The instruments themselves should have the figures painted with luminous paint.


An electric launching tube complete with battery and two parachute flares should be taken in case of a forced landing. The tube may be conveniently fitted between the pilot's legs, and a stick should also be carried to poke the parachute flare through the tube in the event of it sticking. If he has to make a forced landing, he must remember that the wind will blow the parachute flare in a certain direction; therefore, he must let off the flare at a height of 1000 ft. or so, outdistance it, and then turn and land into the wind against it.

Holt's wing-tip flares are often fitted, but must be placed so that there is no chance of them setting the wing on fire. Sometimes the wing tips are made of aluminium to prevent this. Flares burn for 60 seconds, and can be switched on at a height of 1000 ft. Some machines are arranged with a series of electric lights and powerful reflectors along and under the leading edge of the wings, the pilot being able to control their exact position by wires, so that he can turn them down when he is near the earth and see what the ground is like. On some pusher machines a system of illumination is fitted on the under-carriage.

It is important that the propeller should be painted black so that the light is not reflected on it, and does not dazzle the pilot's eyes when landing. Any bright parts of a machine should also be painted black for the same reason. Wings, fuselage and tail are often painted black for this reason, and also to prevent the machine being seen by enemy aircraft.

Setting Out an Aerodrome.

The setting out of an aerodrome for night landing is a very important matter. The petrol flares used to illuminate the ground are placed in the form of the letter "L," generally with the long arm lying into the wind. In certain circumstances it may be placed slightly across wind, as, for instance, if there is a better entrance to the aerodrome in that direction and

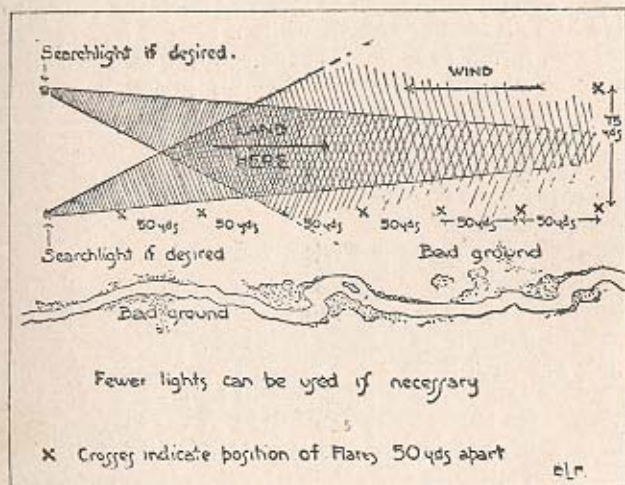

Setting out a night landing ground. The petrol flares are in buckets and arranged at intervals of 50 or 100 yards. The tail of the L-shape indicates the limit of good landing ground, and also the direction from which the wind is blowing.

the wind is only light. The short arm always gives the pilot the far end limit and the best area in which to land, the length of this between the flares being about 75 yds. The distance between the flares on the long arm is 50 yds., the number of flares used depending on the length of the aerodrome. It does not matter whether the long arm is placed to the right or the left of the short arm, but it is generally arranged to act as a guard against such obstacles as trees, houses or sheds

when they border the aerodrome. Different aerodromes can be recognized at night by the different distances adopted between the flares. At the two near corners of the aerodrome, i.e., where the pilot is to come in, two searchlights are sometimes arranged with their beams converging at a point about one-third up the line of flares, which is the proper place for a pilot to land. It is a good plan to place a high pole, with a row of electric lights down it, at the near side of the aerodrome (but not so as to interfere with the pilot), to give him an idea of height, while a bonfire 500 yds. or 600 yds. away, to illuminate the country and obstacles in front of him when finishing his glide, is also of assistance. All lights should be shaded so that their glare should not dazzle the pilot when landing. The illustration (page 203) shows how to set out an aerodrome for night flying.

Night Flying Tests.

A prospective night pilot is seldom given any dual control for night flying. His instructor can tell by his daylight flying if he is likely to make a successful night pilot, although it does not follow that because a pupil is only a fair daylight pilot he will be no use for night flying. He is generally considered fit for night flying, under moderate conditions, if he can make six or ten successful landings and attain a height of 6000 ft. in the dark. He must familiarize himself by daylight with the aerodromes equipped for night flying where he may have to land. He must possess a good knowledge of the country and be familiar with those parts of it which are open, and those which are wooded or otherwise dangerous. He can acquire this knowledge by moonlight nights as well as by day.

If an engine fails on a dark night, some people consider that the safest place to come down is on water, where the machine can be pancaked.

When flying at heights of, say, 2000 ft., navigation lights of red on the left wing and green on the right, with a white one on the tail, can be used so as to avoid other machines.

CHAPTER XII.

The Growth of Confidence.—A Word Both to Instructors and Pupils.

ALTHOUGH an instructor cannot make a good pilot out of an unsuitable pupil (as a pilot is born and not made), he can prevent a moderate pupil from becoming a moderate pilot by unwise actions. The art of instructing lies in getting the best out of the available material at one's disposal. For instance, out of 20 pupils, two may turn out first-rate pilots, four distinctly above the average, six may give up aviation before they have completed their training, and the remainder will be in the average run of pilots.

Instilling Confidence.

A good instructor will be able to decide in the early stage of tuition which of the 20 pupils are likely to be useless as aviators, and the sooner that they are got rid of the better for both instructor and pupil. If they hang on, disliking flying all the time, yet being afraid to acknowledge it, a tremendous amount of time and money is wasted upon their tuition. Not only that, but it is more than likely that they will inspire similar feelings in some of the other pupils, with the result that others, who, had they not been subjected to this baneful influence, would have made aviators of moderate skill, may also become nervous and lose their original keenness.

The growth of confidence in a pupil is one of the most important points which the instructor must study. He must try and inspire the pupil with confidence in himself as instructor and in his judgment of the pupil's own capabilities; while later on, when the pupil has flown solo, he must study the pupil's own confidence in himself. For this reason the pupil's first solo is of the

most vital importance, and he should not be sent up unless he feels confidence in himself. Let the instructor remember that an hour's extra dual-control work—which may make all the difference between a crashed machine, an accident to the pupil, with the possibility of the latter resigning afterwards, and a first-rate pilot—is always worth the time and trouble expended.

Steady Progress.

As the pupil advances in his course he can be sent up for longer and higher flights, the call upon his capabilities being gradually yet surely increased. Every time the pupil comes down after successfully doing something in the air that he has never done before, his confidence in his own abilities will have been increased. It may have been that he has done a spiral for the first time, or gone up in bumpy weather, or climbed a few thousand feet higher than he had ever done before; but in every case the growth of confidence will be there, and it should be the instructor's work to study it and to make the pupil make the best advantage of it in pushing his training ahead.

On the other hand, a pupil should remember that a good instructor will probably know much more about his capabilities as an aviator, at any rate in his early stages, than he does himself. The instructor can tell after a few days which pupils are keen and which are not; and here it may be repeated that a pupil who, after a few hours dual flying, decides that he does not like the work, had better say so and resign at once, rather than continue to waste his own and instructor's time pretending that he does. There is no disgrace in owning up to a feeling of nervousness in the air, and if more pupils did this as soon as they felt certain they would never make aviators, it would save a great deal of time and trouble. A first-rate instructor will generally turn out first-rate pupils, and vice versa; so that a nervous pupil may possibly be made much worse by a nervous instructor, whereas if he were sent to an experienced pilot, who would allow him to do anything he liked in the air, he might overcome his nervousness.

After a Crash.

Sometimes a pupil, in the early stages of solo work, has an accident and loses confidence in himself. It may pay to send him away for a few days' rest and change of scene, so that he cannot brood over the crash; but if he is of a certain temperament, even this will not cure him, and he may have to resign altogether.

Another type of pupil would not be affected at all in the same circumstances, but would want to go up again at once and make good the fault he had just committed. Probably the age of the pupil is largely responsible for this difference in temperament; a young and not yet fully-developed pupil might be permanently frightened by a crash which an older and more experienced man would think nothing of.

The More Practice the Better.

It is a very curious fact about aviation that the more one flies the less one minds it, and the less one flies the less one feels inclined to, so that it rests largely upon the pupil himself to go ahead. If he can overcome his apprehensions and master them, he will feel extra confidence, and the next time he will not find quite so much difficulty in forcing himself into the air. Eventually, if he repeats the process a sufficient number of times, he will think as little of making a flight as getting into a train or taking a taxi.

Recreation and, if possible, a change of scene are useful in getting the best out of pupils. It is a bad thing when an accident has taken place for pupils to be able to congregate and discuss all the details among themselves. It would be far better if they were able to go away and play a game of football or cricket, and so forget the accident, otherwise the less keen and stout-hearted among them will begin to brood, and, possibly, in the end, decide that they had better not continue with their course.

Some pupils become nervous after they have done several hours solo work in the air. This may be due to something happening to them in the air which they

do not understand, or else it may be brought on by their being pushed forward too rapidly. A rest, in the latter case, may be advisable, when they may return to their work with all their original keenness. It all comes back to the original question, that it rests with the instructor as to what course he should advise with reference to any given pupil. A course of action with one may prove fatal to another, hence the need for a careful study of the individual pupil's character and capabilities.

Dual Control in Rough Weather.

Flying in bumps is a difficulty with some beginners. Often it is a good plan for the instructor to take up a pupil in a dual-control machine in bumpy weather and to allow him to fly it so as to discover for himself that there is no particular danger in bumps, although the feeling of security and control may not be so great as it is in calm weather.

A point of great importance is to get the pupil over his first two or three hours solo work as quickly and as safely as possible. If his first few landings or get-offs are not sufficiently good, the instructor should explain to him his faults, and, if necessary, give him more dual control. If bad weather intervenes between the pupil's first few solos, more dual-control work should be given to allow the pupil to get his eye in again. For this reason, especially in winter time, the pupil should be pushed forward over his earliest stages of flying, so that he can gain the necessary confidence in himself as soon as possible, otherwise his course of instruction under bad weather conditions may be prolonged for months instead of weeks.

Advance Dual Control.

Even when a pupil can fly a machine solo, he may teach himself a number of bad faults, and for this reason an instructor would be well advised to take up the pupil from time to time and test his flying. Much more can be done nowadays by means of dual-control work than was thought possible in the early days. Pupils can be


taught to do vertical turns and spirals, loops, spinning nose dives, cartwheels, stalls, etc., but the principal point to remember is that the object of giving advanced dual-control instruction after the pupil can fly solo is to secure accuracy in flying, and to prevent the pupil from getting into careless ways of handling his machine in the air. Careless or bad flying may not matter much on a heavy and soggy elementary machine; but if the pupil allows himself to adopt the same sloppy methods on a machine of a more sensitive type, he will soon find himself in difficulties. Hence the importance of accurate flying even in the earliest stages. Another point in favour of giving a pupil advanced dual control is that this system has been found to increase his confidence in the machine in the air. If an instructor shows a pupil how to get out of practically any position, the pupil will be able to save himself if he ever finds himself in a similar position. Not only that, but the pupil will possess the necessary knowledge and confidence to be able to put the machine in those positions, besides being able to get it out of them. All this means that he will be a far better pilot.

When a Pupil Can Fly.

A pupil should be able to fly an elementary school machine solo after, say, five hours dual-control instruction. He will then do 20 or 30 hours solo on various types of machines, with a little dual control in landings on the more elementary types. If he shows some aptitude for flying he will, at the end of his 15 or 20 hours solo, be put on to faster and faster machines of the scout type, in which case, of course, no dual control is given. The length of his course of instruction depends on the weather. In the summer time it may take him two or three months to qualify as a scout pilot; whilst in the winter time it may take him much longer. Naturally, the keen pupil will get ahead of those who are less enterprising, with the result that he will benefit accordingly. It rests with the pupil to improve his own flying after a certain point. The great thing is constant practice.

The Time Taken in Learning.

A word to instructors on the quickest method of teaching pupils to fly may be of value at this point. If the pupil can be taught to fly in the air in, say, from 40 minutes to 50 minutes, the get-offs and landings may take him a further 3 hours or 4 hours. It is therefore advisable to get the pupil on to get-offs and landings as soon as possible. He will require more instruction in landing than in taking off. Therefore, to speed up instruction, the more landings the instructor can put in in a given time the sooner will the pupil become a pilot. With this in view, some instructors prefer to make large circuits of an aerodrome, landing, perhaps, four or five times per circuit and switching on again without stopping the machine. Others may do straights and land two or three times in each straight. A third plan is to make small circuits, rising

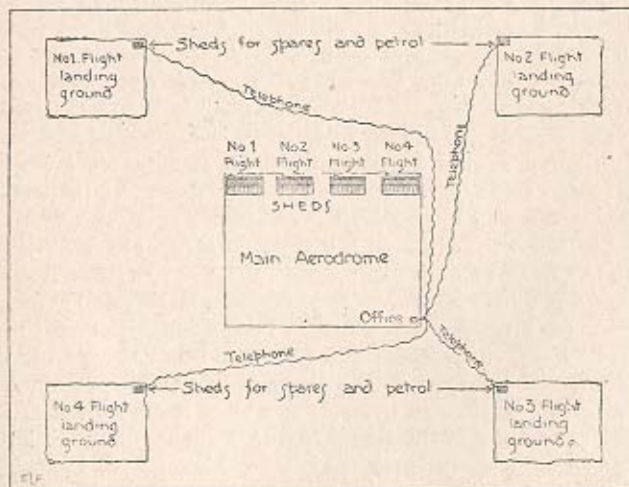

Plan of aerodrome and landing ground. Suggested arrangement of main aerodrome and subsidiary landing grounds at a distance of a few miles from headquarters. This arrangement should facilitate landing practice for a large number of pupils at one time.

to a height of several hundred feet, and then land in the same place again and again. The greatest number of landings can be got in in a given time by the first method, but this necessitates comparatively calm air, as otherwise the landings in the course of the circuit would have to be made across and down wind. A point that should be noted is that a landing from a low height, say, 100 ft., does not teach the pupil much, as the landing he should practise should be prefaced by the ordinary glide of several hundred feet. There is a good deal of difference between landing from a height of 100 ft. and from a height of 1000 ft., and if the pupil has only been taught the first, he will probably go hopelessly wrong when he attempts the second.

Thoroughness in Instruction.

An instructor should always remember that a pupil must be taught every bit of flying that is necessary in handling a machine, i.e., starting up, taxiing, taking off, climbing, flying level, turning to right and left, shutting off the engine, gliding and landing. Furthermore, it may be necessary for an instructor to show a pupil what to do in emergencies, i.e., if he bounces through failing to flatten out, or if he should flatten out too soon or too much; then, when the pupil is faced with these situations, he will do the right and not the wrong thing.

When a very large number of pupils are being trained at the same school, it will prevent congestion of the air and aerodrome if a number of small landing grounds are selected at a radius of several miles from the air station. It is far easier for 36 pupils to be given landing practice at six different fields than for the whole 36 to be taught on the same small patch of aerodrome. The accompanying sketch gives an idea of how this suggestion might be carried out. (See opposite page.)

CHAPTER XIII.

The Medical Aspect of Aviation.

By H. GRAEM ANDERSON, M.B., Ch.B., F.R.C.S., Temp. Surgeon R.N., Attached R.N.A.S., Surgeon to St. Mark's and the Belgrave Hospitals.

TO fly, an individual must be physically and temperamentally fit; especially is this so during instruction in the first 20 hours of solo flying. A pupil should not conceal any disease, and should he feel physically and temperamentally unfit, he should inform his instructor.

Many pupils remain silent and do not confess their disinclination to fly, fearing that their instructor or other pupils will taunt them with having cold feet. "It is certain that an aviator's disinclination to fly must have its basis upon some temporary defect of body or mind, and, without being unduly sensitive or timid, he should realize this and overcome the cause rather than tempt Providence by running the danger of overtaxing his power." This quotation from another writer on the subject applies most particularly to pupils.

Flying is a question of an active, well-balanced, decisive mind and a series of sound and quick reflex actions.

These reflexes are:—

1. Visual.
2. Auditory.
3. Tactile.
4. Muscular.
5. Balancing.

The Visual Reflex.

(1) The visual reflex consists of the impressions carried through the eyes to the brain, and from there down to the muscles of the hands and feet; e.g., the pupil sees a wing tilted up to the right; this impression is transmitted through the eyes to the brain, there

REFLEX ACTIONS

recorded, and a decision made which is sent down to the muscles of the hands, and the control lever is pushed over to the right. The normal time for the visual reflex action to occur is 20-100ths of a second. This is the reflex action, the most important and most used by the aviator. It is essential that all parts of this reflex are in good working order. Thus it can be seen how important is good vision in flying. I consider that no person should take up aviation unless he has full normal vision in both eyes.

The Auditory Reflex.

(2) The auditory reflex consists of the impressions carried through the organ of hearing—the ear—to the brain, and from there to the muscles of hands and feet; e.g., the sound of the engine missing is conveyed to the brain through the ear, recorded there, and a decision immediately made to look for a good landing place, land and repair the defect, is transmitted to the muscles of action of eyes, head, feet and hands. The normal time for the auditory reflex is 14-100ths of a second. This reflex is next in importance to the aviator, and it is essential that he should have good hearing. Wax is apt to accumulate in the ears and cause deafness. This deafness comes on gradually, but is usually made much worse after washing or swimming, when water gets in the ears and expands the wax. Lack of good hearing may lead to disastrous results. For example, when starting up the engine, should the pilot fail to hear—or misinterpret—the words "Contact!" or "Switch off!" when given by the mechanic who is swinging the propeller.

Tactile and Muscular Reflexes.

(3) The tactile and (4) the muscular sense reflexes are the impressions conveyed through the nerve endings in the skin and muscles to the brain, and from there down to the muscles of the hands and feet. For example, the pilot feels a bump, which sensation is conveyed from the skin and muscles to the brain, recorded there, and the decision sent down to the

muscles of the hands to correct the effects of the bump. The normal time for the tactile reflex is 14-100ths of a second.

The Balancing Reflex.

(5) The sense of balance or equilibration is received from the semi-circular canals, three in number, on each side, encased in bone, and situated behind the ears. These canals contain fluid and fine nerve endings. When the pilot and machine are off the level, either fore and aft or laterally, these little canals send impressions to the brain, and from there correcting impulses are sent down to the muscles of the hands and feet.

All these reflexes are slowed down or disturbed if the pilot is physically or temperamentally unfit from any disease, worry, fatigue, or after excesses in alcohol, etc. A slow reflex action, the delay of a second or part of a second in correcting an error in the air or in landing, may mean all the difference between a crash and safety. Thus, to preserve these reflexes, one sees how important it is to keep the body and mind in good condition during the tuition period of flying.

Drinking and Smoking.

Alcohol is better avoided altogether, and, similarly, excess in smoking, which may cause palpitation, faintness and double vision. Most aviators smoke too much. Diet should be generous and nourishing, as there is a good deal of nerve strain and wear and tear of the nervous system during this period. Flying when hungry is to be avoided, as faintness may occur in the air. Proper sleep is most important, and 8 hours sound sleep in the 24 hours should be obtained. Well-regulated physical training is of great value, and pupils should be afforded every recreation of mind and body at an air station.

With regard to the psychology of flying, or the study of the sensations in the air, it has been found from an analysis of 100 confessions of pupils after their first solo flights that the mind is so occupied in paying attention to flying, watching instruments, controls, etc., that fear has rarely time to assert itself, at least,

not enough to disturb their flying. Later on, a pupil is apt to become over-confident, and this must be guarded against. Coolness, level judgment and quick reflex actions are the secrets of success in flying. The fact that aeroplanes are now so improved and structurally strong that there is little or no danger of anything giving way in the air, should reassure pupils, who sometimes are distressed with this thought whilst in the air.

Pupils should always strap themselves in before getting off the ground, and they should become familiar with the fixing and unfixing of the belt. Belts should never be undone in the air. Unless belted, it is possible that in a bump, dive, or in faintness an aviator might fall forward on to the control lever with disastrous results. It is advisable for all pilots to carry a stout knife and a wire cutter in the outside pocket of the flying coat, so as to be able to cut themselves out of a crashed machine. (See page 181.)

What to Wear.

Safety helmets should be worn by pupils, as, in the event of a crash, they prevent injuries to the head and ears caused by wires and broken struts. The helmet should fit properly and not be easily dislodged from the head so as to slip forward. The ears must be well protected in front so that there is no rush of air straight across the orifice of the ear. A good helmet has a little roll of leather in front of each ear to deflect the air stream, thus enabling the pilot to hear well and also to prevent any damage to the ear drum.

Goggles should always be fitted with non-splintering glass, such as Triplex. Plain glass goggles should never be used, as in the event of their breaking serious injury might be caused to the eyes.

Gloves of leather lined with lambswool are the best for warmth and do not diminish the touch. The gauntlets should not be too stiff or too wide. It is better to wear the gauntlet inside the coat cuff, the latter being drawn tight by a strap. Close and tight-fitting gloves should be avoided.

Soft leather field boots lined with lambswool and

thick woollen socks keep the feet and legs warm. Rubber boots should not be used, as they do not give much warmth and are apt to slip on the rudder bar.

The body clothing for flying, of course, varies for winter and summer. No articles should fit too tightly. Woollen material is the best, as its interstices allow of a layer of warm air next to the skin. Leather outer garments are usually worn.

Most aviators fly with the mouth slightly open. Pupils should see that their teeth and gums are in a healthy state, otherwise any local disease therein is apt to be increased by the cold and rush of air.

Preventing Frostbite.

Should a pupil have to do a height test in winter, a good method of preventing frostbite—or should the skin be sensitive—is to smear the face and hands with a thin layer of vaseline. This prevents heat loss from the skin.

Air Sickness.

There are two forms of air sickness. One, which is akin to sea sickness, and due to the rolling and pitching of the aeroplane in bumpy weather, is very rare, but now and then one finds an individual liable to this ailment. Of course, a pilot, by doing steep spirals and switchbacks, may produce this form of sickness in a passenger. The other form of air sickness is due to height effects, and is better named "altitude sickness." It occurs at heights of 10,000 ft. and over, and is caused by the rarefied atmosphere and lack of oxygen. After passing 6000 ft. the breathing and pulse rate become quicker. Over 10,000 ft. the cold is extreme; slight buzzing in the ears, difficulty in hearing, headache, fatigue and torpor may occur. On descending rapidly, the deafness and buzzing in the ears become more acute, and severe earache may be felt. The headache continues for some time after landing and sleepiness is very marked. To guard against these effects when going to great heights, especially for any length of time, oxygen should be carried and inhaled slowly as a preventive.

FLYING INSTRUCTION NOTES IN BRIEF.

General and Condensed Hints in Definite Stages for the Guidance of Pupils.

STAGE 1.—BEFORE INSTRUCTION—GENERAL.

- 1.—Find out why a machine flies and learn to understand what happens when you get off, fly level, dive, turn steeply or gently, and land.
- 2.—Study the control levers and their effect when moved on the controlling surfaces (rudder, elevator and ailerons) of the machine you are going to fly.
- 3.—Find out how the switch, petrol and oil taps, throttle and fine adjustment work.
- 4.—Find out how the instruments work and what they are for; air speed indicator, height recorder, engine revolution counter, compass and side-slip indicator.
- 5.—Learn all about the details of construction of the machine and engine.
- 6.—Practise swinging the propeller.
- 7.—Practise sitting in the machine and working the control levers as if you were flying.
- 8.—Find out the correct number of revolutions at which to run the engine, and the climbing, flying level, and gliding speeds of the machine.
- 9.—If there are any points that puzzle you, ask your instructor to explain them.
- 10.—When an engine or machine gives trouble, find out the cause and remedy.
- 11.—Obtain a map of the country round the aerodrome and study it, so that you can pick up your bearings in the air.

STAGE 2.—EARLY INSTRUCTION.

- 1.—Never keep your instructor waiting. Be ready with flying gear, speaking tubes, gloves, cap, goggles, etc., to take your place in the machine.
- 2.—Always be punctual at the shed.
- 3.—Before going up, fasten your safety belt.
- 4.—Get a clear understanding with your instructor as to what signs or signals he will make when you are to take control, let go, fly straight, or turn.
- 5.—When given control, do not hold too tightly, but do not be frightened of working the controls when neces-

sary. You can fly the machine with one hand and two feet.

6.—Try and get the "feel" of the machine as soon as possible.

7.—Always look out in front of you on the horizon. It gives you the best guide as to when you are flying horizontally or longitudinally level.

8.—If you don't understand, always ask your instructor to explain anything he has told you, or any point that has occurred to you during your flight.

9.—To fly horizontally level, keep the nose of the machine on the horizon. To climb, keep the nose above the horizon, and to descend put the nose below the horizon.

10.—To fly laterally or horizontally level, keep the underside of the top plane parallel with the horizon.

STAGE 3.—FLYING LEVEL AND TURNS.

1.—To fly straight, fix your eye on some landmark on the ground ahead of you, such as a village or wood, or a cloud, and steer the machine towards it by means of the rudder.

2.—The position of the control levers is only relative. If you find that the machine is flying to the left in still air, with the rudder central, you must give a little more right rudder to fly straight.

3.—Learn to fly by sight and feel. Only use your instruments to verify occasionally the accuracy of your flying.

4.—Don't be alarmed at "bumps," but correct them quickly and firmly but not jerkily.

5.—In turning, keep the nose of the machine on the horizon. Then apply bank and rudder gently and gradually in the direction you wish to turn. If your bank is too steep, ease off the control lever. If your bank is too small, put on a little more by moving the control lever still further over in the desired direction.

6.—When straightening up after turning, move the control lever slightly in advance of the rudder, and rather past the central in the opposite direction to begin with. It can then be moved back to central when the rudder is central and the machine horizontally level.

7.—Learn to make gentle and gradual turns before attempting quick ones, which need more bank and greater accuracy.

8.—If you are turning to the right and notice wind striking your left cheek, you are side-slipping outwards, so give a little more bank or take off some rudder. If the wind strikes your right cheek on a right-hand turn,

you are side-slipping inwards. Remedy: more rudder or less bank.

9.—In making steep turns over 45 degrees, first bank and rudder in the desired direction. Trim the nose of the machine to the horizon by easing off bottom rudder, and make the machine turn by pulling the stick back towards the opposite elbow.

10.—As the machine will be on its side relative to the horizon, the rudder acts as elevator and the elevator as rudder.

11.—To come out of a steep turn, move the control lever still further over in the opposite direction and then forward and back to central position in a semi-circular movement. If you centre the control too soon, the machine will not be flying horizontally level. If you give opposite rudder too early, the nose will go up and you will side-slip inwards.

12.—In climbing and gliding turns, the nose of the machine must be kept above and below the horizon respectively, according to the correct climbing and gliding angle. The same rules re making and coming out of these turns apply as in flying level turns.

STAGE 4.—GETTING OFF.

1.—See that there are no loose articles in the passenger's seat that can foul the controls.

2.—See that the chocks are under the wheels.

3.—Fasten your belt and set the height indicator to "0." Hold the control lever back.

4.—Turn on petrol and see that the switch is off. Pump up pressure if necessary.

5.—Open throttle or fine adjustment and close air to suck in.

6.—Close throttle or fine adjustment, let go air lever, and give contact when the mechanic at the propeller is ready.

7.—Note the formula adopted for starting up the propeller, i.e., "contact," "switch off," as said by the mechanic and repeated loudly by the pilot.

8.—Don't run the engine more than is necessary. Warm up from cold gradually and throttle down again as soon as maximum revolutions are obtained.

9.—Wave your hand over your head to mechanics to withdraw chocks, and see that they have let go.

10.—Taxi out slowly with stick rather back of central position.

11.—Turn by using the rudder with a little extra engine.

12.—Get off into the wind.

13.—Get under way gradually, i.e., open up the en

gine steadily and not with a jerk. Some engines give their correct revolutions when the throttle is partially open.

14.—Push the stick forward as the machine gathers speed, and then ease it back when the tail is up and you think you have attained sufficient flying speed on the ground. It is safer to get off too late than too early.

15.—When it is difficult to hold the machine on the ground, the control lever can be eased back, and the machine will take the air. Don't pull the lever back with a jerk.

16.—As soon as the machine is in the air, ease the control lever forward, so as to allow the machine to gather more speed. Then climb steadily to the required height, say, 1000 ft.

17.—If the machine tends to swing sideways when getting up speed on the ground, rudder in the opposite direction and counteract the swing before it develops.

STAGE 5.—LANDING.

1.—Close the throttle fully and put the nose of the machine down to the correct gliding angle, i.e., with the nose the correct amount below the horizon. The speed should be slightly under flying level speed.

2.—Make a straight glide.

3.—When approaching the earth, watch the ground 30 yards in front of the machine. *This is very important.*

4.—Don't be disheartened if you fail to make a good landing to begin with. You need more practice.

5.—The ideal flatten out starts with the control lever in the gliding position about 30 feet from the ground, and ends with the control lever right back in your chest as the machine touches the ground.

6.—Try and keep the wheels of the machine off the ground as long as possible.

7.—The machine must not lose its flying speed until it is a few inches from the ground.

8.—If it loses its flying speed too early, it will pancake, that is, you have flattened out too soon, and you will flop instead of gliding to earth.

9.—If you try and lose your flying speed too late, you will fly into the ground and bounce.

10.—A good landing is all a matter of an accurate eye and a fine touch. No sudden or jerky movement is required.

11.—If you bounce badly, use your engine, make another circuit and try again.

12.—To begin with, the ground will seem to be coming up very fast towards you, but you will soon get used to it.

13.—In landing or getting off cross wind, keep the wing

SUMMARIZED INSTRUCTIONS

nearest the wind down, so as to eliminate a crabbing motion over the ground by side-slipping into the wind.

STAGE 6.—TAXYING.

1.—Taxy slowly, with the control lever well back, to keep the tail on the ground.

2.—Turn the machine by means of the rudder.

3.—Look where you are going, and go dead slow over bad ground or ruts.

4.—Use your motor well throttled down, and don't open up or throttle down in jerks. Don't "blip" the engine unless you have been taught.

5.—When machines are getting off or landing near you, keep stationary so as not to baulk them.

6.—Don't turn quickly on the ground, as this wears out the tail skids and twists the tail.

7.—In taxiing down wind, keep the control lever forward, so that the wind on the elevator keeps the tail down.

8.—In taxiing in a strong wind, tell off two mechanics to hold on to the wing tips, so as to prevent the machine lifting.

STAGE 7.—THE FIRST SOLO.

1.—Don't be in too much of a hurry. Fasten your safety belt and see that your crash helmet is secure.

2.—Clearly understand your instructor's final advice as to where you are to get off and land, how long you are to stay up, and at what height you are to fly.

3.—See that your motor is doing its correct number of revolutions on the ground, and when you have attained the desired height throttle down to fly level. Set the height indicator to "0."

4.—Give the proper signal to the mechanics to withdraw the chocks by waving the hand over the head, and wait a moment or two for them to get clear.

5.—See that there are no machines getting off or landing which may baulk you in starting.

6.—Remember the instructions on getting off. (Stage 4.)

7.—Don't go out of gliding distance of the aerodrome, but make full circuits, and don't cut across the aerodrome or go the wrong way round.

8.—Look out for other machines in the air.

9.—You will find that the machine will climb much more quickly solo than dual, so don't get too high before you realize it.

10.—If the weather is doubtful, look out for rain or thunderstorms or banks of mist, and come down at once if they approach the aerodrome.

11.—If you are lost, come down at once, but fly low,

say, 500 feet, round the field you have selected to land in before doing so, in order to see that it is suitable for the purpose. Then find out where you are and return home. If you have damaged the machine, telephone immediately full particulars to the aerodrome.

12.—When you decide to land, make a straight glide into the wind.

13.—Remember the instructions on landing. (Stage 5.)

14.—If there are machines on the ground when you want to land, make another circuit till the course is clear for you.

15.—You should know the whereabouts of bad ground on the aerodrome, and must avoid it.

16.—If you bounce badly, make another circuit and try again.

17.—Don't point the machine at sheds or woods when landing, as you may overshoot and run into them.

18.—If you see that you will overshoot the mark, make another circuit and try again.

19.—Don't turn under 500 ft., and remember the instructions on turning. (Stage 3.)

20.—Don't get off facing woods or sheds unless you have plenty of room to gain height before crossing them.

21.—Report to your instructor after the flight, and listen carefully to criticisms, so that you can learn how to avoid such mistakes another time.

22.—Don't get over confident. Take just as much care with your solo flights as you did with your first.

23.—Remember any special ground signs that are used to call all machines in from the air.

24.—Always report any defect in the machine to your instructor.

STAGE 2.—CROSS-COUNTRY.

1.—Work out your course accurately and carefully.

2.—Spend half an hour studying the map and the course you have been set.

3.—See that the engine, machine and instruments are in good working condition.

4.—Take the necessary tools, spare parts and money with you. An identification card is advisable.

5.—Find out the distance of the flight, and take your time of departure so that you have a check on your journey.

6.—See that the petrol and oil tanks are full.

7.—Take nothing for granted, but go over everything yourself.

8.—Find your way by using the compass and map in conjunction. Avoid clouds.

9.—As soon as you are lost, circle round some well-

defined landmark on the ground about where you should be judging by your time out and speed, and try and recognize it on the map. If you cannot, come down. (See instructions on Stage 7.)

10.—Always note the direction of the wind by smoke, or by what direction it was blowing when you last noticed it or at the start. You can also tell the direction of the wind by watching the drift of your machine.

11.—If your engine fails suddenly, switch off, turn the petrol off, and put the nose down.

12.—Select a field (grass for preference) free from obstacles, trees, houses, etc., and with length in the direction of the wind. A group of fields is preferable, as if you miss one you can land in the next.

13.—"S" turns provide the best method of making certain of hitting off the desired field.

14.—But don't turn near the ground.

15.—Aim at the near side of the field so as to give yourself the greatest run for landing.

16.—Don't come down too fast, as if you hit anything after landing or while gliding near the ground your speed will cause a worse crash.

17.—Don't land near railways or main roads for fear of telegraph wires, which are hard to see.

18.—Don't spiral down, as you may be facing the wrong way when you want to land.

19.—If you crash, telephone the aerodrome, stating the full extent of the damage.

20.—If you are able to continue the journey, take the fullest possible run in which to get off, and survey the ground ahead of you before starting.

21.—You must pancake in soft plough, standing crops or woods, with your stick right back and tail down.

22.—If after landing you see you are going to run into something, rudder away from it. You may remove the under-carriage, but this is better than smashing the whole machine.

23.—If you are up late, come down before it is dark.

24.—Peg the machine down for the night under the lee of trees, a hedge or house.

25.—Cover the engine, propeller and pilot's seat with a tarpaulin or sacking.

26.—If the motor goes wrong, try and locate the fault, and if possible repair it yourself.

27.—If your motor shows signs of gradually dying away, remember it is far easier to land with some engine than none, so come down and find the trouble. It may be a choked petrol supply or a faulty plug or two, or even loss of pressure in the petrol tank.

23.—Come down if there are signs of fog, heavy thunderstorms or snow.

29.—Practise map-reading before going on a cross-country flight. This can be done on solo flights round the aerodrome.

30.—In getting out of a small field it is best to "hoik" at the last moment and jump the hedge.

31.—Never stunt near the ground.

STAGE 9.—ADVANCED FLYING.

1.—Every time you go up solo try and do something you have never done before, i.e., go up higher, or for a longer flight, or in worse weather, or practise aerobatics.

2.—First perfect yourself in landing on a mark with engine cut off.

3.—For this, "S" turns, spirals and vertical banks with and without engine must be practised.

4.—Practise climbing turns and stalling turns. The latter are performed by pulling the machine up on its nose and then banking and ruddering in the desired direction. The engine can be cut off during the manoeuvre. Modifications of this manoeuvre with the engine on result in cartwheels and Immelman turns in which the machine does an about turn.

5.—In all aerobatics avoid too sudden changes of direction of the machine, i.e., pull the machine out of a dive gently and gradually.

6.—To zoom, fly level at full speed, and then pull the stick back. At the top of the zoom ease the stick forward.

7.—A hoiked turn is a curving zoom, but you should know your machine, and practise this at 1000 ft.

8.—To loop, put the nose down to 85 m.p.h., and pull the stick straight back into your chest. When over, cut out the engine, and pull the machine out of the dive gently. The latter part of the pull back is quicker than the first in starting the loop.

9.—To spin, cut out the engine, and stall the machine level with the nose on the horizon. Kick on rudder, and pull the stick right back into the chest. To come out, centre the rudder gently, and ease the stick forward.

10.—To roll, get up speed either with or without engine, kick on rudder, and pull the stick right back.

11.—To turn very quickly, switch off momentarily, kick on rudder without any bank, which will pull the machine up and twist its nose round in the desired direction. She will get into a spin if not righted immediately. Then switch on.

12.—To sideslip or partially glide sideways, switch off,

put on bank in one direction and rudder in the other. The machine will glide sideways in the direction in which the stick is held.

13.—The falling leaf descent is done with the engine off, and the stick held back in the pilot's chest. After she stalls, she can be allowed to gain speed, and then stalled again. If the engine stops, dive to restart it.

14.—Diving is best done with the engine off. Put the stick forward, and hold it there while the speed increases. Pull out of a vertical dive very gradually.

15.—Try all advanced flying at a height of 2000 ft. or 3000 ft.

16.—Practise sham fights and aerobatics with other pupils if your instructor thinks you are good enough. Practise approaching machines unseen, and always take note of the machines in the air about you.

GLOSSARY OF TERMS COMMONLY USED IN AVIATION.

Aerobatics	Aerial manoeuvre stunts.
Aeroplane	A heavier-than-air flying machine, supported by the action of air on fixed planes.
Ailerons	Hinged flaps let into the extremities of the main planes and operated by the control lever, to bank the machine and also to maintain its lateral level.
Ailerons, Balanced	By connecting the ailerons of each wing, so that when one is pulled down and the other is pulled up the surfaces are made to balance.
Airbrake	A flap that can be let down so as to increase the resistance of the machine to the air.
Air Pocket	See "Pocket."
Air Speed	The speed of the machine through the air.
Air Speed Indicator	An instrument for registering the speed of the machine through the air.
Altimeter	An instrument for indicating the height of the machine from the ground where it started from.
Angle of Incidence	See "Incidence."
Aspect Ratio	The proportion of span to chord of a plane.
Back	A change of wind in an anti-clockwise direction, i.e., from E. to N.
Backwash	The disturbed air in the wake of a machine in flight.
Balloon, To	The upward glide of a machine near the ground caused by the pilot descending too fast and pulling the control lever back too much or too quickly.
Bank, To	To raise one wing for the purpose of turning.

GLOSSARY

Bay	The space enclosed by two struts and their upper and lower adjoining surfaces.
Belt	The safety strap which secures the pilot to his seat.
Bessoneau	A tent for storing aeroplanes which can be erected and dismantled in a few days.
Biplane	An aeroplane with two pairs of wings set one above the other.
Blimp	Slang term referring to small airships.
Blip, To	To switch on and off rapidly.
Body	That part of a machine which accommodates the engine, pilot, passenger and probably the petrol and oil tanks.
Boom	See "Tail Boom."
Boss of a Propeller	The centre portion by which it is attached to the engine.
Bounce	The upward and forward movement of a machine which has struck the ground without flattening out sufficiently.
Brevet	A certificate showing that a pilot has passed certain elementary flying tests and may be considered a qualified pilot.
Bumps	Disturbances or roughness in the air due either to changes of temperature, clouds or wind.
Cabane	The projecting arrangement of struts above the pilot's head on a monoplane to which the anti-lift wires are attached.
Cabré	Tail down.
Camber	The maximum depth of curvature of the upper and lower surfaces of a wing.
Cartwheel	A particular type of aerial manoeuvre.
Cell	The whole of the lower surface of a plane and the whole of the top surface of the plane above it, with the struts and wires holding them together.
Cellule	The box-like rectangular compartments in a biplane formed by the upper and lower planes and the interplane struts.
Centre of Gravity	Centre of weight
Centre of Pressure	A line running from wing tip to wing tip, through which all the air forces on the wing may be said to act.

Centre Section	The centre cellule of a biplane where this cellule is made detachable from the wings.
Chocks	Wooden blocks placed in front of the wheels of a machine to prevent it moving when the engine is started.
Chord of a Wing	The distance between the leading and trailing edge of a wing.
Cockpit	The pilot's seat.
Cold Feet	A complaint, otherwise known as aerosthenia or nervousness of going into the air.
Combustion Chamber	The space between the top of the piston and the cylinder where the explosion of the mixture takes place.
Compression	The upward stroke of the piston which compresses the mixture in the combustion chamber.
Conk	The engine is said to "conk" when it fails.
Contact	Word used to denote that the switch is on.
Control Lever	Generally known as the "joy stick" or stick. A vertical lever controlling the fore-and-aft and lateral movements of the machine.
Control Wires	Wires connecting the rudder bar and control lever with their respective controlling surfaces.
Cowl	A sheet-metal cover generally fitted over or round the engine.
Crash Helmet	A specially-made flying helmet designed to save the pilot's head in case of a crash.
Crash, To	To smash the machine.
Dihedral Angle	A machine is said to possess a dihedral angle when the wings rise upward from the centre of the machine.
Dive	To descend steeply.
Dope	A preparation used to paint the wings in order to render them taut and weatherproof.
Dope Can	A metal syringe containing petrol for priming the engine.

Drift	The crabwise motion of a machine over the ground due to a side wind; also used to denote head resistance.
Dual Control	A system of levers and controls for the engine and machine, so that either the pilot or passenger can operate them.
Elevator	A hinged controlling surface, or flap, operated by the fore-and-aft movement of the control lever. Always set parallel with the wings of the machine and generally behind them. Used to control the up-and-down motion of the machine and in steep banks to make the machine turn.
Empenage	The tail unit of a machine, consisting of rudder, elevator and fixed tail plane.
Engine Bearer	The metal framework or tubing to which the engine is fixed.
Exhaust	The upward stroke of the piston which drives the burnt and exhaust gas out of the combustion chamber.
Explosion	The power stroke of the engine.
Extensions	Additional lifting surfaces added to the top planes.
Factor of Safety	Obtained by dividing the stress at which a body will collapse by the maximum stress it will be called upon to bear.
Fin	A fixed vertical plane generally fitted in front of the rudder to increase the stability of the machine.
Flares, Ground	Waste soaked in petrol, or petrol in buckets, set on fire and used as a landing light for night flying.
Flares, Parachute	Magnesium light electrically fired and attached to a parachute, which is released near the ground to facilitate landing at night.
Flares, Wing Tip	Magnesium lights electrically fired and used to facilitate landing at night.
Flattening Out	A phrase used to describe the gradual decreasing of the gliding angle of a machine until it merges into the horizontal a few inches off the ground.
Flight, A	An organization consisting of a small group of machines.

Flying Speed	The speed of a machine through the air necessary to maintain its support.
Forced Landing	See "Landing."
Formation Flying	The practice of a group of machines keeping station in the air.
Fuselage	The body of a tractor machine.
Gap	The distance between the upper and lower wings of a biplane.
Gas Bag	Slang term for airships.
Glide	To descend with the engine cut off with the machine under control and at approximately the flying level speed.
Gliding Angle	The angle that the fore-and-aft line of the machine makes with the horizon in order to make a correct gliding descent.
Ground Speed	The speed of the machine relative to the ground, which may be equal to, greater, or less than the air speed; therefore, ground speed is equal to air speed + or - wind speed.
Hangar	An aeroplane shed.
Hate, To Commit	To be extreme in doing a thing, i.e., excessive stunting near the ground.
Heavy Handed	Refers to a pilot who is clumsy with his controls and inclined to over-correct.
Height Indicator	See "Altimeter."
Hoik, To	To make the machine climb steeply and suddenly.
Horizon	The limit of ground in view.
Hun	Slang term for a person learning to fly.
Incidence, Angle of	The angle that the chord of a wing makes with the direction of motion relative to the air. A particularly muddling term, as it is often measured as the distance in inches that the front spar is above the rear spar when the machine is in the flying-level position.
Inclinometer	An instrument for showing the angle of the machine relative to the ground.
Induction	The inlet stroke of the engine.
Joy Stick	See "Control Lever."

Kathedral Angle	A machine is said to possess a cathedral angle when the wings slope downwards from the centre of the machine.
Keel Surface	The side surface of a machine as opposed to the head-on surface.
King Post	A bracing strut generally found on the top of controlling surfaces, such as rudder, ailerons and elevator, in which case it also acts as a lever.
Knock	A peculiar noise emanating from the engine and indicating some kind of mechanical trouble.
Knot	A nautical mile per hour, i.e., it is wrong to speak of knots per hour.
Landing	The action of a machine in coming to earth.
Landing, Forced	The action of a machine in coming to earth other than at the will of the pilot, i.e., in the case of the engine failing.
Leading Edge	The point or entering position of a wing.
Leeward	Away from the wind.
Leeway	Lateral drift to leeward.
Left and Right	Always refer to the left and right of the machine and engine as seen by the pilot sitting in his seat.
Lift	The force exerted by the air on a plane in a direction perpendicular, or nearly so, to the motion.
Log Book	A book kept by pilots giving details of each flight.
Longerons	The longitudinal members of the fuselage.
Loop	A manoeuvre in which the machine, after flying straight, does an upward and backward turn or circle, and then continues in the same direction as before.
Lubber Line or Lubbers' Point	A mark on the body of a compass corresponding with the fore and aft line of the machine.
Machine	The aeroplane as apart from the engine.
Motor	An incorrect term for the power unit or engine.
M.P.H.	Miles per hour.
Nacelle	The body of a pusher machine.

Nose	The front part of a machine.
Nose Dive	A very steep descent with or without engine.
Nose Heavy	Backward pressure required on the control lever to make the machine fly level.
Nose Piece	The front central portion of a rotary engine.
Outtrigger	The framework connecting an elevator placed in front of the machine with the main planes.
Pancake	To drop to earth from a height of a few feet owing to losing flying speed and flattening out too soon.
Pegging Down	Securing a machine by rope to pegs in the ground so as to prevent it capsizing in a wind.
Pilot	A person controlling an aeroplane in the air.
Pitch of a Propeller	The forward distance that the propeller would travel if it were allowed to cut its way, without slip, through some medium such as butter.
Pitot Tube	Consists of two tubes, one open to the air flow and the other protected. The other ends of the two tubes are connected to the air-speed indicator. One tube is called the pressure tube and the other the suction, or static, tube.
Plane	Term used to apply to the supporting surfaces of a flying machine. The planes may be cambered, as in the case of the wings, or flat, as in the case of the tail plane.
Plane, Main	The wings of the machine.
Pocket Air	A disturbance in the air causing the machine to drop.
Propeller	The airscrew driven by the engine which forces the machine through the air, generally known as the "Prop."
Protractor	An instrument for measuring angles.
Pusher	A machine in which the propeller is fitted behind the main planes.
Quirk	A person learning to fly; slang term for pupil.

Race, To	Refers to the practice of speeding up the revolutions of an engine to their maximum.
Radial	Refers to a type of engine in which the cylinders are set radially round the crankshaft, and are stationary.
Radius of Action	The distance that a machine can fly from its starting point and return without replenishing the tanks. Greatly influenced by the wind factor.
Remou	A disturbance in the air.
Remorque	A motor trailer for carrying aeroplanes.
Revs.	Short for revolution.
Revving	Short for revolving.
R.F.	Representative fraction. A term indicating the scale of a map.
Rib, Compression	A rib designed to act as a strut between the front and rear spars of a wing.
Ribs	The members used in a wing to give strength and shape in a fore and aft direction. Often called "former ribs."
Right and Left	Always refer to the right and left of the machine and engine as seen by the pilot sitting in his seat.
Right and Left of a Machine	Always refers to the machine as seen from the pilot's seat.
Roll	A manoeuvre in which the machine does a sideways turn or circle, and then continues in the same direction as before.
Rotary	Refers to a type of engine in which the cylinders are set radially round the crankshaft and revolve.
R.P.M.	Revolutions per minute; generally applied to the engine.
Rudder	A vertical controlling surface, or surfaces, set parallel with the fore and aft line of the machine, and used to control the direction of flight.
Rudder, Balanced	A vertical controlling surface set parallel with the fore and aft line of the machine, but pivoted some way back from its leading edge.
Rudder Bar	A pivoted lever, foot-operated, controlling the rudder.

Rudder Post	The upright member to which the rudder is hinged.
Scout	A small single-seater machine.
Sensitive	The reverse to soggy.
Sideslip	A sideways movement of a machine through the air either outwards or inwards.
Shock Absorbers	Devices for taking the shock of the machine in landing. Sandow elastic, springs or oil are all used for this purpose.
Skid	An inclined portion of the undercarriage or attachment to the tail which helps to take the shock of landing and drags along the ground in doing so, thus slowing up the machine.
Slipstream of Propeller	The "wash" set up in the wake of a revolving propeller.
Soggy	Slow on the control and heavy to handle.
Span	The measurement of a machine transversely from wing tip to wing tip.
Spar, Main, Front and Rear	The main members on which the wing is built. The front spar is generally considered the main spar, and sometimes also forms the leading edge of the wing.
Spider	The front bearing supports and plate of a rotary engine.
Spin, or Spinning Nose Dive	To go round and round in a small circle with the nose of the machine pointing directly downwards. A corkscrew descent.
Spiral	A steeply-banked, continuous-gliding turn (with engine off).
Splice	To unite the ends of two pieces of wire, rope or wood. In splicing cable wire or rope the strands are interlaced.
Squadron	An organization consisting of several flights of machines.
Stability	The property of a machine whereby it tends to return to its normal flying position if left uncontrolled.
Stagger	The amount that the leading edge of one wing is set in advance or behind the

	leading edge of the other plane, measured with the machine in the flying-level position.
Stall	To lose flying speed.
Strainer	See "Turnbuckle." The word can also refer to gauge or chamois leather used to strain petrol through before refilling the tanks.
Streamline	A shape of a body that offers the least resistance to its path through the air.
Struts	Vertical members uniting spars in upper and lower planes.
Stunts	Unusual or exaggerated evolutions in the air.
"S" Turns	A series of steeply-banked right and left-hand gliding turns (with engine off).
Switch	A device for allowing or interrupting the passage of electric current generally to the sparking plugs.
Tachometer	Engine revolution counter.
Tail	A group of planes set behind the main planes and consisting of both vertical and horizontal surfaces, used to control the balance of the machine.
Tail Boom	The long spar connecting the main plane with the tail on a pusher machine.
Tail Heavy	Forward pressure required on the control lever to make the machine fly level.
Tail Plane	A fixed plane fitted parallel with the main plane, to which the elevator is attached.
Tail Plane, Lifting	A fixed plane fitted parallel with the main plane to which the elevator is attached. It also carries some of the weight of the machine.
Tail Skid	See "Skid."
Taxying	The progress of a machine on the ground with the engine running, though not fast enough to give flying speed.
Tee	A ground sign indicating the direction of the wind. Originally an arrow, but it was found to be an improvement to widen the tip of the arrow until it became a T. The wind blows from the cross piece down the body of the T.

Tender	A light motor lorry.
Throttle Lever	Controls the amount of explosive mixture entering the engine.
Ticket, To Take	To pass an elementary flying test, and thus be registered as a certified aviator.
Torque, Engine	The reaction of a propeller which tends to cause the machine to turn about its longitudinal axis in a direction opposite to that in which the propeller is revolving.
Tractor	A machine in which the propeller is fitted in front of the main planes.
Trailing Edge	The rear edge of the wing.
Trestle	Wooden frames or scaffolds designed to support the tail or wings of a machine when repairs are being carried out.
Triplane	An aeroplane with three pairs of wings, set one above the other.
Trueing Up	Adjusting the rigging of a machine so as to correct its balance in the air.
Turnbuckle	A fitting used to adjust the tension of wires to which it is attached. Also called a strainer.
Undercarriage or Under-chassis	That part of a machine which carries the weight of the aeroplane on the ground, and also takes the shock of landing.
Veer, To	A change of wind in a clockwise direction, i.e., from N. to E.
Vertical Bank	A loosely-applied phrase referring to any bank over 45 degrees.
Very's Light	A coloured light fired as a signal from a special form of pistol.
Volplane	A glide.
Warp	The yarn running lengthwise in aeroplane fabric.
Warp, To	To move the control lever sideways so as to increase or decrease the incidence on a wing with a view to raising or lowering it.
Wash In	An increasing angle of incidence of a wing towards its wing tip.
Wash Out	A decreasing angle of incidence of a wing towards its wing tip.

Weft	The yarn running crosswise in aeroplane fabric.
Windscreen	A transparent screen mounted in front of the pilot and passenger to shield them from the rush of air by the machine in motion.
Wind Speed	The speed of the wind.
Wind Up	To be frightened of going into the air.
Wing	The main supporting surface of an aeroplane.
Wing Tip	The right or left-hand extremity of a wing.
Wing Tip Skids	Semi-circular pieces of bamboo placed under the wing tips to take the shock off the wings, should the machine heel over on the ground.
Wire, Compensating or Balancing	The wire connecting opposite ailerons of top or bottom planes.
Wires, Control	See "Control Wires."
Wires, Drift	Used to transmit the head resistance set up by the wings to the main body of the machine.
Wires, Flying Drift	Internal bracing wires of a wing connected from the front spar to the rear spar diagonally outwards in each cellule.
Wires, Flying or Lift	Used to transmit the weight of the machine to the wings. They lie upwards and outwards.
Wires, Landing	Used to take the weight of the wings when the machine is on the ground. They lie downwards and outwards.
Wires, Landing Drift	Internal bracing wires of a wing connected from the front spar to the rear spar diagonally towards each cellule.
Wire, Snake	Fine wire twisted round other wires to prevent the latter fouling the propeller, should they break.
Wires, Warp	Wires used to warp the ends of the wings to control the machine laterally.
Zoom	To ascend very steeply after flying level at full speed.

Printed and Published by
TEMPLE PRESS LIMITED,
7-15, Rosebery Ave., London, E.C. 1.

Worms Aircraft
Construction Co.
LIMITED,

Aeronautical Engineers.

Contractors to H.M. Admiralty and War Office.

Designers and
Manufacturers
of Aeroplanes,
Seaplanes,
Spares and
Accessories.

RUTLAND WORKS,
BOURNEMOUTH.

MAX. WORMS (Managing Director, French).

Telephone Bournemouth 1215.
Telegrams ... "WORMS, BOURNEMOUTH."

"A Monument of Efficiency"

WORLD'S AEROPLANE RECORDS

have been made on

Wakefield

Castrol

Motor Oil

"R" (Racing)

Altitude Endurance
Speed Climbing
Weight Carrying

AEROPLANE RECORDS
1909-1914

Practically all Pre-War
Records were made on

CASTROL "R"
(Racing),

including
Altitude Endurance
Speed Climbing
Weight Carrying

PRACTICAL
POINTS WORTH
CONSIDERING
about

Wakefield

Castrol

Motor Oil

"R" (Racing)

CASTROL "R" possesses the lowest cold test of any known Aero Engine Lubricant.

CASTROL "R" being manufactured to one established formula is consistently uniform in quality.


CASTROL "R" gives little carbon and is therefore a clean and efficient Lubricant.

CASTROL "R" has for many years been in constant use by the Admiralty & War Office all Aero Engine Builders, Flying Schools and by Testers.



LODGE

AERO PLUGS

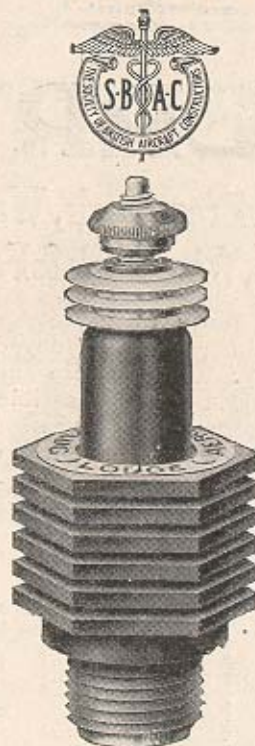

The world's best plugs for both rotary and
stationary-cylinder engines.

Complete Output reserved for British and Allied Governments.

MADE IN ENGLAND.

Illustrated Catalogue on Application.

THE LODGE SPARKING PLUG CO., LTD.,
RUGBY.



TERRY

**Springs, Presswork, Washers,
Controls, Wirework & Ferrules**

WE are ready to make up aircraft parts, in any metal, any design, or quantity. Workmanship and material is the highest grade possible; established by more than 60 years successful experience. Why not seek our aid?

HERBERT TERRY & SONS, LTD.,
The Spring and Presswork Specialists,

ESTAB.
1855.

REDDITCH,
ENG.



Important to Manufacturers.

IF you are engaged on repetition work to fine limits, consider the merits of this gauge.

Micrometer troubles are eliminated, and disputes between viewers and inspectors definitely settled. It quickly indicates if the work is within the limits. **ERROR** is magnified 1000 TIMES. Thus


$\frac{1}{1000}$ " produces a visible rise of

The Prestwich Gauge
Accuracy to the ten-thousandth part of an inch with ease

1 inch in the tube, and can be seen by the most unskilled operator. **SENSE OF TOUCH** is eliminated, and there are **NO WEARING PARTS**.

The instrument fills a gap which modern engineering practice has produced. Let us know your requirements, no matter how difficult—we have many adaptations

Write to-day for particulars.

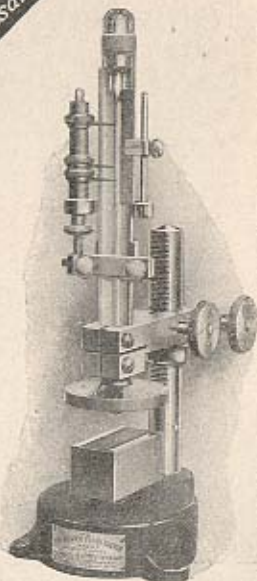

J. A. PRESTWICH & CO., Northumberland Park,
TOTTENHAM, LONDON.
Manufacturers of the world-famous J.A.P. Engines.

BRITAIN'S



**LEADING
LIGHT CAR**

AUTO-CARRIERS (1911) LTD
THAMES DITTON, ENGLAND.


Aeronautical Engineers to H.M. Government.


THE
REGENT

CARRIAGE CO. LTD.

Fulham

London
SW.6

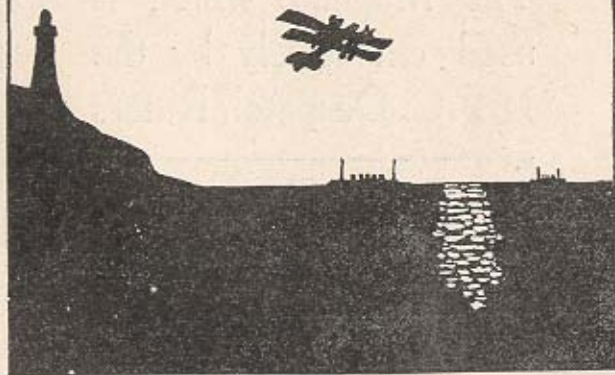

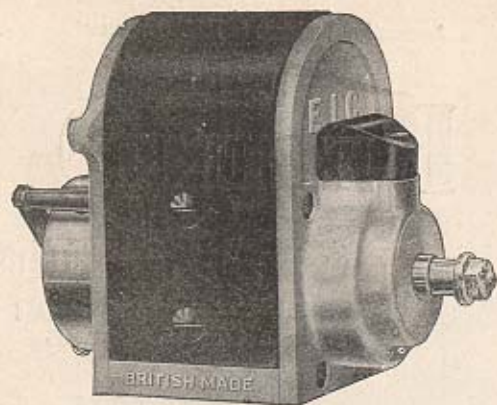


EVERY BIT BRITISH

The Magneto which is
used exclusively by the
R.F.C. Despatch Riders

**E.I.C. MAGNETOS, Limited,
BIRMINGHAM.**

Members of the British Ignition Apparatus Association.

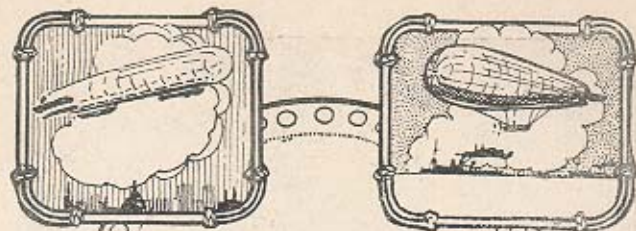

North British Rubber Company's BALLOON FABRICS and MATERIALS.


The North British Rubber Co. were the first British firm to make Aeroplane Tyres and Fabrics and Balloon Materials, which are used by many of the leading airmen. With 60 years' experience in the manufacture of rubber goods of every description, extensive scientific research and expert knowledge, we are in a position to supply exactly what is required.

NORTH BRITISH
CLINCHER

AEROPLANE TYRES

are specially constructed to withstand great shock and side strain on alighting. They are made at Castle Mills, Edinburgh—the Empire's largest Rubber Factory.

The NORTH BRITISH RUBBER Co. Ltd.
Factories—CASTLE MILLS, EDINBURGH.

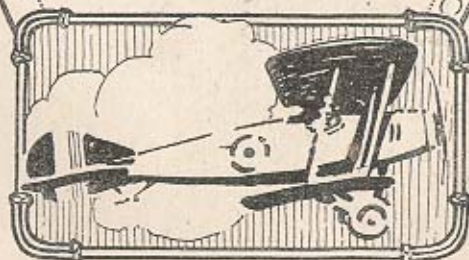

Descriptive list and special literature free on request.




**PAST, PRESENT
AND FUTURE**

FULL three thousand years ago the Sphinx was built. To-day, massive and immutable, it stands as the accepted symbol of enduring strength. So with SPHINX PLUGS, there are not to-day, nor will there ever be, plugs more enduring or better suited to their work. For aeroplanes, as for motorcycles and transport vehicles, the superlative qualities of Sphinx plugs are recognised everywhere.

**The Sphinx Mfg. Co.,
BIRMINGHAM.**

SPHINX

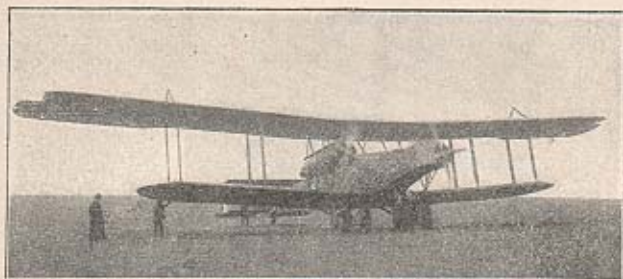

A Handley-Page Bombing Machine fitted
with Sunbeam-Coatalen Aircraft Motors.

SUNBEAM-COATALEN AIRCRAFT MOTORS

are original in conception
and have gained the
greatest of all records—
that of unfailing good service
in every hostile area.

THE
Sunbeam Motor Car Co., Ltd.,
WOLVERHAMPTON.





AS USED BY THE
AIR SERVICE

HOBSON MANUFACTURING Co., Ltd.
29, Vauxhall Bridge Rd., London, S.W.1

BURBERRY

CARAPACE AIR-SUIT

"Sheath Armour for Knights of the Air."

The perfect one-piece Overall Suit to ensure warmth and protection.

THE CARAPACE AIR-SUIT
is made up of three layers, each of different material.

THE OUTER COVERING
is of Burberry Gabardine, so densely woven and proofed that it will withstand intense pressure from wind or rain.

NEXT COMES
an interlining of woollen fleece, giving maximum warmth with minimum weight.

THE INNERMOST LINING
is of glissade, which enables the airman to slip into the suit quickly.

THE SUIT IS RE-INFORCED
by a double plastron of Burberry Gabardine across the chest and shoulders. The Burberry Puttee Collar, adjustable tabs, for tightening sleeves or trouser-legs, waist-belt adding comfort and stability, and large pockets, are further distinctive details. The helmet is of the latest approved Burberry pattern.

THE WHOLE OUTFIT
whilst affording efficient security, ventilates naturally, without the objectionable features of rubberproofs, oilskins or leather, and is much less weighty and cumbersome.

Intense cold precipitates moisture on the inner surface of air-tight garments.

Burberry materials, by their perfect self-ventilation, avoid all forms of heat condensation.

During the War BURBERRYS
CLEAN and RE-PROOF
Officers' BURBERRY
WEATHERPROOFS
FREE OF CHARGE.



R. A. F. KIT.
Burberrys supply Uniforms, Weatherproofs, and every detail of Royal Air Force equipment in cloths suitable for Europe or the East
READY TO PUT ON.
or to Measure in 2 to 4 days.

BURBERRYS Haymarket S.W.1. LONDON
Boulevard Malesherbes, PARIS, also Provincial Agents.



DERMATINE

Stands all climates and atmospheric variations, rough wear, hard usage, heat, cold, steam, damp, oils, alkalis and acids, better than leather, rubber, or gutta percha.


Tel. Address :
"DERMATINE
LONDON."



Telephone :
No. 31 HOP.

JOINTS for MOTOR CAR and AERO ENGINES.

SPECIALLY MOULDED.

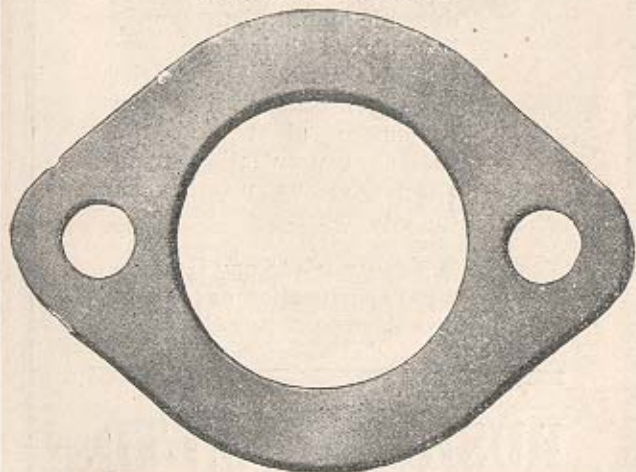

Suitable for Cylinder Covers, Carburetter Flanges,
Induction and Exhaust Pipes, &c.

Any Design to Sketch or Pattern.

Write for Samples to—

DERMATINE Co., Ltd., 93-5, Neate Street, LONDON, S.E. 5, Eng.

(C. R. C. HART, Managing Director).

You Can't Fly

—until you have the machine.
You can't have the machine for effective purposes until you can guarantee the quality of the materials and the efficiency of their "working-up."

CIn the metallic materials and workmanship departments of dynamic flight, Rushmore's have played their not inconsiderable part. Hence the large expansion of the Rushmore plant and the present concentration upon all non-ferrous metal work for aeroplanes.

CWe can work to any Government specification or to your own drawings.

RUSHMORE'S, LTD.

Peterborough Road, Parson's Green,
LONDON S.W. 6.

'Phone—Putney 2490-2491. Wires—"Aplanatic, Ful, London."

THE GRAHAME - WHITE COMPANY.

IN order that the British Empire may derive the full benefits from aerial transport, the following factors must be regarded as being vital to success:

1. Well-designed Aircraft for all types of service.
2. Pilots who are highly skilled.
3. The interest and practical support of the general public.

For rendering assistance in all three of these directions, the Grahame-White Company is in a unique position. In its factories, containing all that is newest and best in organization and machinery, and in connection with which a skilled designing staff is continuously employed, every facility now exists for the construction of commercial and pleasure-type machines; while for the training of pilots there is the world-renowned Grahame-White School of Flying—the first British School to be established, and a school which, possessing every advantage in skilled instructors and specially-designed machines, has now had nine years continuous experience in the teaching of men to fly.

Finally, as the centre for all the sporting and spectacular aspects of flight—as well as for demonstrations in the use of commercial and pleasure machines—there is the famous London Aerodrome, the most perfectly-equipped flying ground in the world, of which the Grahame-White Company are proprietors. Here, before the war, as many as 60,000 people assembled to witness an "Aerial Derby," and it is here, too, in the great era which is dawning of commercial aerial transport, that opportunities will present themselves—and will be made vigorous use of—not only for improving the design of aircraft in competitive events, but for encouraging the aerial tourist and private flyer, and also for widening and strengthening the interest of the public in all these developments of aeronautics which now impend, and which have an importance almost incalculable.

The Grahame-White Aviation Co., Ltd.
Aeronautical Designers, Constructors & Engineers.

Head Offices & Works:

The LONDON AERODROME, HENDON, N.W.9
Grams: "Volplane," Hyde, London. 'Phone: Kingsbury 120 (5 lines)
London Office: 12, Regent Street, S.W.1
Telephone: Regent 2084.

W. G. TARRANT

CONTRACTOR TO
THE AIR BOARD.



AIRCRAFT HEAD OFFICES
BYFLEET. SURREY
Telephone, Byfleet 1.2&3

LONDON OFFICES
• CLOCK HOUSE •
ARUNDEL STREET, W.G.2
Telephone, Gerrard 8362

A. V. ROE & CO., Ltd.

Aeroplane
Constructors,
NEWTON HEATH,
MANCHESTER.

Telephones—
City 8530 and
8531.

Telegrams—
"Triplane."



AEROPLANES
AND
PARTS

HAMBLE,
near
Southampton

Telephone—
Hamble 18.

Telegrams—
"Roe, Hamble."



166, PICCADILLY,
LONDON, W.1.

Telephone—
Gerrard 3186.

Telegrams—
"Senalpirt, Phone."

Code: A.B.C. 5th Edition.

Contractors to H.M. Government.



Makers of Aeroplane Fittings

Electric Equipment for
Heating and Lighting.

Streamline Wires and
Fittings.
Prompt Deliveries.

AERO WIND SHIELDS.


"Labyrinth" Relief Valves, Oil
and Petrol Fillers, Pressure
Pumps, Petrol Filters, Taps and
Brass and G.M. Fittings generally.

Water Joint Clips, Turnbuttons,
Shackles and Small Parts.

Prices and Particulars on receipt of Enquiries.

NOTE.—We have an Illustrated Catalogue of our Aeroplane
Fittings. Write us and we will send you a copy.

**THE ROTAX MOTOR
ACCESSORIES CO., LTD.,**
Rotax Works, Willesden Junction, N.W.10.

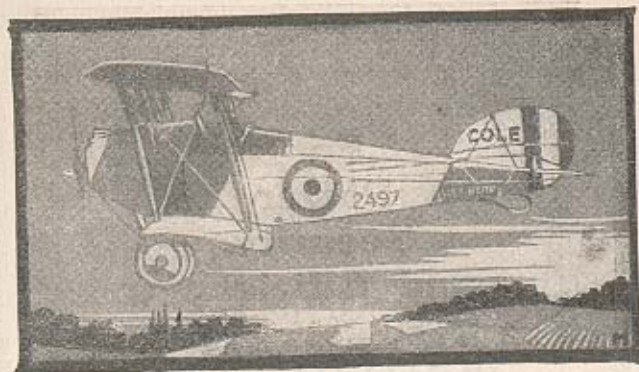

WM.
COLE & SONS
LIMITED,

Aircraft Manufacturers
Contractors to H.M. Government

235, HAMMERSMITH RD., LONDON, W. 6.
Telephone—Hammersmith 1413-4.

For
Power,
Security,
and Efficiency

see that your machine
is fitted with a genuine

BRITISH-MADE

ZENITH

CARBURETTER

The favourite
of every experi-
enced airman.


Send for illustrated booklet, free—
ZENITH CARBURETTER CO., LTD.,
40-42, Newman St., LONDON, W.1.



Every time you see an
Aero engine, remember
that the development of the
internal combustion engine was
largely due to the pioneer experi-
mental work of the firm of

Crossley
"of Gas Engine Fame"

extending over a period of 60 years. The
knowledge resulting from this experience was
built into the Crossley Car, which proved to be
one of the most reliable cars under every sort
of active service conditions, and the post-war
Crossley Car will have added value because of
the new experience gained under these conditions.

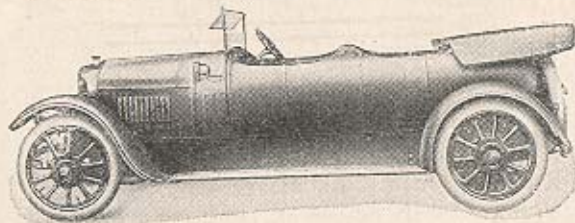

CROSSLEY MOTORS, LIMITED,

Builders of Quality Cars,

MANCHESTER.

Telephone: City 4211 (3 lines). Telegrams: "Motors, Gorton."
London Office & Service Depot: 50, Page Street, Westminster, S.W. 1.



99%

Ninety-nine per cent
of the magnetos fitted
to Rotary Engines for
fighting, scouting and
observation planes, are
of 'ML' manufacture.

The ML Magneto Synd Ltd. Coventry

Claudel-Hobson • CARBURETTERS •

AS USED BY THE AIR SERVICES

H. M. HOBSON, LIMITED

29, Vauxhall Bridge Road, London, S.W.1






**NAYLOR'S
AERO
VARNISHES, PAINTS
& ENAMELS**

Approved Qualities:

WOODFILLERS
SHELLAC SPIRIT VARNISHES
UNDERCOAT COPAL VARNISHES
AIRSCREW VARNISHES
COPAL VARNISH FOR STRUT
DOPE-RESISTING PAINT
DOPE-RESISTING VARNISH
BATTLESHIP GREY PAINT
SEAPLANE VARNISHES
SERVICE PAINTS
STOVING JAPANS
ENAMELS, GOLDSIZE, Etc.

NAYLOR BROTHERS
(LONDON) LTD.
Manufacturers of Superfine Varnishes,
Paints, Enamels and Distempers.
LONDON & SOUTHALE.
 Offices: 407 & 409, OXFORD ST., London, W.
 Depot: 14, JAMES STREET, Oxford St., W.

PALMER

"SIGNATURE OF THE THIRTY-HOUR TYRE"

CORD TYRES

were the first tyres
to stand up to 100
miles per hour on
a car.

That was years ago,
in days of peace.

To-day, Palmer Cord
Tyres and Wheels
on Aeroplanes are
playing their part in
helping to win the war

THE PALMER TYRE LTD.,

Contractors to the Admiralty, The War
Office, and The Ministry of Munitions
for Aeroplane Wheels and Tyres.

119, 121, 123, Shaftesbury Ave., LONDON, W.C.

Telephones: 1214 Gerrard (Four Lines).
Telegrams: "Tyricord, Westcott, London."

ARTHUR LYON & WRENCH LIMITED.

WILLESDEN & WESTMINSTER.




"AERO" type complete self-contained petrol-electric GENERATING SET, to give 1.25 k.w. Overall height less than 12", and the lightest combination of its output ever produced.

"AERO" type Searchlight, 10" dia., with automatic lamp and "joystick" universal control of movement.



Instructions for Amateurs TO ENAMEL a Motorcycle

DROP us a line for a free copy of the leaflet instructing amateurs to enamel a motorcycle with Robbialac. Write to Jenson and Nicholson, Ltd., Robbialac Works, Stratford, London, E.15. All accessory dealers stock Robbialac Brushes and Robbialac Enamel, which is obtainable in Black, Indian Red, Service Green, Khaki, and all popular colours. Colour card free.

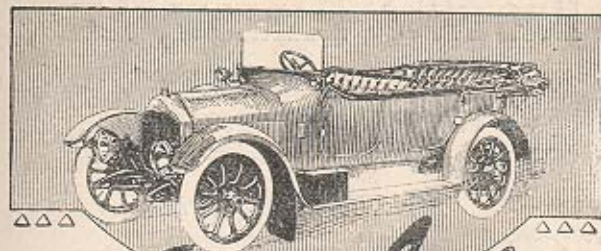

Humber

The Car for
which thousands
are waiting.

OUR output is only suspended "for the duration of the war." The Government work on which we are engaged is of more importance for the time being. But the experience gained in the manufacture of Aircraft engines will be invaluable to us in the future—and to you, if you put your name on our waiting list.

HUMBER LIMITED, COVENTRY.

LONDON—32, Holborn Viaduct, E.C. 1

BROWN & BARLOW, LTD.,

CARBURET WORKS,
WITTON, BIRMINGHAM.

MAKERS OF THE

"B & B" Carburetters

Contractors to His Majesty's Government.

Telegrams : "Carburet, Birmingham." Telephone : East 301.

USERS OF AIRCRAFT KNOW THAT

EXPERIENCE

IS AN ADVANTAGE IN
AIRCRAFT CONSTRUCTION.

CONTINUALLY

SINCE **1907**

James H. Randall & Son

(J. H. Randall & J. B. Randall)

HAVE MANUFACTURED

TANKS, RADIATORS, PIPES, &c.,
FOR AIRCRAFT.

TELEPHONE
6340-1 Padd.

**GREEN ST. WORKS,
PADDINGTON GREEN,
LONDON, W.2.**

ESTABLISHED
1851.

WM. BEARDMORE & CO. LTD

CONTRACTORS
FOR
ALL CLASSES
OF
= AIRCRAFT =

NAVAL CONSTRUCTION WORKS.

DALMUIR.

ALUMINIUM CASTINGS



SAND or DIE
of Every Description
2 HP to 600 HP

CHILL CASTINGS for AEROPLANES A SPECIALITY
Best Metal. Good Castings. Quick Deliveries.
Specialists to Aluminium Crank Cases, Gear Boxes etc. by Special Process

2044
CITY
4875
CROWN

2044
CITY
4875
CROWN

R.W.COAN

The Aluminium Foundry
219, GOSWELL ROAD,
LONDON,
E.C.

COAN
CASTS
CLEAN
CRANK
CASES

Contractor
to
H.M. GOVERNMENT

With the new additional Foundries,
am now open for further contracts.



HAS PROVED TO BE
UNEQUALLED
FOR AIRCRAFT WORK,

Prices of OUTFITS and ALL ACCES-
SORIES will be sent on application to—

THORN & HODDLE

ACETYLENE CO. LTD.

151 VICTORIA ST. LONDON S.W.1

near Victoria Station



Manufacturers
of
**AIRCRAFT & AIRCRAFT
ENGINES**

ELECTRIC
GENERATING
— SETS —



for
MOBILE HOSPITALS
VILLAGE LIGHTING
FARM WORK, ETC.

**BUILDERS OF PRIVATE
COMMERCIAL VEHICLES**

THE AUSTIN MOTOR CO. LD.
NORTHFIELD. BIRMINGHAM.

DEPOTS—
LONDON, MANCHESTER, NORWICH, PARIS



AUSTIN
4-5 TON LORRY

MAGNETO REPAIRS

done by us ARE GUARANTEED. We know how to properly turn out work entrusted to us, having been SPECIALISTS FOR 15 YEARS.

SPARE PARTS for all known makes stocked. For reliable execution, and promptness in returning repairs, our reputation is made

CONTRACTORS TO H.M. GOVERNMENT.
OFFICIAL REPAIRERS TO THE A.A. & M.U.

Largest Manufacturers of PLATINUM CONTACT SCREWS
in the United Kingdom.

MEAGHER & RATCLIFFE (MAGNETOS),
Phone—7091 City. 280, Deansgate MANCHESTER



PATENT

ZEPHYR PISTONS

FOR AEROPLANE ENGINES

USED EXTENSIVELY BY MANY FAMOUS ENGINE
BUILDERS ON AIR SERVICE & WAR TRANSPORT

Sole Patentees and Manufacturers:

JAMES TALBOT & DAVISON (1916), LTD.,
..... LOWESTOFT.

FOR AIRCRAFT

Superfine Quick Drying
Woodwork Copal Varnish.

White Shellac Varnish.

Woodfiller.

Undercoating & Finishing
Air Screw Varnishes.

Dope Resisting Paint.

—TO COMPLY WITH ALL—
GOVERNMENT REQUIREMENTS.

PINCHIN, JOHNSON & CO., LTD.,

Varnish & Paint Manufacturers,

Minerva House, Bevis Marks, London, E.C.3

(ESTABLISHED 1834.)

Telegrams:
"PINCHIN, ALD, LONDON."

Telephone:
AVENUE, 910 (3 lines).

Platinum Contacts

OF THE HIGHEST
GRADE ARE ESSENTIAL
TO THE SATISFACTORY
RESULTS GIVEN BY THE
MAGNETO.

We have brought our Platinum and
Iridium Contacts to the highest
pitch of perfection by specialising
in this most necessary detail.

W. H. REYNOLDS & Co.,
Key Hill Drive,
BIRMINGHAM.

ALL
CLASSES
OF
IGNITION
CONTACTS
WIRELESS
KEYS, Etc.

Wholesale only.

Phone—C1472.



GROVE
AIR-SCREW GLUE

GROVE
CLASS ONE GLUE

Sole Makers:
THE GROVE CHEMICAL CO., Ltd.,
Manufacturers of
Glues, Gelatines, Size, etc.,
CROWN WORKS, APPLEY BRIDGE.
Phone: 12 Parbold. Wires: 'Crown, Appley Bridge.

Wind Screens

Complete with Frames—
"Nonflamoid or Patent
Glass

Observation

Panels

"Nonflamoid"—Non-
inflammable Celluloid

Pressed Metal

Fittings

We have the tools
for practically all the
Standard Machines in use


THE . . .
LONDON LABEL CO., LTD.,
HARLEY WORKS,
Beckton Road, LONDON, E.16

Wires—
"Lonlabel, Canning,
London."

Phone—
East Ham, 153.
East 1300.

—INSTRUMENTS OF WAR—
OKILL INDICATORS

FOR PRESSURES — COMPRESSION
 IGNITION.

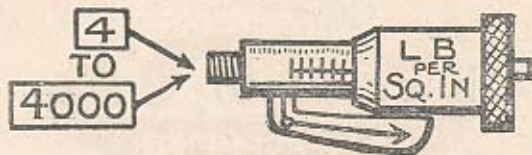

SOLE MAKERS:

G. TAYLOR (Brass Founders), Ltd.,
 All Saints Street Works, BOLTON, N.
 LONDON — BROWN BROTHERS, LTD.



WE MANUFACTURE

*Radiators, Oil Coolers, Cowls, Tanks,
 Manifolds, Exhaust Boxes, Spinings
 and Aeronautical Supplies of all Kinds.*



WE HAVE REDUCED THE RADIATOR FACTOR TO

X

X in this case is not an unknown quantity, but war conditions necessitate us hiding our light under a bushel—except—to Aero constructors employed on Government work.

Our latest radiator supplied to cool the famous 200 h.p. Hispano-Suiza engine weighs only 21 lbs., half the usual weight.

This is a commercial proposition and not an experiment. It is produced in large quantities and is the strongest, lightest, and most serviceable radiator yet produced.

**WE DELIVER TO AIR
 BOARD ALLOCATION.**

Our designers and experience are
 always at our customers' disposal.

GALLAY RADIATOR Co., Ltd.,

L. T. Delaney, Managing Director,

198, Great Portland Street, London, W.1.

L.T.D.



**J. Samuel White
& Co. Ltd.**
Aircraft Constructors
EAST COWES, I of W.
Telegrams: White, East Cowes Telephone: N93 Cowes.

— A Manual of — MOTOR MECHANICS:

FUNCTIONAL WORKING
OF THE PETROL ENGINE
... AND ...
HIGH EFFICIENCY TUNING.

A KNOWLEDGE of the general principles of the aeroplane is not complete without thoroughly understanding the functional working of the petrol engine, the fundamental principles of which remain the same in all types. The information will be found in a manual of "Motor Mechanics and High Efficiency Tuning," a standard handbook in use in Service schools, which deals with the functional working of every part of the petrol engine, in simple terms. The third edition (price 2/6 net) has been completely revised and augmented with a large number of new illustrations to increase its utility for the instructional classes of the Services. The new edition embraces the results of the most recent research on the petrol engine. Each part of the engine is taken in turn and its working dealt with at considerable length, with a special chapter giving precise instructions on the adjustment of the principal makes of carburettors, while another section deals with high efficiency tuning, for obtaining increased power, speed and greater economy.

Temple Press Ltd., 7-15, Rosebery Ave., E.C.1.
Wholesale: B. J. LARBY, Ltd., 30, Paternoster
Row, London, E.C. 4.



A SOUND ELECTRICAL TERMINAL

PATENT TERMINALS.



ROSS COURTNEY
PATENT TERMINALS




Illustration half full size.


Used for Fuse
Wires, Cables,
and Wires of all
descriptions,
Without SOLDER



Makers of

Carburettors,
Small
accurate
Turned or
Pressed Parts
for
Aero Engines
& Aeroplane
Work.

ASK FOR LIST.



Three-way Cocks.

Cocks, Unions,
Greasers,
Petrol Filters,
Filler Caps,
Control Levers,
Sight-Feeds,
Lubricators,
Compression
Taps for
Motorcar Work

ROSS COURTNEY

& CO., LTD.,

ASHBROOK ROAD, LONDON, N. 19.

MAGNETO

DYNAMO and—
STARTER REPAIRS

REPAIRS accompanied by a Class A or B Priority Certificate can receive immediate attention, and be returned without delay.

Special 48-hour Repair Service now available.

SPARE PARTS

for BOSCH, EISEMANN, U.H., SPLITDORF, DIXIE, REMY, and all AMERICAN MAGNETOS from STOCK.

Illustrated 90-page Catalogue on Application

THE RUNBAKEN MAGNETO CO., LD.,
Camp Street Works, MANCHESTER.

Telephone 8266-7 City (3 lines)
Telegrams "Runmag, Manchester."
Phone or Wire us your requirements.

RUNBAKEN MAGNETOS

Particulars on Application.

SCOTTISH AGENTS


BROWN, PRIMROSE & SMYTHE,
172, West George Street, GLASGOW.

KLAXON

Motor-driven and
Mechanically-operated

Warning Signals


(Patented in Great Britain and Abroad).

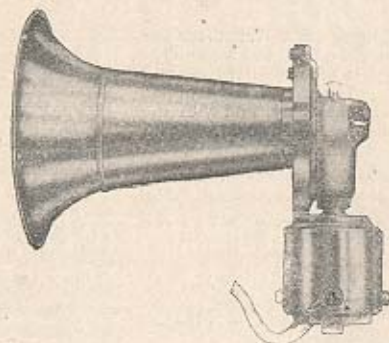

Contractors to the Air Board.

Sole Manufacturers—

THE KLAXON CO., LIMITED,
1, King Street, St. James', London, S.W. 1.

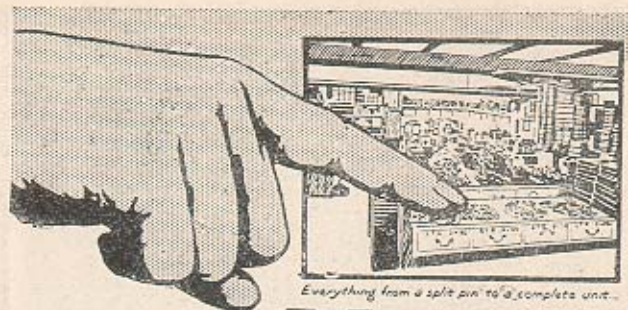

Everything from a split pin to a complete unit.

You can put your finger on what you want

at Ascol House, Long Acre. Whatever you need, maybe from a split pin to a complete unit—you can get it in our Showrooms at Ascol House—and you can be supplied without fuss, without delay, and with the certainty that whatever is supplied will bear the closest inspection.

We offer you a complete and comprehensive service in the provision of Aircraft Parts. Take advantage of our organisation and stocks.

THE AIRCRAFT SUPPLIES COMPANY LTD

Contractors to the Air Board,

Ascol House, 125, Long Acre, London, W.C.2

Representatives in Birmingham, Manchester, Leeds, Belfast, Northern Counties and Scotland, South Coast & the London District

Managing Director - - - G. H. Mansfield,

Works: Little James Street, London, W.C.1.

Telephone: Gerrard 510. Private Branch Exchange.

Telegrams: "Upcast, Royal, London."

A Journal for Aircraft Manufacturers.

Aircraft Supplies, our Fortnightly House Journal, published on alternate Thursday evenings, contains a complete list of Stock of Aircraft Parts up to the time of going to press, Current Prices, Details of New Items, Enquiry Bureau, Charts and Tables of Various Parts, and Short Articles of interest to Aircraft Manufacturers. Copies of "Aircraft Supplies" will be sent FREE to the Air Services and to the Aircraft Industry (those in charge of Stores and other Works and Service Departments only). Applications should be made on business or official paper and should state nature of contracts.



Flying—

PRACTICAL FLYING.

Complete course of flying instruction, written and illustrated by practical flying officers who have had considerable experience under Service conditions. This is the first practical work on actual training and instruction for the Flying Services, covering the whole field, from elementary groundwork to advanced flying. The following subjects are covered: The theory and practice of flight—Principles of aeroplane engines—The first lesson in the air—The first solo flight and aerodrome practice—The use and working of the instruments—Map reading (illustrated with special Ordnance Survey Maps)—Preparing for a cross-country flight—Cross-country flying—Advanced flying—Night flying, etc. A useful glossary of terms and general condensed notes for the guidance of pupils are included. 3s. 9d. net. Post free 4s.

Standard Motorcar Practice and Internal Combustion Engine—

THE MOTOR MANUAL.

21st edition (500th thousand). The standard handbook on motorcar practice. 2s. net. Post free 2s. 4d.

A MANUAL OF MOTOR MECHANICS AND HIGH-EFFICIENCY TUNING.

Deals with the complete functional working of petrol engines, carburetors, etc. Third edition (in preparation) greatly augmented, with many additional illustrations. 2s. 6d. net. Post free 2s. 9d.

THE BOOK OF THE FORD.

3rd edition. A practical handbook for users of Ford cars and vans. 2s. net. Post free 2s. 3d.

THE following Manuals are specially recommended as standard instructional works for cadets in the mechanical branches of the Services.

A complete list of Temple Press Publications will be sent post free on application.

Works on Driving—

HOW TO DRIVE A LIGHT CAR OR A CYCLOCAR.

The most complete exposition of the art of driving ever published. 1s. 6d. net. Post free 1s. 8½d.

HOW TO DRIVE A MOTORCAR.

6th edition. A key to the subtleties of motoring, as well as a very practical and well-illustrated guide to handling all types of cars. In preparation.

THE ART OF DRIVING A MOTORCYCLE.

2nd edition. A complete guide to the management of solo machines and sidecar outfits. 1s. net. Post free 1s. 2d.

Repair Work—

MOTOR REPAIR WORK.

2nd edition. A handbook on the best workshop practice. 1s. 3d. net. Post free 1s. 5d.

THE MOTORIST'S WORKSHOP.

3rd edition. A guide to metal and lathe work, 1s. 3d. net. Post free 1s. 5d.

Naval Works—

THE MARINE OIL ENGINE HANDBOOK.

4th edition. Indispensable to those in the Navy handling oil-engined craft. Includes a section illustrating and describing all the best-known marine oil engines and motor winches. Written in a self-explanatory style, with many illustrations. 2s. net in waterproof Pergamoid covers. Post free 2s. 3d.

THE MOTOR BOAT MANUAL.


A standard handbook for the motor boat services. (Temporarily out of print.)

Obtainable from all Booksellers, or direct from the Publishers:

TEMPLE PRESS LTD., 7-15, Rosebery Ave., London, E.C.1

Wholesale: E. J. Larby, Ltd., 30, Paternoster Row, London, E.C.4

THE CASE FOR "TRIPLEX."

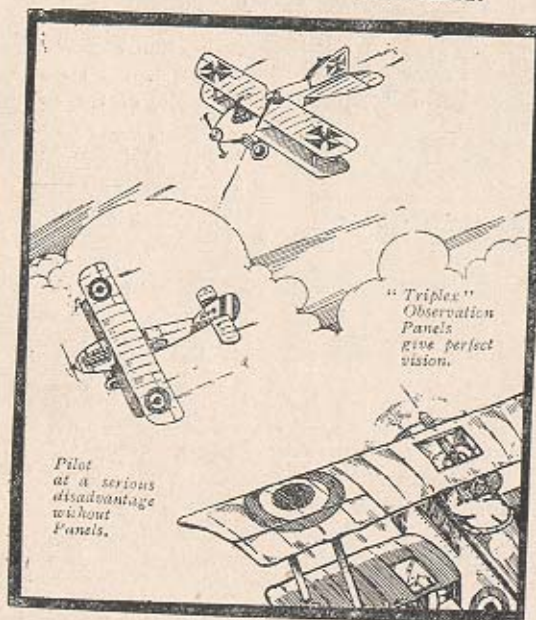

"TRIPLEX" SAFETY GLASS

for Aeroplane Observation Panels in upper and lower planes, Goggles, Windscreens, etc. Cannot "fly" or splinter, and always remains perfectly intact, no matter how badly smashed.

THE TRIPLEX SAFETY GLASS CO., LTD.
Reginald Delpech (Managing Director),
1, Albemarle St., Piccadilly, London, W. 1.

CONTRACTORS TO H.M. ADMIRALTY AND WAR OFFICE.